



INDUSTRIAL MAID

CARTRIDGE DATA SHEET


RV1226926106

Industrial-Maid
351 S. 12th Rd.
Cortland, Nebraska 68331

TF: 1-877-624-3247
Fax: 402-798-7117
www.industrial-maid.com

Replaces RoboVent 12D-26

Industrial Maid's filters are made from a premium blend of flame retardant and cellulose media. This material is especially designed for back pulse operations, and offers enhanced stability and structural integrity. All cellulose blend filters are dimpled pleated. This pleat lock helps maintain pleat spacing during operation.

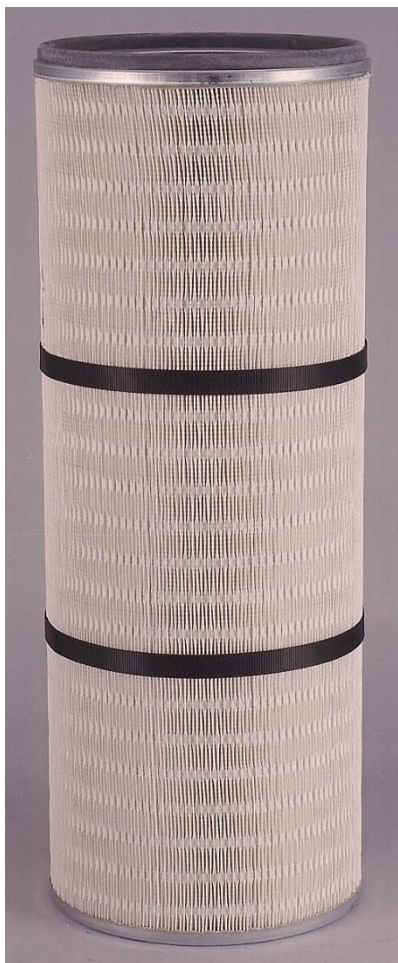

Height:	26"
Outside Diameter:	12.75"
Inside Diameter:	8.38"
Gasket:	.5"x.5" continuous natural rubber
Pleat Depth:	2"
Pleat Count:	315
Media Sq. Ft.	226 Sq Ft.
Filter Media:	FR Cell/Poly Blend
Inner Cage:	Galvanized Expanded Metal
Outer Support	2 Outer Bands
Potting Material	Urethane
End Cap Depth	.5"
Flow Capacity	500 CFM
Efficiency:	99.9 % @ 1/2 micron
Max. Operating Temp:	180° F

