


Industrial-Maid  
 351 S. 12th Rd.  
 Cortland, Nebraska 68331

TF: 1-877-624-3247  
 Fax: 402-798-7117  
 www.industrial-maid.com

TD1226926101-72482 /8PP-72482-01

**FR Cellulose-Polyester Blend Cartridge**

Industrial Maid’s filters are made from a premium blend of flame retardant cellulose and polyester. This material is especially designed for back pulse operations, and offers enhanced stability and structural integrity. All cellulose blend filters are dimpled pleated. This pleat lock helps maintain pleat spacing during operation.

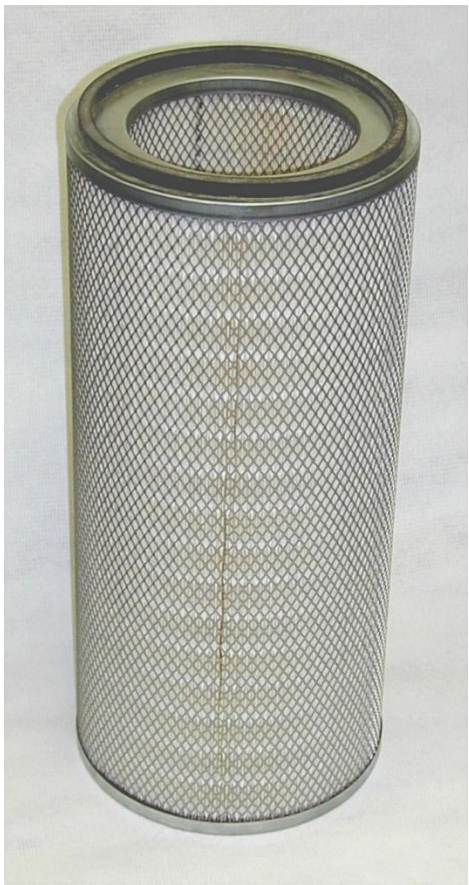

Dimensions:	12.74" x 8.38" x 26"
Style:	Open/Open
Gasket	.5"x .5" Molded Natural Rubber
Pleat Count:	314
Pleat Depth:	2"
Pleat Spacing:	Pleat lock
Filtration Area:	226 Sqft
Filter Media:	FR Cell/Poly Blend
Inner Cage:	Galv. Expanded Metal 72% Open
Outer Cage:	Galv. Expanded Metal 72% Open
End Caps:	Galvanized Metal
Pleat/End Cap Bonding:	Polyurethane
Nominal Air Flow:	500 cfm
Nominal Resistance:	1.0" wg
Efficiency:	99.5% @ .5 Micron
Max. Operating Temp:	180°F



1226926101

