



# MAX Adapter Plates

The HO MAX Adapter Plate Kit allows the user to convert a DirectConnect ski boot for use on a conventional hole pattern ski.


MAX Ski Boot Adapter Plate kits are designed to work with freeMAX and xMAX boots **ONLY**.

Ensure you have the correct size plate (size 4-8, size 7-11, or size 10-15) that matches with the size of boot that you have.

Ensure that you have the correct plate type (front or rear) for the location you are installing the boot.

## INSTALLING ADAPTER PLATE

1. Remove the footbed from boot. For xMAX and freeMAX boots, the footbed is held in with 2 Velcro strips, 1 located towards the front, under the toes, and 1 located under the arch of the foot. Release the Velcro by slowly pulling upwards on the front of the footbed and then working towards the back. The footbed can then be slid out towards the front.
2. Turn the boot upside down. Unscrew the eight mounting screws. Keep these screws as you will use them to attach the new Adapter plate.
3. Remove the DirectConnect mounting plate.
4. Slide the new MAX Adapter Plate complete with footbed into the front of the boot. Line up the new plate with the fastener holes on the boot.
5. Securely fasten the Adapter plate with the eight mounting screws from Step 2.

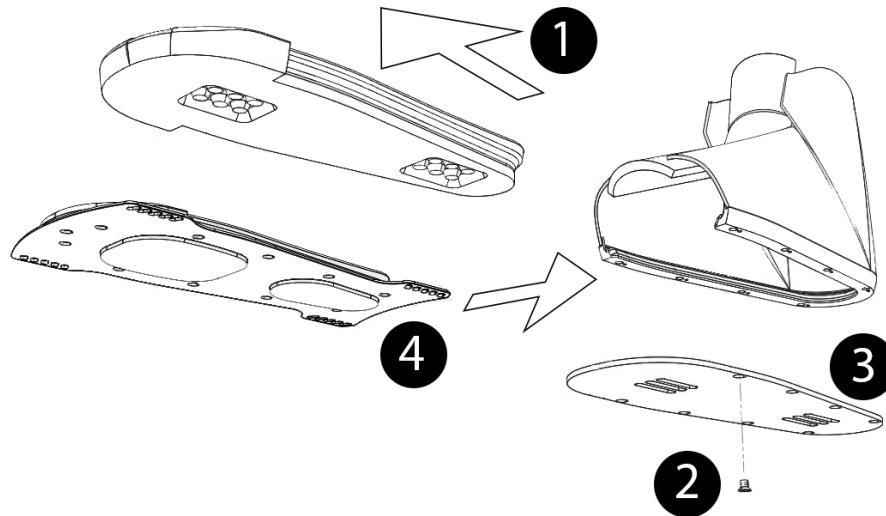

Your HO MAX Ski Boot is now ready for installation on any ski with a conventional binding hole pattern. Observe all precautions when installing the binding and observe all safety precautions when using the ski equipment.

## WARNING

Use of this product and participation in the sport involves inherent risks of injury or death. Even when properly fitted and performing as designed, ski bindings will not release from the ski. Your feet may or may not come out of the bindings in a fall which can result in injury.

To reduce risks:

- Bindings should be properly fitted for a snug, not tight fit.
- Only use bindings fitted to you.
- ALWAYS READ USER'S MANUAL BEFORE USE.