
Part #

# 4003-STEM-Curve

| Туре        |  |
|-------------|--|
| Project     |  |
| Catalog No. |  |

## **IMAGE**

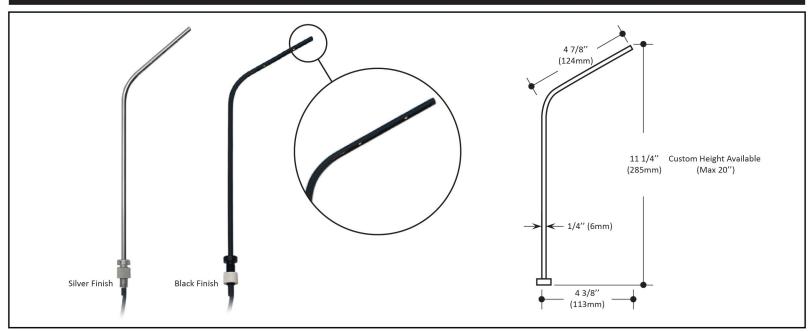

## **DESCRIPTION**

- Ultra slim 1/4" (6mm) diameter.
- Zen-Like ultra clean minimalist design.
- 100° ultra wide beam angle to cover longer items not requiring a spot focus.
  Creates an ambience in the showcase.
- High colour accuracy of 90+ CRI.
- 3W total with a 290 lumens of illumination.
- Custom stem heights available up to a maximum of 20".
- Stem height is Tuneable on site for exact site conditions.
- Custom finishes available.
- cULus Listed.

## **FEATURES**


- Showcase Lighting
- Retail Displays
- Exhibit Lighting

# **SPECIFICATIONS**

| Input Voltage | Remote driver 110 VAC in 350mA out                 |  |
|---------------|--|--|
| Wattage       | зw   |  |
| Colour Temp   | 2700K / 3000K / 4000K / 5000K                      |  |
| Lumen Output  | 290 Lm@3000K; 95Lm/W                               |  |
| CRI           | >90  |  |
| Beam Angle    | 100°   |  |
| Power Factor  | 0.93   |  |
| Lamp Life     | >50,000 hours                                      |  |
| Environment   | IP20   |  |
| Certification | cULus  |  |
| Warranty      | 5 years - see published warranty terms for details |  |

\* Product specifications subject to change without notice.

## **ORDERING INSTRUCTIONS**



Example: 4003-STEM-Curve-10-30-BK = 4003-STEM-Curve, height 10 inches, 3000K, black finish



www.revlite.com info@revlite.com Phone: 416-299-7211








## Part #

# 4003-STEM-Curve


| Туре        |  |
|-------------|--|
| Project     |  |
| Catalog No. |  |

## WIRING DIAGRAM - For reference purposes only. Not for installation. Not to scale.


## Plug and Play wiring

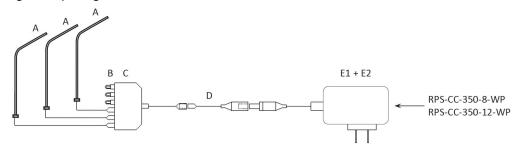


### Alternate Plug and Play wiring

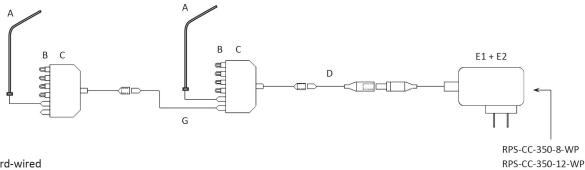

### Hard-wired

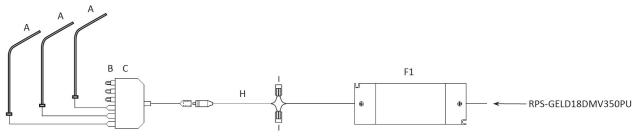

### Alternate Hard-wired

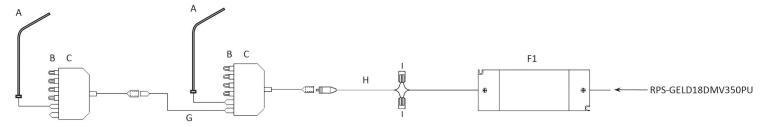

Max wiring distance between power supply and fixture is 20 feet. Up to six fixtures can be wired to a single distribution box (CC-6SP-500).

| Α  | 4003 - STEM - Curve   |   | RPS-GELD18DMV350PU, Constant Current Power Supply-Hardwire    |
|----|---|---|---|
| В  | CC-6SP-JP (Jumper)  |   | (Min. # fixtures = 1, Max. # fixtures = 16)                   |
| С  | -6SP-500 (5 jumpers included)   |   | CC-1000-2, Constant Current extension cables in 1M, 1.5M & 2M |
| D  | CC-AD00-2, 4" adapter cable. Male DC converter plug to male constant current      |   | CC-1500-2, CC-2000-2  |
| E1 | RPS-CC-350-8-WP, Constant Current Power Supply- Plug n Play (Max. # fixtures = 7) | Н | CC-100-01M, 4" Constant Current Male with pigtail             |
| E2 | RPS-CC-350-12-WP, Constant Current Power Supply- Plug n Play (Max. # fixtures=10) | I | 221-412, Wire Clamp   |





