


Type	
Project	
Catalog No.	

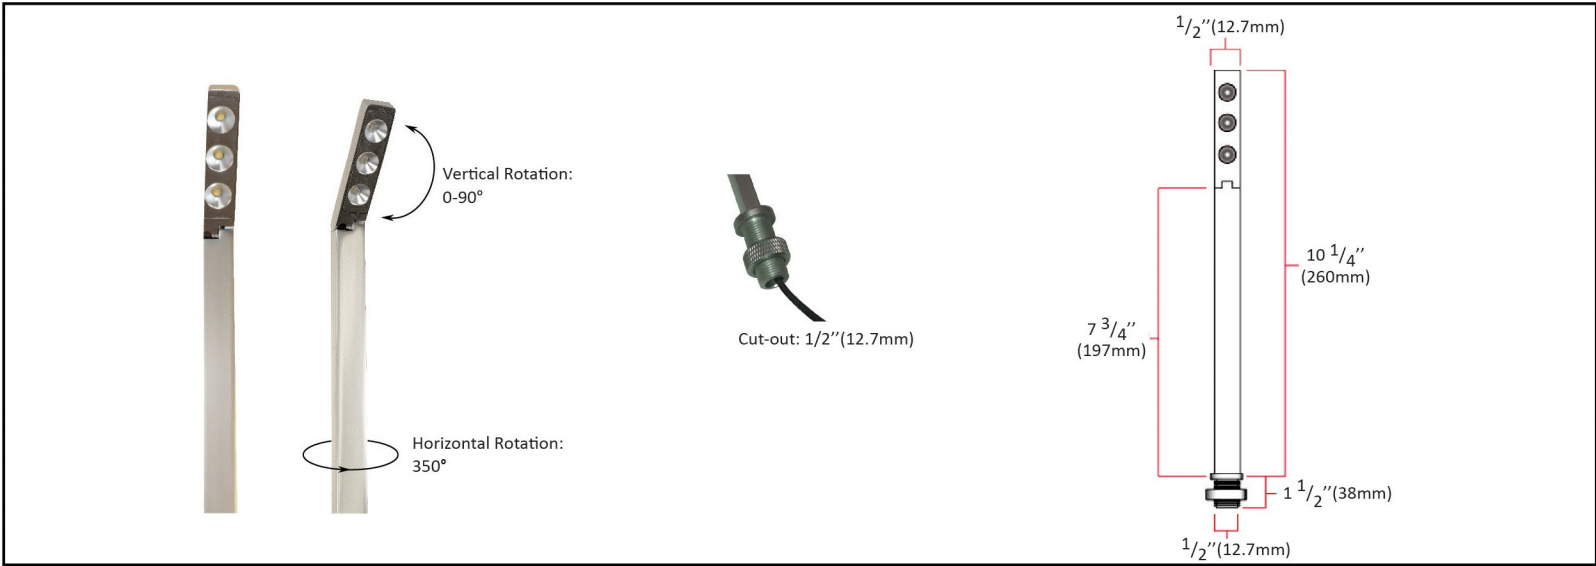

**DESCRIPTION**

- The original design brief was to produce a showcase fixture that would become the workhorse of showcase LED lighting fixtures. Its simple design has evolved to become a cubist work of art in itself and a minimalist design which is the hallmark of all RevLite design.
- Similar architecture and functionality as the 4003 original with cleaner lines and simplified mechanicals.
- Light head swings through an arc of 90°.
- High colour accuracy of 90+ CRI.
- 3W total from 3 separate LEDs with 418 lumens of illumination.
- Fixed stem heights of 8", 12" 20" or Custom stem heights available up to a maximum of 20" (510mm).
- Custom finishes available including the new real carbon fibre finish with solid carbon stem.
- cULus Listed.

**FEATURES**

- Rotatable light heads with straight stem
- Ultra clean minimalist design
- High colour accuracy

**APPLICATIONS**


- Showcase Lighting
- Retail Displays
- Exhibit Lighting

**SPECIFICATIONS\***

Input Voltage	120-277 VAC (universal)
Current	350mA
Wattage	3W
Colour Temp	2700K / 3000K / 3500K / 4000K / 5000K
Dimming	N/A
Lumen Output	418 lumens**
CRI	>90
Beam Angle	60°
Lamp Life	50,000 hours
Environment	IP20
Certification	cULus
Warranty	5 years - see published warranty terms for details

\* Product specifications subject to change without notice.  
 \*\* Lumen data based on 4000K.

**ORDERING INSTRUCTIONS**

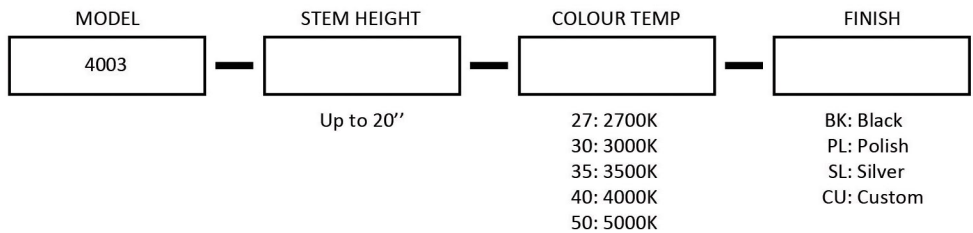


Example: 4003-08-30-SL = 4003 with stem height of 8 inches, 3000K, silver finish


Type	
Project	
Catalog No.	

**WIRING DIAGRAM - For reference purposes only. Not for installation. Not to scale.**


**Plug and Play wiring**

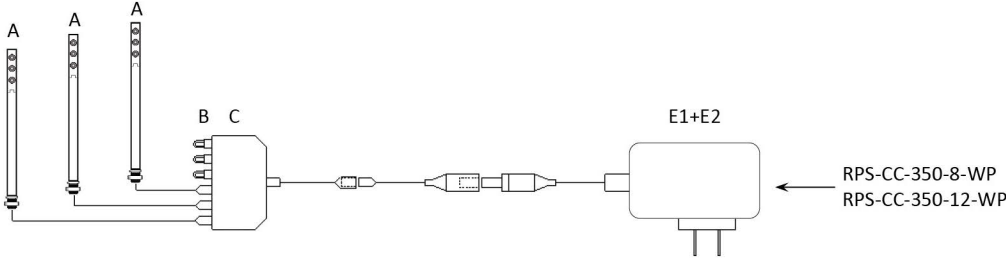


**Alternate Plug and Play wiring**

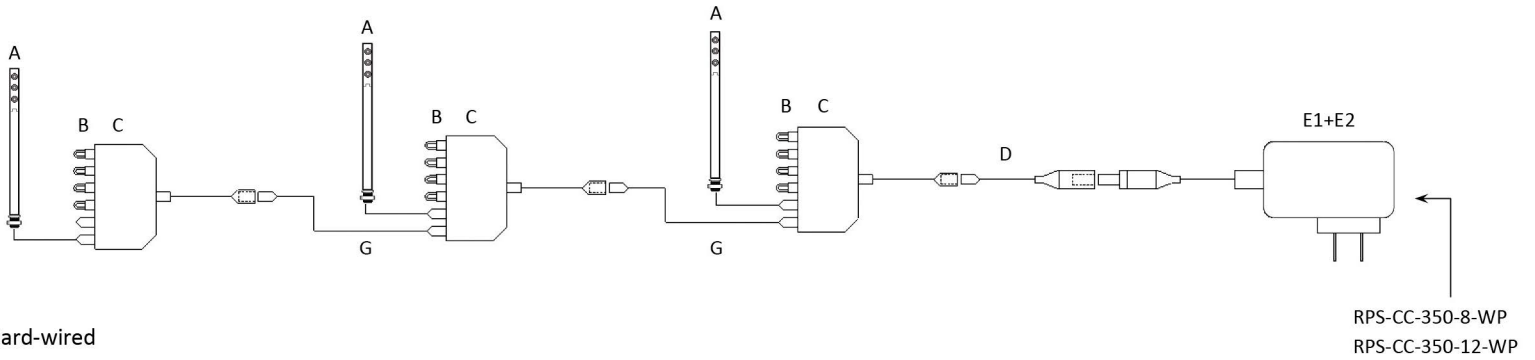

**Hard-wired**

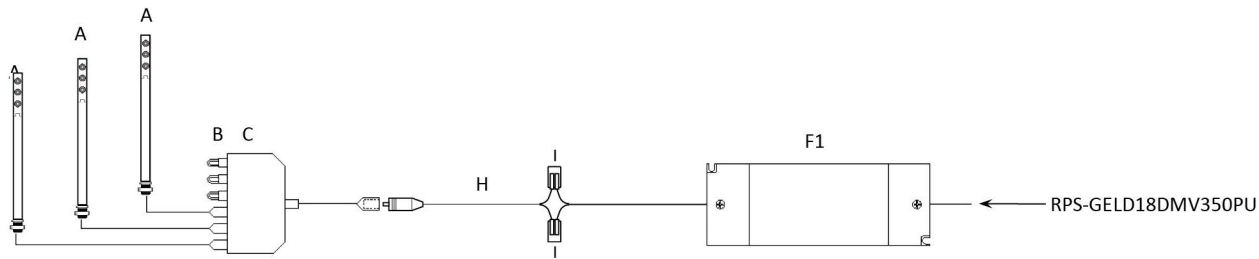

**Alternate Hard-wired**

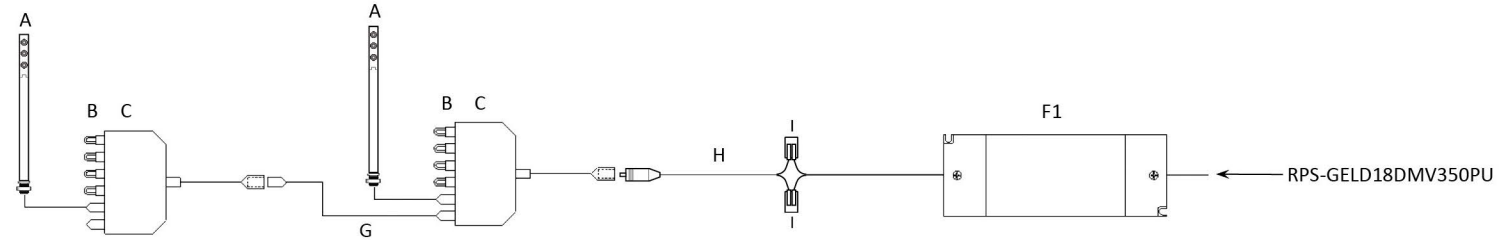

Max wiring distance between power supply and fixture is 20 feet. Up to six fixtures can be wired to a single distribution box (CC-6SP-500).

<b>A</b>	Reed Series - Classic	<b>F1</b>	RPS-GELD18DMV350PU, Constant Current Power Supply-Hardwire (Min. # fixtures = 1, Max. # fixtures = 16)
<b>B</b>	CC-6SP-JP (Jumper)	<b>G</b>	CC-1000-2, Constant Current extension cables in 1M, 1.5M & 2M CC-1500-2, CC-2000-2
<b>C</b>	CC-6SP-500 (5 jumpers included)	<b>H</b>	CC-100-01M, 4" Constant Current Male with pigtail
<b>D</b>	CC-AD00-2, 4" adapter cable. Male DC converter plug to male constant current	<b>I</b>	221-412, Wire Clamp
<b>E1</b>	RPS-CC-350-8-WP, Constant Current Power Supply- Plug n Play (Max. # fixtures = 7)		
<b>E2</b>	RPS-CC-350-12-WP, Constant Current Power Supply- Plug n Play (Max. # fixtures=10)		