

Type	
Project	
Catalog No.	



DESCRIPTION

Recessed ceiling down light series of aluminum passively cooled heat sinks of up to 30W of power. Heat sink and optical assembly can swing down 60° to illuminate wall art or objects of interest. Light outputs of 2700 lumens available with CRI as high as 93.

FEATURES

- 30 Watt LED arrays, 3000°K >90CRI
- 2700 lumens
- Three beam angles available
- Proprietary Aluminum heat sinks allow rotation of entire light engine to allow illumination of the wall or objects of interest. Heat sink also ensures maximum LED life
- LED power supplies suitable for indoor and outdoor use 120-277VAC input standard
- 0-10 volt dimming standard
- c UL us listed for damp locations
- c UL us listed J-box
- Galvanized plaster frame, junction box with 27" galvanized hanger bars with adjustable butterfly brackets
- Finished with aluminum trim with frosted acrylic lens

SPECIFICATIONS

Model	
Input Voltage	120-277 VAC (universal)
Wattage	30 W
Dimming	0-10 V or Triac*
Colour	2700K / 3000K / 4000K / 5000K
Lumens	2850 lumens
Efficacy	95 lm/W
CRI	> 80
Beam Angle	15° / 24° / 50°
Power Factor	> 0.9
Lamp Life	50,000 hrs
Environment	IP 20
Certifications	c UL us
Warranty	5 Years -See published warranty terms for details


ORDERING INSTRUCTIONS

MODEL	WATTAGE	BEAM ANGLE	COLOR TEMP	COLOUR ACUITY	TRIM	DRIVER
DZS	30					
		15: 15 Deg 24: 24 Deg 50: 50 Deg	27: 2700K 30: 3000K 40: 4000K 50: 5000K	80: 80+ CRI 90: 90+ CRI G: High GAI	WH: White SL: Silver BL: Black	ND: Non-dimming 10: 0-10V dimming TR: Triac


Example: DZS-30-15-27-80-ND = DZS 30W, 15 degree beam angle, 2700K, 80+ CRI, non-dimming

PHOTOMETRICS

3000K: 15°

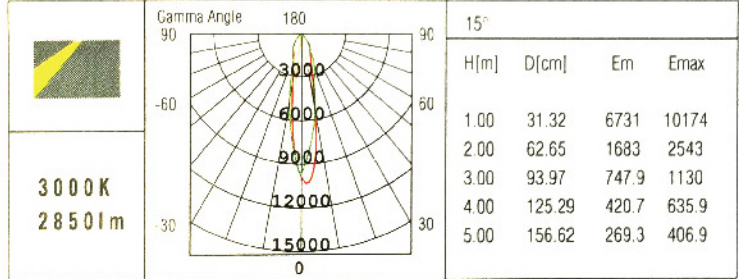

3000K: 24°

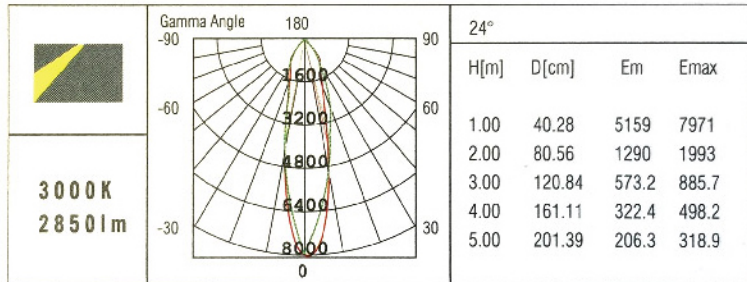

3000K: 50°

