


Type	
Project	
Catalog No.	


*Measurement in mm




EU-01




EU-02

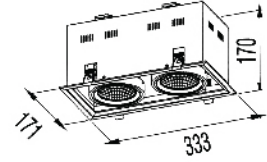

EU-03

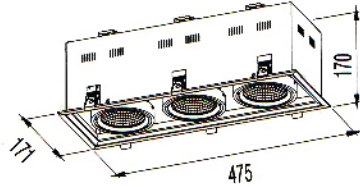

EU-04

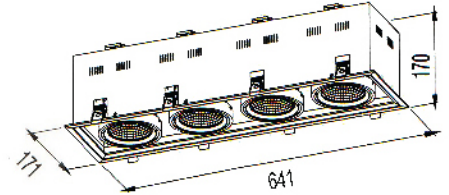

DESCRIPTION

Designed for new construction applications this gimbaled square opening specification grade LED down light is available in a 12W, 25W and 35W configuration. Incorporating the latest LED technology, the 12W light head produces the lumen equivalent of a 75W PAR30 providing both energy savings and low maintenance costs.

FEATURES

- 1000+ lumens from 12W, 2000+ lumens from 25W, 3000+ lumens from 35W
- CRI of 80+ and 90+
- Optical inner reflector provides precise beam control with reduced glare while the acrylic lens diffused the light output for a halogen lamp like appearance
- Proprietary heat sink design provides superior thermal management ensuring a minimum of 50,000 hrs of operation while maintaining a minimum of 70% lumen output
- Butterfly style mounting brackets provide up to 5" vertical adjustment which can accommodate ½" EMT
- The junction box allows through branch wiring with (3) ½" knockouts

SPECIFICATIONS

Input Voltage	120-277 VAC (universal)
Wattage	12W / 25W / 35W
Dimming	0-10V or Triac
Colour Temp	2700K / 3000K / 3500K / 4000K
Lumen Output	1000 - 3000 lumens
Efficacy	95.3 lm/W
CRI	80+ – 90+
Beam Angle	15° / 24° / 38° / 50°
Power Factor	0.91
Lamp Life	50,000 hours
Environment	IP20
Certification	cULus
Warranty	5 years - see published warranty terms for details

* Product specifications subject to change without notice.

ORDERING INSTRUCTIONS

MODEL	WATTAGE	COLOUR TEMP	CRI	BEAM ANGLE	DRIVER	INTERIOR FINISH	TRIM	GIMBAL FINISH	TRIM FINISH
EU-									
01: 1 Light Head	12: 12W	27: 2700K	80: 80+ CRI	15: 15 Deg	ND: Non-Dimming	BL: Black	T: Aluminum Trim	BL: Black	BL: Black
02: 2 Light Head	25: 25W	30: 3000K	90: 90+ CRI	24: 24 Deg	10: Dimming 0-10V	WH: White		WH: White	WH: White
03: 3 Light Head	35: 35W	35: 3500K		38: 38 Deg	TR: Triac			SL: Clear	SL: Silver
04: 4 Light Head		40: 4000K		50: 50 Deg				Anodized	CU: Custom

Example: EU-01-12-30-80-24-ND-BL-T-BL-SL = EU 1 light head, 12W, 3000K, 80+CRI, 24 degree beam angle, non-dimming, black interior finish, aluminum trim, black gimbal finish, silver trim finish