

DESCRIPTION

Designed for new construction applications. This 6" fixed reflector luminaire houses a specification grade modular LED down light in 26W and 35W configuration. Incorporating the latest LED technology, this luminaire produces the lumen equivalent of up to a 150W halogen bulb providing both energy savings and low maintenance costs. Gasketed trim for wet (IP65).

FEATURES

Mechanical

- Housing constructed of 0.20" satin coated steel for a robust long life luminaire
- Butterfly style mounting brackets provide up to 5" vertical adjustment which can accommodate ½" EMT
- The junction box allows through branch wiring with 3 ½" knockouts
- UL certified for damp and wet locations with the appropriate trims. See ordering instructions for various options

Electrical

- 2350 lumens (26W), 3000 lumens (35W)
- CRI ≥ 81.5
- Modular LED array assembly with colour temperature options of 2700K, 3000K, 3500K and 4000K
- 120-277 VAC high efficiency, high power factor driver ≥ 0.91
- Dimmable driver using 0-10V protocol with a dimming range of 10-100% and triac

Optics

- Optical primary reflector of aluminized polycarbonate with optional beam angles provides precise beam control with reduced glare
- Secondary reflector of spun aluminum
- Third stage exterior lens of high impact acrylic lens diffuses the light output for a halogen lamp like appearance

Trim

- Standard trim is a die cast aluminum trim with a standard polyester matte white powder coat, salt spray tested for 1000 hours
- Custom colours are available as options
- A gasketed trim option is also available. See ordering instructions for various options

SPECIFICATIONS

Input Voltage	120-277 VAC (universal)
Wattage	26W / 35W
Colour Temp	2700K / 3000K / 3500K / 4000K
Dimming	0-10V 10%-100% range / triac
Lumen Output	2350 lm / 3000 lm; 80-120 lm/W
CRI	>81.5
Beam Angle	24° / 34° / 52°
Power Factor	0.91
Lamp Life	50,000 hours
Environment	IP65
Certification	cULus
Warranty	5 years - see published warranty terms for details

* Product specifications subject to change without notice.

Photometrics

- Photometrics tested to IESNA LM-79-80 standard by an accredited photometric laboratory

Thermal Management

- Proprietary heat sink design provides superior thermal management ensuring a minimum of 50,000 hrs of operation while maintaining a minimum of 70% lumen output

Listing

- Fixture is certified to UL 1598 and UL 8750 standards by Underwriters Laboratories. Certified to IP65 per IEC 60598

Warranty

- One (1) year warranty against defects in materials and workmanship
- Warranty period is for 5 years when installed according to Revlite installation instructions and the electrical industry best practices. The five (5) year warranty is the direct replacement of LED lamps and drivers for defects resulting in a lumen depreciation of the fixture of 30% or greater

Type	
Project	
Catalog No.	


ORDERING INSTRUCTIONS

MODEL	TYPE	TYPE	LUMEN OUTPUT	COLOUR TEMP	BEAM ANGLE	COLOUR ACUITY	TRIM	TRIM FINISH	DRIVER
L3000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	G: Gimbal F: Fixed	R: Round S: Square	20: 2000 lumens 30: 3000 lumens	27: 2700K 30: 3000K 35: 3500K 40: 4000K	24: 24 Deg 34: 34 Deg 52: 52 Deg	80: 80+ CRI 90: 90+ CRI G: High GAI	AL: Die cast aluminum G: Gasketed trim	WH: Matte white SI: Silver BL: Black	ND: Non-dimming L: 0-10V dimming TR: Triac

Example: L3000-G-R-20-30-24-80-AL-WH-ND = L3000, gimbal, round, 2000 lumens, 3000K, 24 degree beam angle, 80+ CRI, die cast aluminum trim, matte white trim finish, non-dimming

PHOTOMETRICS

3000K: 15°

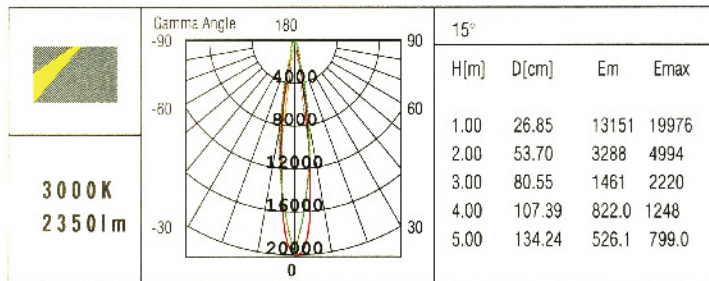

3000K: 24°

