


Type	
Project	
Catalog No.	

IMAGE

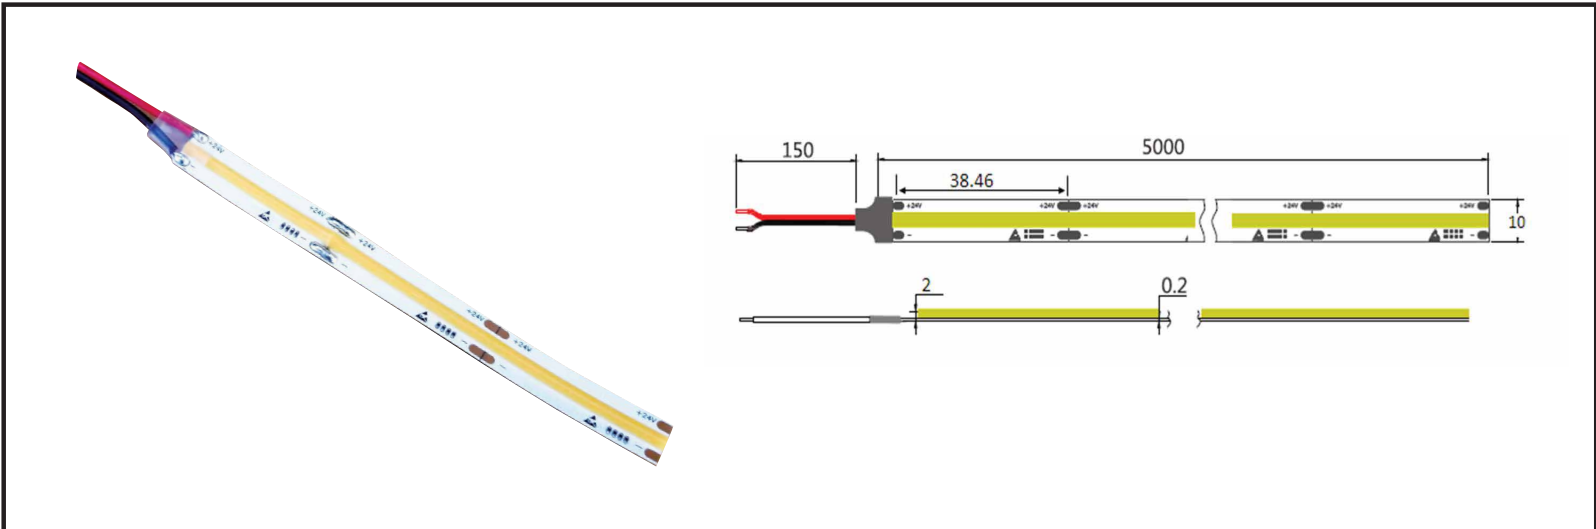

DESCRIPTION

- Linear C.O.B.**
- Cove lighting in large commercial areas, retail, hospitality.
 - Backlit Signage.
 - Fluorescent replacement.
 - Ambient lighting in commercial office spaces.
 - Backlighting of translucent stone elements in hospitality.
 - Backlighting and edge lighting of glass elements and objects.
 - Toe-kick lighting.
 - Backlighting of small objects.

SPECIFICATIONS

Input Voltage	24V DC
Wattage	4w/ft (13w/m), 6w/ft(19w/m)
Colour Temp	2700K / 3000K / 3500K / 4000K / 5000K / 6000K
Lumen Output	395 lumens/ft, 467 lumens/ft
CRI	90 ⁺
Beam Angle	170°
Lamp Life	50, 000 hours
Environment	IP20
Certification	cULus
Warranty	5 years if driver supplied by Revlite
Reel Length	5m / 16.4ft

* Power levels of 4-6W/Ft or higher, requires an accessory heat sink for thermal stability or the life span of the LEDs will be seriously negatively affected and will not meet expected lifespan.
 * Product specifications subject to change without notice.

ORDERING INSTRUCTIONS

