


Type	
Project	
Catalog No.	

**IMAGE**

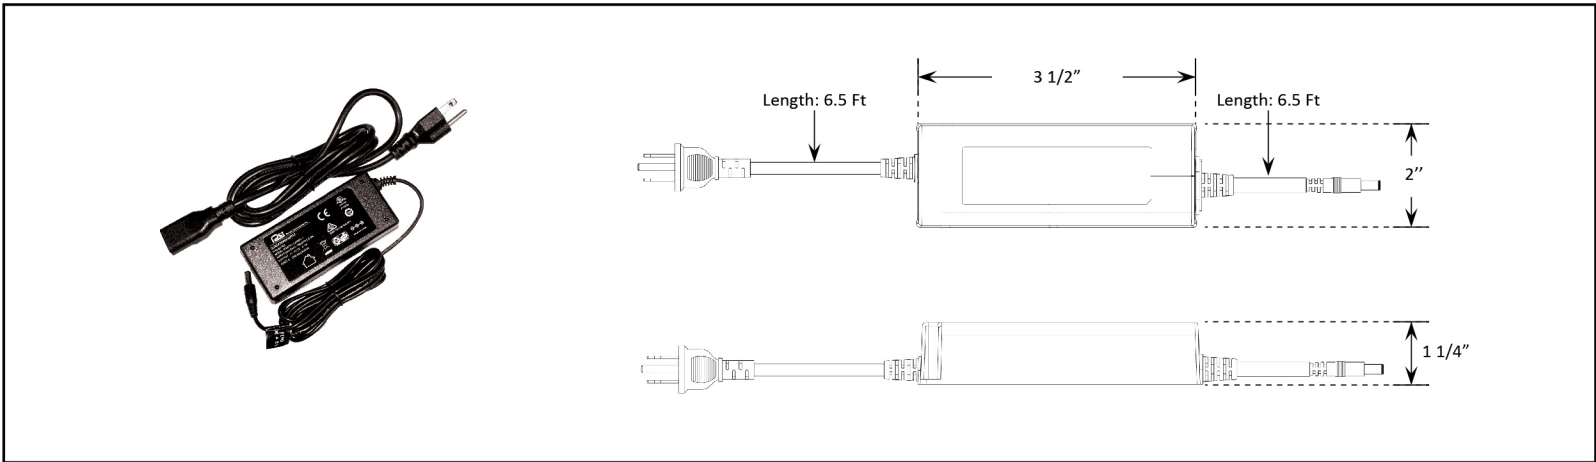

**DESCRIPTION**

RevLite's power supply is one 60W single-output external LED power supply series. Pairing the North American type of AC plug and the prevailing DC connectors, RPS-1260-120-240, working like an adaptor, simplifies the connection with LED lighting fixtures by using a DC connector direct plug in. The entire series is certified with the cULus listed for dry and damp locations.

As a class 2 design, the enclosure of RPS-1260-120-240 is a 94V-0 flame retardant plastic case. The interior is fully potted with silicone that enhances the heat dissipation. With the working efficiency up to 91%, RPS-1260-120-240 is cooled by free air convection; the working temperature ranges from -40°C to +70°C.

**FEATURES**

- Universal AC input/full range
- Built-in active PFC function
- High efficiency up to 91%
- Protections: short circuit/over current/over voltage/over temperature
- Class 2 power unit
- No load power consumption < 0.15W
- Energy efficiency level VI
- Comply with EISA 2007 DoE and NRCan
- cULus listed, suitable for dry and damp locations
- 5 years warranty

**APPLICATIONS**

- LED Lighting Fixture
- LED Decorative Lighting
- LED Office Lighting
- General Electronic Products in Dry or Damp Environment

**ORDERING INSTRUCTIONS**

MODEL  
  
 RPS-1260-120-240

Example: RPS-1260-120-240

**SPECIFICATIONS**

Model No.	RPS-1260-120-240
Type	Desktop DC power supply
Dimming	Dimmable with RL-DIM-PWM
Dimension	3 1/2" L x 2" W x 1 1/4" H
Input/Output	100-240VAC / 24VDC
Wattage	60W MAX
Certificate	cULus listed, Class 2

\* Product specifications subject to change without notice.