


Type	
Project	
Catalog No.	

## IMAGE

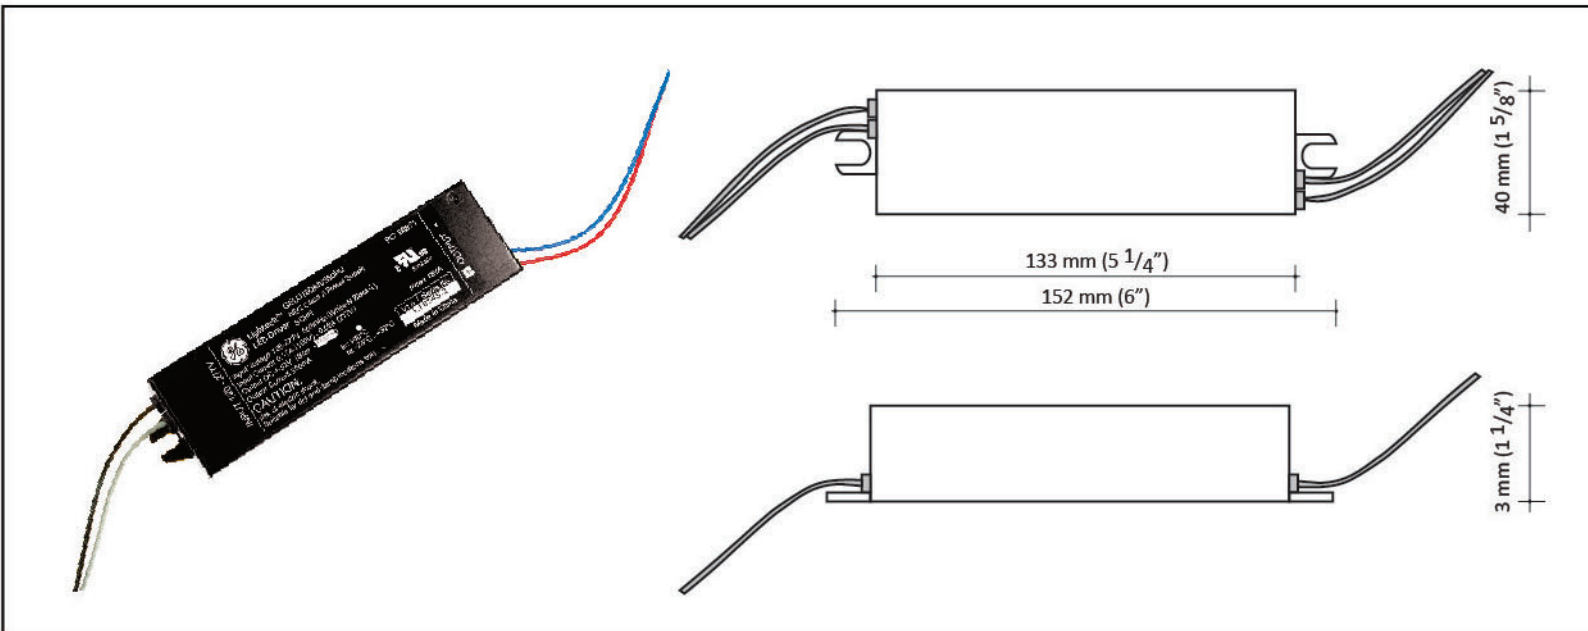

## FEATURES

- LED 18W DC 350mA - LED Driver, Constant Current, Aluminum Housing, Potted, with Leads
- Current: DC
- Dimmable with Trailing Edge dimmers
- Designed for IP67
- Reinforced insulation from input to output
- High efficiency, PFC: > 0.95
- Fully protected: Short circuit, Input voltage surge, Thermal, Secondary switch, Overload regulation, Over voltage protection. Self-resettable
- Soft start

## ORDERING INSTRUCTIONS

MODEL



RPS-GELD18DM-V350PU

## SPECIFICATIONS

Enclosure Type	Metal
Working Temp [Min]	-25°C - 50°C
Case Temperature (Max)	80°C
Primary Application	LED in- and outdoor lighting
	Street lighting
	Architectural lighting
	Signs
	Ambience lighting
CC/CV Value	350 mA
Output Power (W)	18 W
Output Current (A)	0.35A
Output Voltage	4V - 52V
Input Current Range (Min)	0.17A
Input Voltage Range (Min) (V)	0.09A
Input Voltage Range (Max)	120V

\* Product specifications subject to change without notice.