


Type	
Project	
Catalog No.	

IMAGE

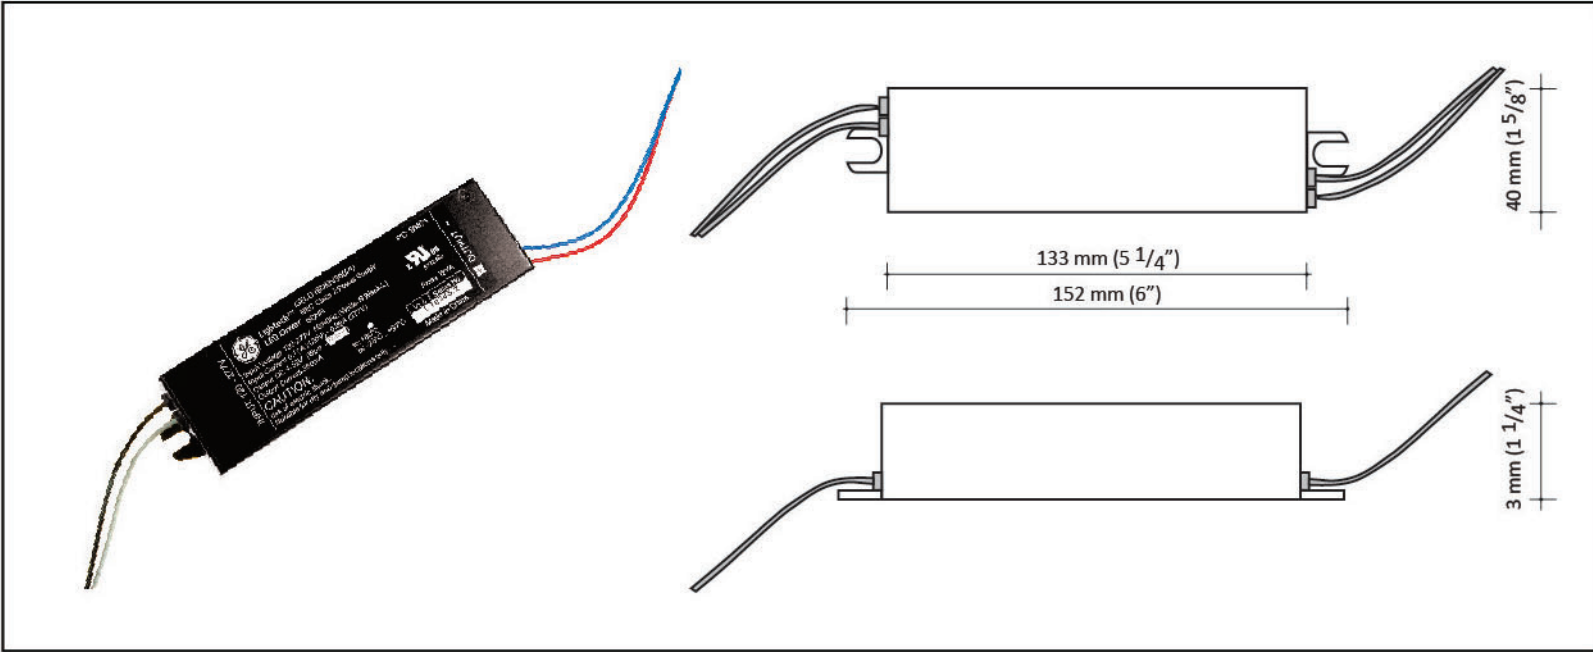

FEATURES

- LED 18W DC 350mA - LED Driver, Constant Current, Aluminum Housing, Potted, with Leads
- Current: DC
- Dimmable with Trailing Edge dimmers
- Designed for IP67
- Reinforced insulation from input to output
- High efficiency, PFC: > 0.95
- Fully protected: Short circuit, Input voltage surge, Thermal, Secondary switch, Overload regulation, Over voltage protection. Self-resettable
- Soft start

SPECIFICATIONS

Working Temp [Min]	-25°C - 50°C
Case Temperature (Max)	80°C
Primary Application	LED in- and outdoor lighting
	Street lighting
	Architectural lighting
	Signs
	Ambience lighting
CC/CV Value	700 mA
Output Power (W)	18 W
Output Current (A)	0.7A
Output Voltage (Min)	4V
Output Voltage (Max)	26V
Input Current Range (Min)	0.17A
Input Voltage Range (Min) (V)	0.09A
Input Voltage Range (Max)	120V

ORDERING INSTRUCTIONS

MODEL



RPS-GELD18DM-V700PU

* Product specifications subject to change without notice.