


Type	
Project	
Catalog No.	

IMAGE

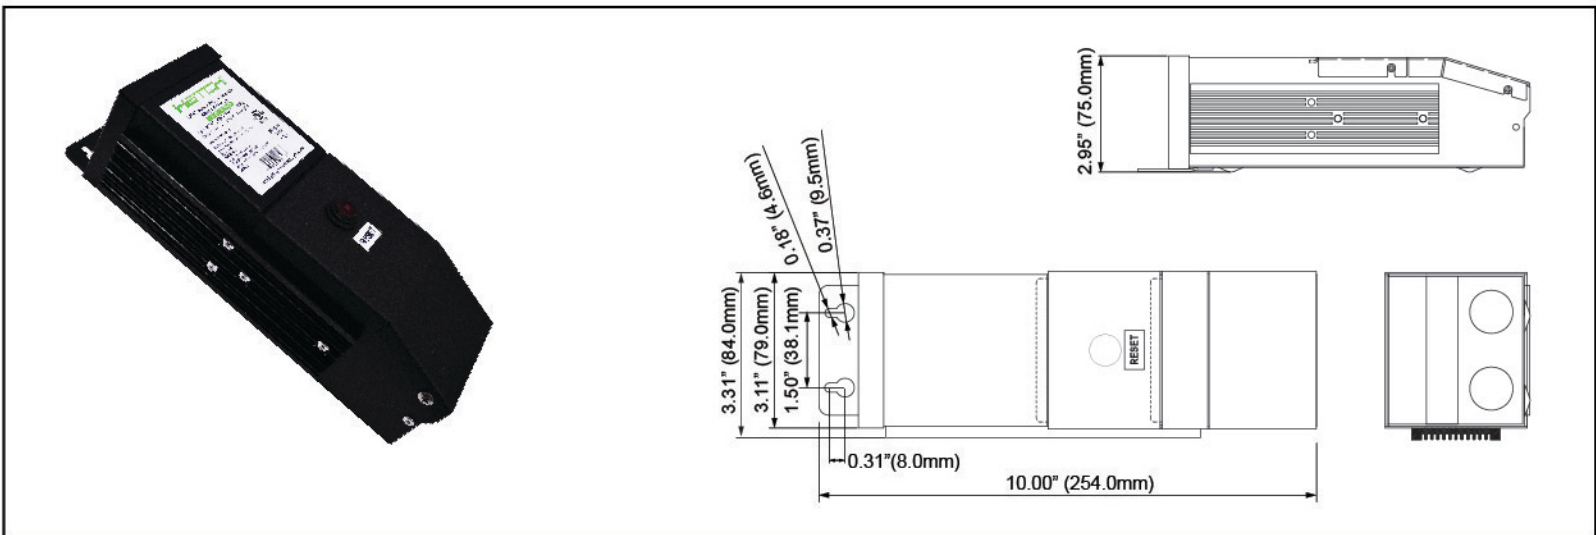

FEATURES

- Overload protection with reset
- Suitable for indoor and outdoor use
- Operating temperature range: -20°C to 40°C (measured at case)
- Knockout wiring compartment
- For best dimming performance, use a CL-style dimmer (Please check dimmer minimum load requirement)
- 120VAC and 277VAC tap all-in-one
- Field or factory installable unit
- Rated for Outdoor Use (Rain Tight)
- Equivalent to NEMA 3R rating


SPECIFICATIONS

Input Voltage	120-277VAC(universal)
Wattage	60W
Output Voltage	24V DC
Max Output Current	2.50A
Dimming	MLV TRIAC
Input	0.87 / 0.37
Power Factor	>0.80
Efficiency	72%
Environment	IP20
Certification	cULus
Warranty	5 years - see published warranty terms for details


* Product specifications subject to change without notice.

WIRING DIAGRAMS

120V TAP CONNECTION

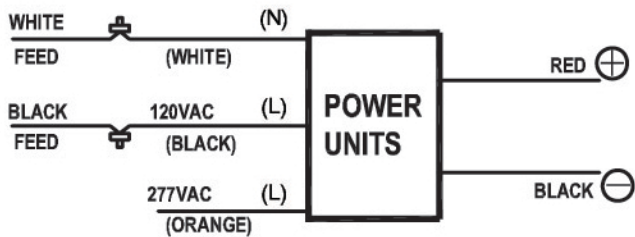

277V TAP CONNECTION

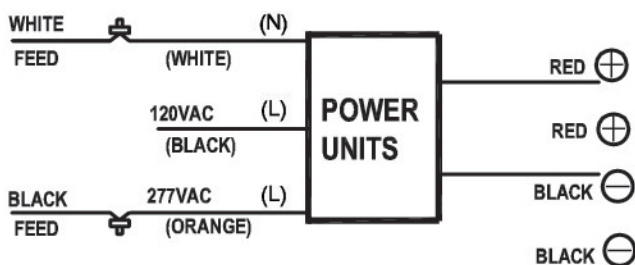

Be sure to cap off the unused input tap

ORDERING INSTRUCTIONS

MODEL

RPS-LV60-24T-1227-KK