


Type	
Project	
Catalog No.	

IMAGE & SIZE

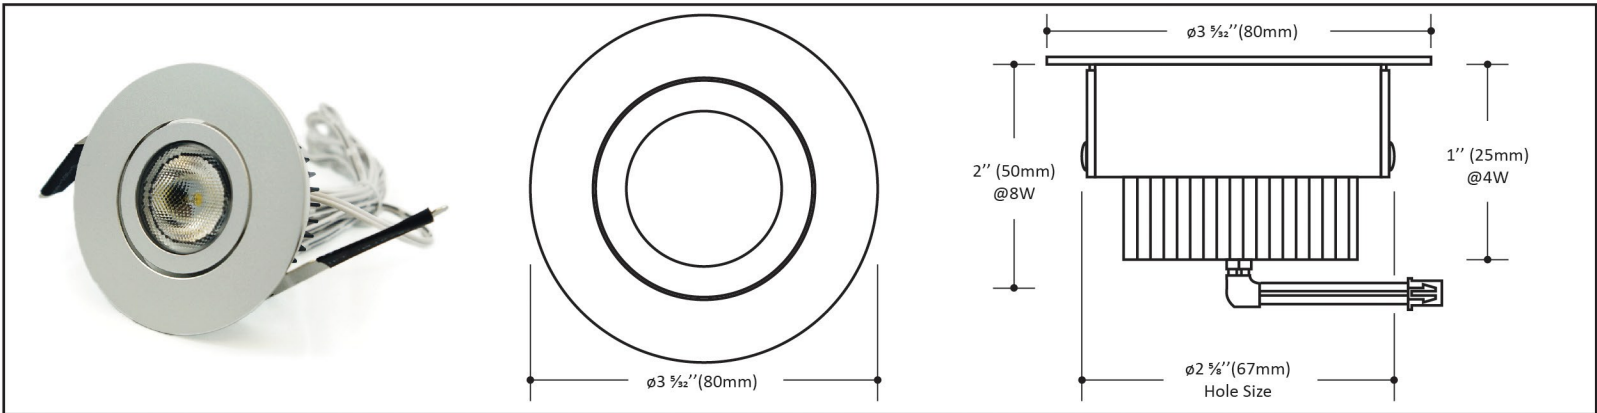

DESCRIPTION


- Recessed mounting, high colour rendering fixture, designed with adjustable Gimbal.
- 20° swivel
- The first with a Single COB LED in 4 CCT
- 3 Beam Angles: 20° / 30° / 45°
- 2 Power outputs: 4W or 8W.
- 8W Version at 800 lumens is truly capable of fully illuminating a display from an 8' height.
- Now with the Revolutionary Constant Voltage Drive (CVD). Allows operation at a simple 24VDC input in either 4W or 8W configurations
- Allows hook up of several Gimbal fixtures to one power supply.
- No more "Hot Plugging" concerns
- No more calculating the Vf for constant current power supplies.

SPECIFICATIONS

Colour Temp	3000K	4000K	5000K
LED Quantity	1 COB LED		
Input	24VDC		
Wattage	4W / 8W		
Lumen Output	360lm@ 4W / 720lm@ 8W	400lm@4W / 800lm@8W	420lm@4W / 820lm@8W
Efficacy	92 lm/W	102 lm/W	105lm/W
Beam Angle	20° / 30° / 45°		
Lamp Life	50,000hrs		
Dimensions	ø 3 1/2" (80mm) 4W: 1" (25mm) mounting depth / 8W: 2" (50mm) mounting depth		
Cut-out	ø2 1/4" (67mm)		
Environment	Dry		
Warranty	5 years - see published warranty terms for details		

* Product specifications subject to change without notice.

ORDERING INSTRUCTIONS

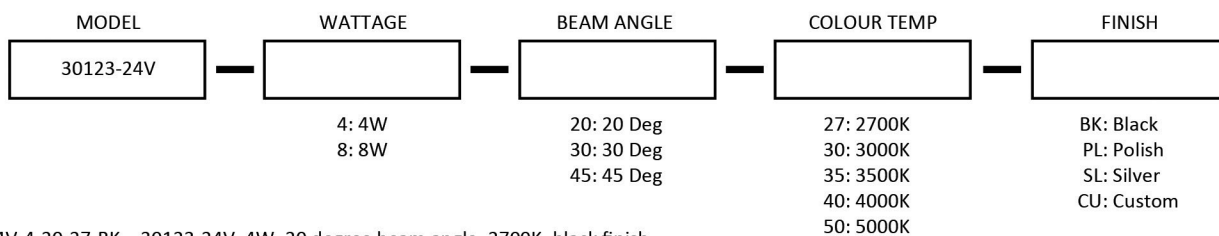


Example: 30123-24V-4-20-27-BK = 30123-24V, 4W, 20 degree beam angle, 2700K, black finish


Type	
Project	
Catalog No.	

WIRING DIAGRAM - For reference purposes only. Not for installation. Not to scale.


Plug and Play wiring

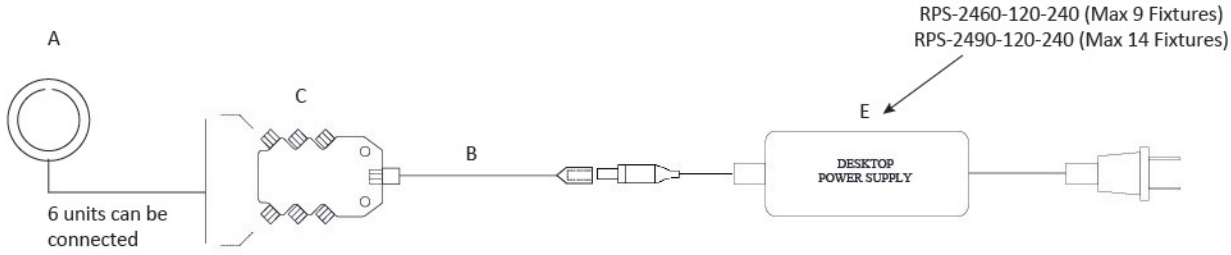


Alternate Plug and Play wiring

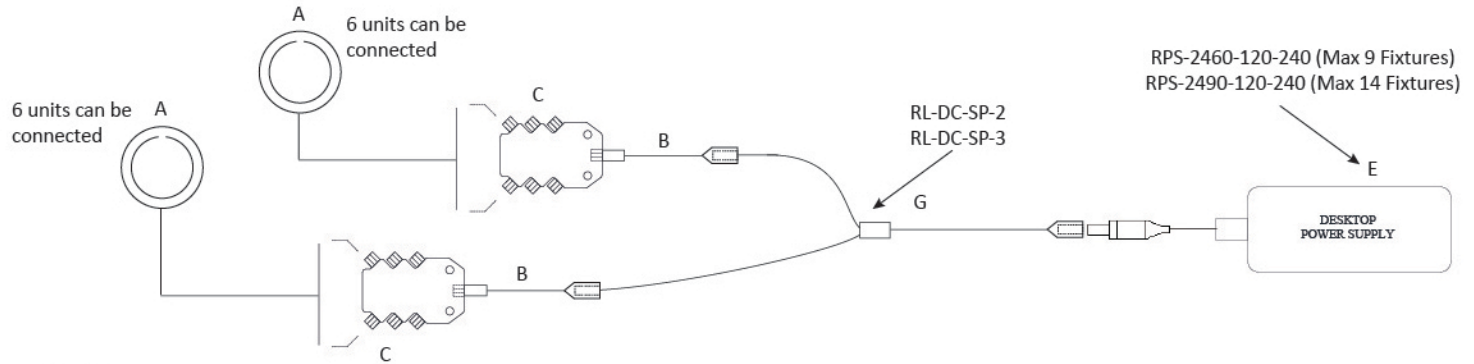

Hard-wired

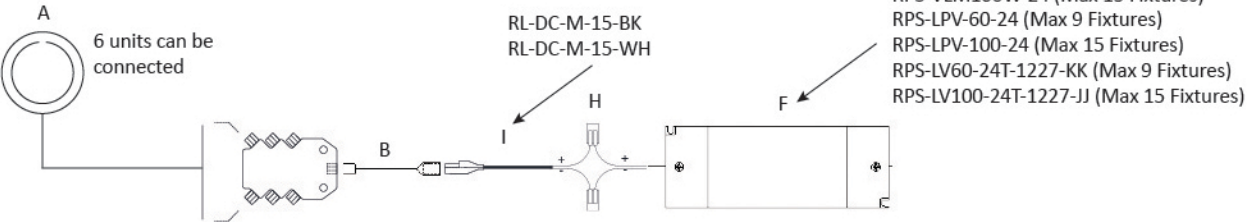

Alternate Hard-wired

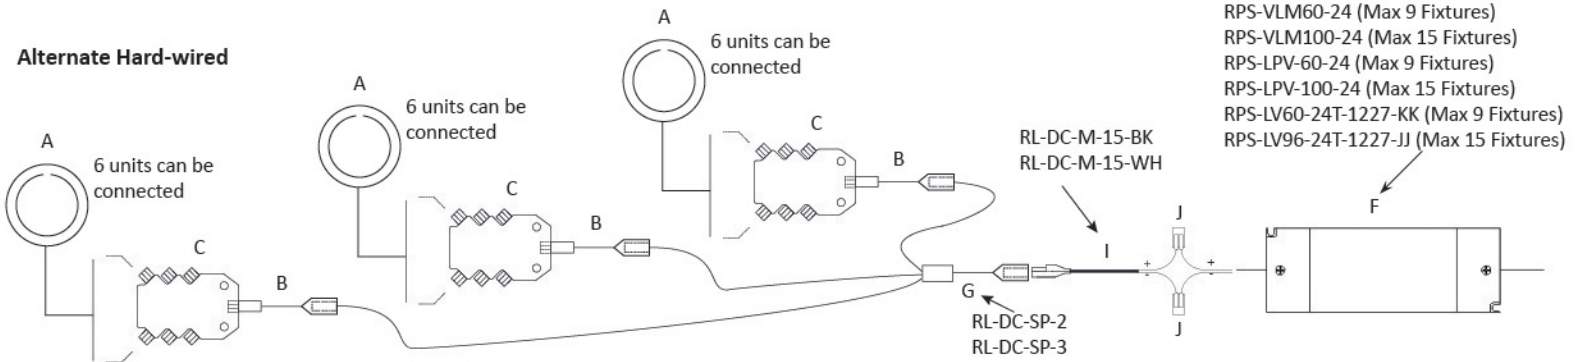

Max wiring distance between power supply and fixture is 20 feet (6m). Up to six fixtures can be wired to a single distribution box (CV-6SP-1224)

	length	Description		length	Description
A	Gimbal 2		F	RPS-VLM60W-24, RPS-VLM100W-24, RPS-LPV-100-24, RPS-LPV-60-24, RPS-LV60-24T-1227-KK, RPS-V96-24T-1227-JJ	Hardwire power supplies 60W / 96W / 100W
B	Adapter Cable CV-AD100-2-1224	4" (100mm) 4" Adapter harness for plug and play power supply	G	RL-DC-SP-2, RL-DC-SP3	15" (380mm) DC barrel connector double / triple splitter Black / White
C	CV-6SP-1224	Constant voltage splitter box 6 port	H	DL-PS-222-412	Wire clamps
E	RPS-2460-120-240 RPS-2490-120-240	PLUG & PLAY Power supplies 60W / 90W	I	RL-DC-M-15-BK RL-DC-M-15-WH	15" DC Plug male