


Type	
Project	
Catalog No.	

**IMAGE**

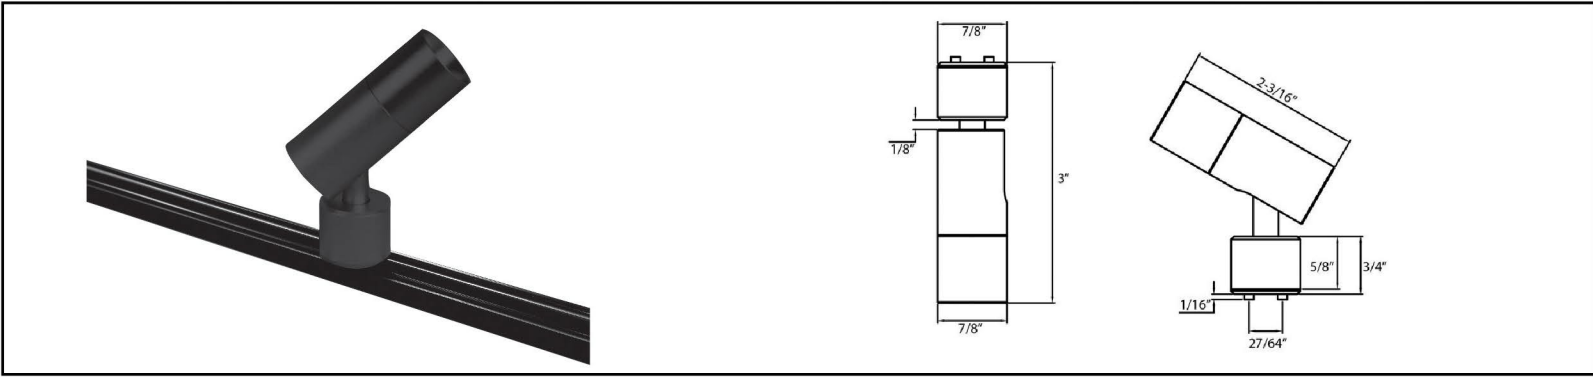

Fixture	Finish	Color	Optics	LED	Input	Power	CCT	CRI	General
Lazer 7	Anodized Aluminum / Painted	Silver / Black / White	20° / 30° / 40° Fixed	High Power LED 1 Pc	24VDC Constant Voltage	3W	3000 / 4000K	90+	Wireless & Magnetic detachable design; Nonpolarity

**DESCRIPTION**

Revlite's new Intelli-Trak-2 has evolved from its older sibling to become a finer, smaller more versatile power system for display lighting fixtures. The I-Trak 2 system is now narrower, lower profile and yet able to power and hold larger fixtures. I-Trak 2 can be concealed and embedded in lower profile millwork in either the horizontal or vertical orientation. All track fixtures are instantly removeable and repositionable due to its ingenious magnetic powered track mounts with polarity correction built in. No need to check polarity prior to repositioning.


**APPLICATIONS**

- Restaurant and Bar Shelving, Wine and Liquor Displays
- Case Lighting for Glassware and Bookcases
- Museum, Gallery and Art Exhibits
- Store Fixture Shelving and POS Stations
- Product Displays for Retail, Commercial and Work Environments
- Under Countertop Displays in Retail and Hospitality Environments


**FEATURES**

- Under Cabinet, under shelf mount or inside cabinet mounting
- Ingenious magnetic fixing and live power mounting with instant polarity correction
- 70 delivered lumens /Watt
- 3 step MacAdam illumination
- CRI of 90+
- Beam angles of 20°, 30° and 40°
- 360° horizontal adjustable aim.

**SPECIFICATIONS**


Input Voltage	24V DC
Wattage	3W
Color Temperature	3000K, 4000K
Lumen Output	200 lm
CRI	90+
Beam Angel	20°, 30°, 40°
Efficacy	70 lm/W
Finish	Black, Silver, White
Environment	UL Listed for Dry Location (Indoor only)
Certification	

**PHOTOMETRIC DATA**

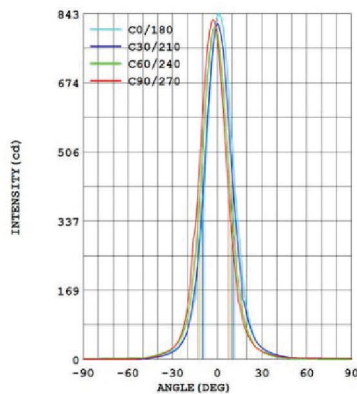

- \* Product specifications subject to change without notice.
- \* Note: To reduce risk of fire, do not install in a compartment smaller than 450 cubic/inches per 14.5W max.

**ORDERING INSTRUCTIONS**

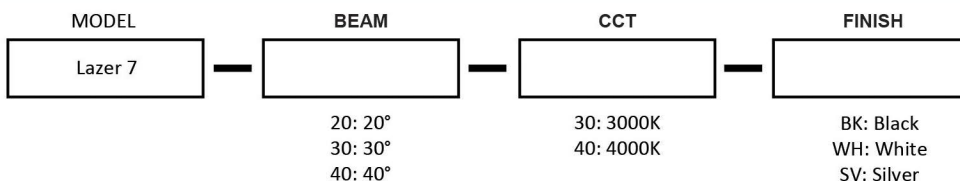

- Note:
- Should be used with I-Trak-2 magnetic track.
  - Sold separately.
  - Review I-Trak-2 spec sheet for more details