


Type	
Project	
Catalog No.	

IMAGE

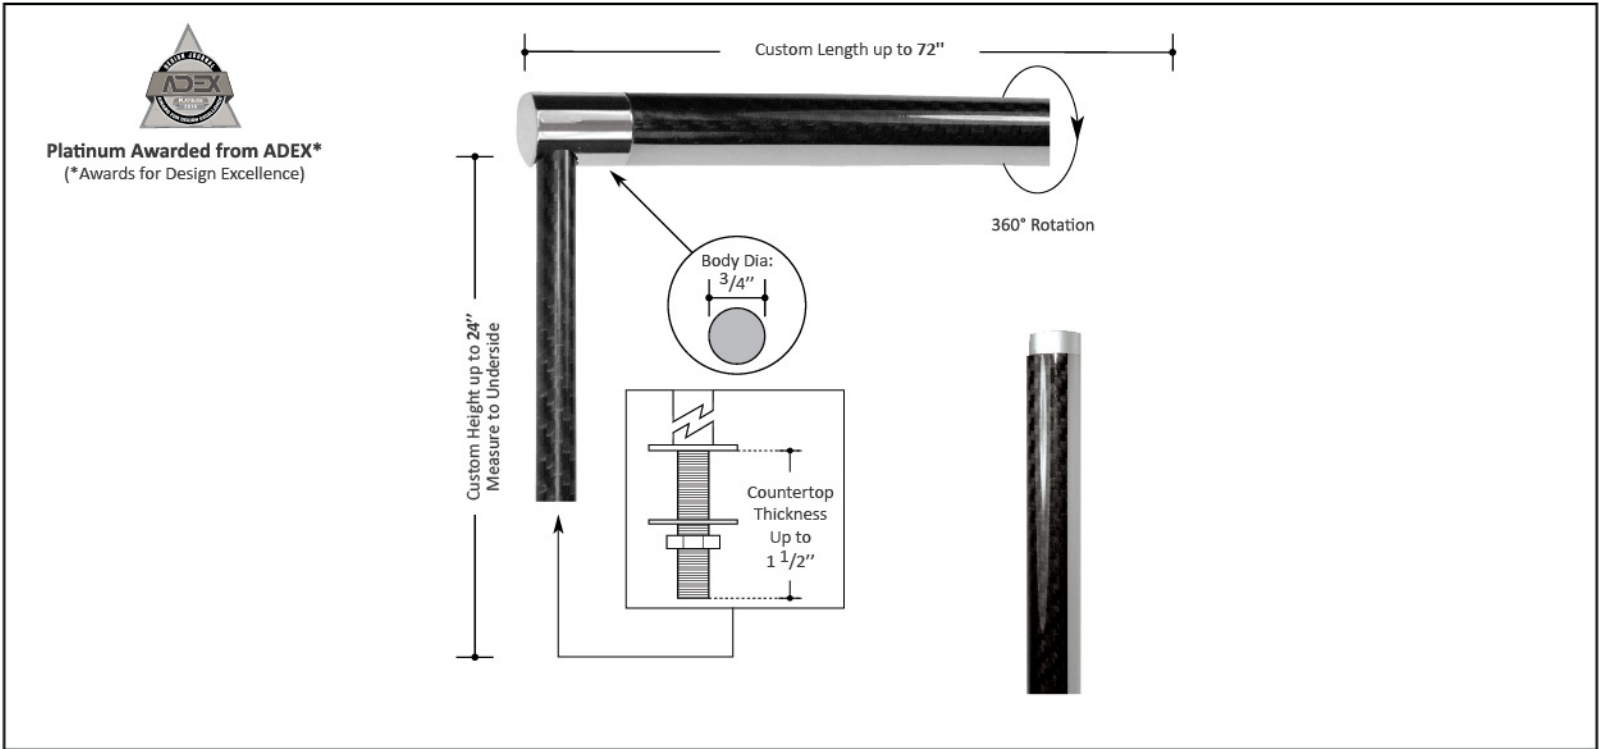

DESCRIPTION

The Luna Classic over the years since its introduction has remained a favorite of many high-end showcase designers. What could be better than to enhance the visual appeal of this versatile showcase fixture but to give it the ultimate finish. The finish that many high end high tech products are being made with today—Carbon Fiber. This is the real deal, the material that aircraft and Formula One cars are made from. This is not some artificial wrap of “Carbon-Look” material. Photographs do not do the finish justice. It must be viewed under proper lighting to demonstrate its Three-Dimensional features to the fullest.

Each Luna fixture is moulded from high tech composites using 3K Carbon in a Twill pattern to bring out its high tech look to the maximum.

The tubular support poles are also manufactured in 100% solid 3K Carbon Twill from a Pre-impregnated Carbon-resin fabric and hand laid up in a mold and autoclaved to perfection just like a Formula One race car chassis. Ask your Revlite representative to see this amazing finish.

All Luna Classic features are retained with this finish. This finish can be ordered on Luna Vertical and the Luna PFL as well. The only changes are that the maximum length is limited to 72” and the support pole height is a maximum of 24”. Please specify the end cap and hardware colors.

APPLICATIONS

- Showcase Lighting
- Exhibit Lighting
- Retail Displays

FEATURES

- 90° beam angle with soft light optics with no visible hotspots.
- Slim 3/4” (19mm) heat sink body.
- Light source: High Density High CRI LEDs (2700K, 3000K, 3500K, 4000K, 5000K).
- Simple 24VDC power input: no constant current. Fixture may be daisy chained to other fixtures on the same power supply.
- Ordered customized to your design lengths up to a maximum of 120” (lengths 60” or beyond require a center support). When ordering please use a Revlite shop drawing order template.
- Power consumption / Illumination options: 4W/Ft., 6W/Ft., 8W/Ft., 10W/Ft.
- Several mounting options available.
- Custom finishes available.
- cULus Listed.

COMPONENTS

- Power Supplies** 24V PP / 24V HW
- Accessories** LED
- Controls** DIM

Type	
Project	
Catalog No.	


SPECIFICATIONS*

Input Voltage	24 VDC
Wattage	4W/Ft; 6W/Ft; 8W/Ft; 10W/Ft
Colour Temp	2700K / 3000K / 3500K / 4000K / 5000K
Dimming	Optional
Lumen Output	100 Lm/W**
CRI	>90
Beam Angle	90°
Power Factor	0.9
Lamp Life	50,000 hours
Environment	IP20
Certification	cULus
Warranty	5 years - see published warranty terms for details

* Product specifications subject to change without notice.
 **Lumen data based on 4000K.

Luna Fixture with Stems


ORDERING INSTRUCTIONS

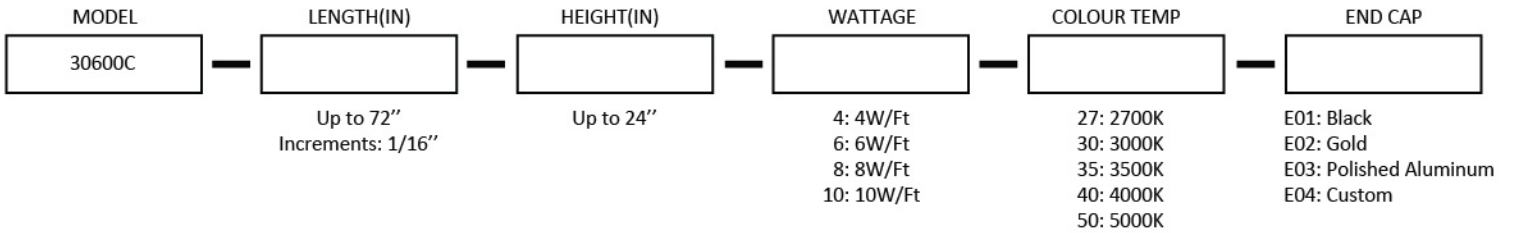

Example: 30600C-24-8-4-40-E01 = 30600C, length 24 inches, height 8 inches, 4W/ft, 4000K, black end cap

Luna Fixture without Stems

ORDERING INSTRUCTIONS

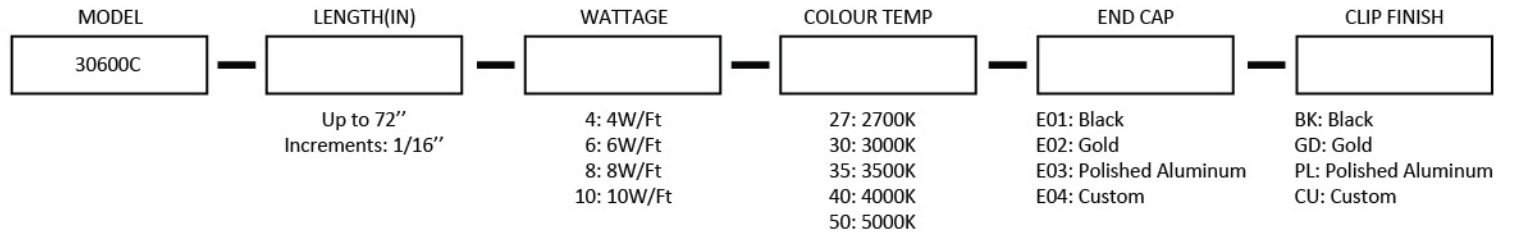

Example: 30600C-24-4-40-E01-BK = 30600C, length 24 inches, 4W/ft, 4000K, black end cap, black clip finish