
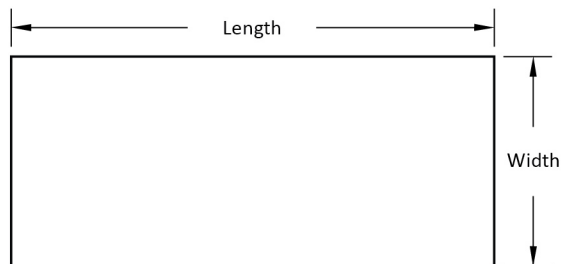


## IMAGE & SIZE

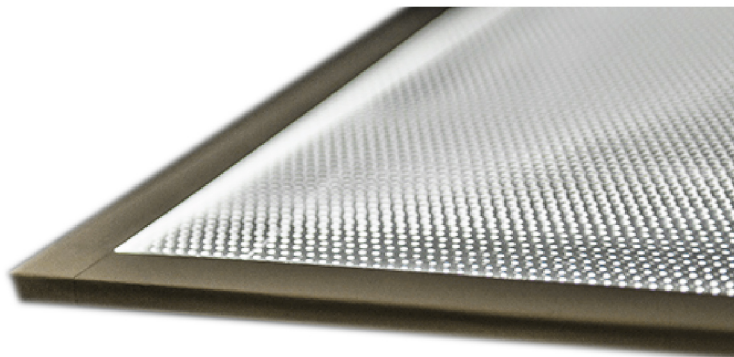

Available in virtually unlimited length and width.

## DESCRIPTION

The Snap Framed Light Panel System was designed for finished applications where the LED light panel would be visible and a finished profile is required.

## FEATURES

- Ultra-slim aluminum profile: starting at 1/4" (6mm), 9/16" (8mm)
- All aluminum frames may be powder coated
- Custom colors are available

## SPECIFICATIONS

Input Voltage	24V DC
Wattage	10W/Ft or 720lm/Ft
Colour Temp	2700K / 3000K / 4000K / 5000K
Lumen Output	670 lm/ft
CRI	>90
Beam Angle	60° / 90° / 160°
Power Factor	>0.9
Lamp Life	50,000 hours
Environment	IP20
Certification	cCSAus
Warranty	5 years - see published warranty terms for details

\* Product specifications subject to change without notice.

## ORDERING INSTRUCTIONS

MODEL	THICKNESS	WIDTH (IN)	LENGTH (IN)	COLOUR TEMP	FINISH	LENS
RLP-SF						
	6: 6mm 8: 8mm 10: 10mm	Up to 48"	Up to 96"	27: 2700K 30: 3000K 40: 4000K 50: 5000K	BK: Black SL: Silver WH: White	OP: Opaque WH: White

Example: RLP-SF-6-30-40-30-BK-OP = RLP-SF, thickness as 6mm, width as 30 inches, length as 40 inches, 3000K, black finish, opaque lens