


B8900M-HA

NEW

8.9kWh High-voltage Battery Module

- Enhanced Larger Capacity
- Battery Parallel Function

- Battery parallel function, up to 6 clusters per inverter
- Stackable integrated design, plug & play, no additional cable
- Up to 52A charge & discharge(continuous), faster than you've ever expected
- Fearlessly defying extreme temperatures, operating temperature -20°C~ 60°C
- Automotive-Grade AFE chip, experience ultra accuracy for optimal system performance
- Top-tier Safety, 5-layer Battery Protection :
 - ①Full coverage temperature detection
 - ②BMS intelligent control, over-temp., over-current, over-voltage protection
 - ③Built-in DC breaker
 - ④Internal aerosol fire extinguisher
 - ⑤Decompression valve

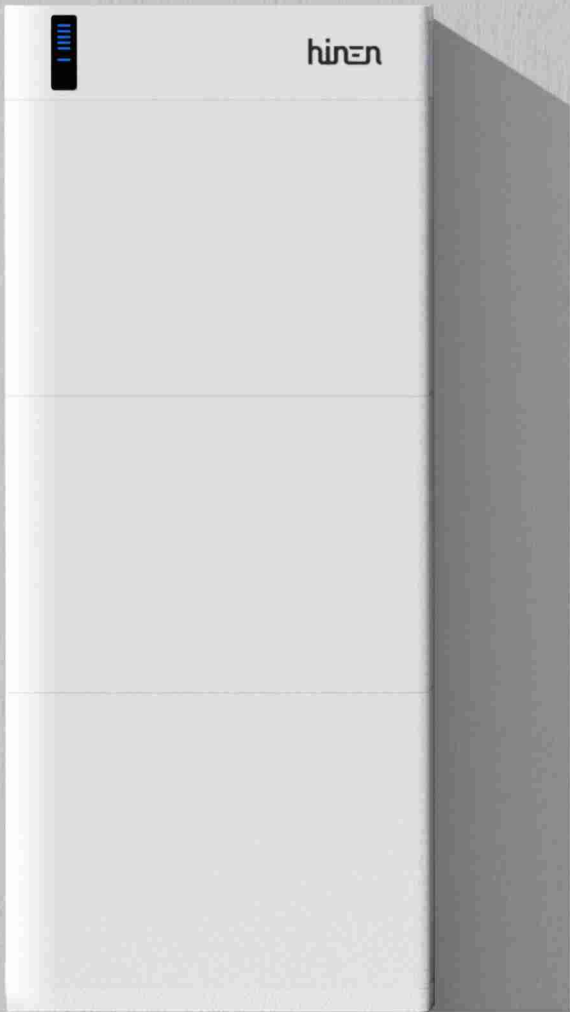

Technical Specification

Model	B8900M-HA	B8900M-HB	B8900M-HC
			
Product name	Rechargeable Li-ion Battery System		
Number of battery modules	1 module	2 module	3 module
BMS control unit model	B8900M-HP		
System Data			
Rated capacity *(Kwh)	8.985	17.971	26.956
Depth of Discharge (DOD)	90%		
Available energy*(KWh)	8.087	16.173	24.260
Battery module	172.8V,52Ah,8.985KWh		
Capacity expansion	1~3 modules connected per cluster,with up to 6 clusters connected in parallel		
Cell type	LFP(LIFEPO4)		
Cycle life*	8000 cycles		
Battery configuration	54S1P	108S1P	162S1P
Rated voltage(VDC)	172.8	345.6	518.4
Operating voltage(VDC)	135~194.4	270~388.8	405~583.2
Maximum charge/ discharge current*	52A		
Maximum charge/ discharge power*(KWh)	8.985	17.971	26.956
Operating temperature	Charge:0~55℃ / Discharge:-20~60℃		
Storage temperature and SOC	-10~35℃ @SOC60%		
Running logs	4G-Byte		
Protection			
Overvoltage/ Undervoltage protection	Yes		
Overcurrent protection	Yes		

Technical Specification

Model	B8900M-HA		B8900M-HB	B8900M-HC
				
Overtemperature/under-temperature protection	Yes			
DC circuit breaker	Yes			
Shutdown current	Yes			
General Data				
Communication	CAN			
Humidity	15% to 90% no condensing			
Operating Altitude	≤2000m			
IP rating	IP65			
Cooling method	Natural convection			
Weight(KG)	101	185	269	
Dimensions (without foot pad)(mm)	730*710*180	730*1220*180	730*1730*180	
Dimensions (with foot pad)(mm)	730*754*180	730*1264*180	730*1774*180	
Installation location	Indoor			
Installation method	Floor stand			
Certification	CB, CE, UKCA, LOA, SONCAR, RCM, EMC, ROHS, S-Mark,KBIA, UL			
	IEC 62619:2022, IEC 60730-1 Appendix H,IEC/EN 62368-1, EN IEC61000-6-1/3, IEC 60529, IEC 60068-2-52			
	UN 38.3, MSDS			
Warranty*	10 years Warranty,10 Years Performance Life			
Country of manufacture	Made in China			

Rated capacity *: Test conditions: 100% DOD, 0.5C charge and discharge at +25±2°C.
Available energy*: Test conditions: 90% DOD, 0.5C charge and discharge at +25±2°C.
Cycle life*: Test conditions: 90% DOD, 0.2C charge and 0.5C discharge at +25±2°C.
Maximum Charge and Discharge Current*/Power *: Maximum continuous charge and discharge current and power derating will be temperature and SOC dependent.
Warranty* : Refer to the product warranty terms for details.