

JAPAN QUARTZ CHRONOGRAPH WITH 10 MINUTES RETROGRADE AND DATE


AVI-8

SETTING THE TIME

1. Pull the crown out to the 2nd position when the second hand is at the 12 o'clock position.
2. Turn the crown clockwise to set the hour, minute and 24-hour hands to set the time. When the hour hand move, the 24-hour hand will move correspondingly.
3. Push the crown back to the normal position.


SETTING THE DATE

1. Pull the crown out to the 1st position.
2. Turn the crown counter-clockwise to set the date.
*Do not set the date and day of the week between 10:00PM and 1:00AM.
3. Push the crown back to the normal position.

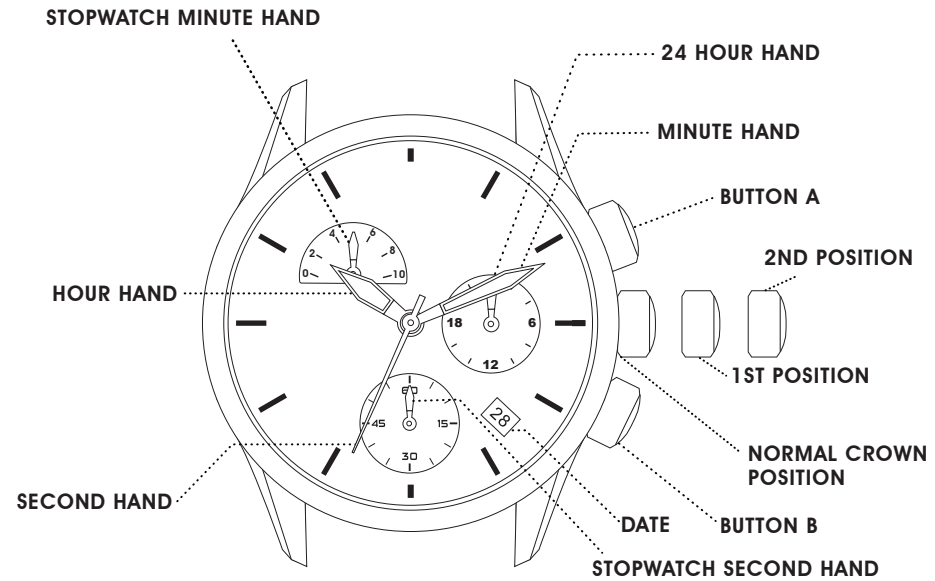

AVI-8

HOW TO USE STOPWATCH

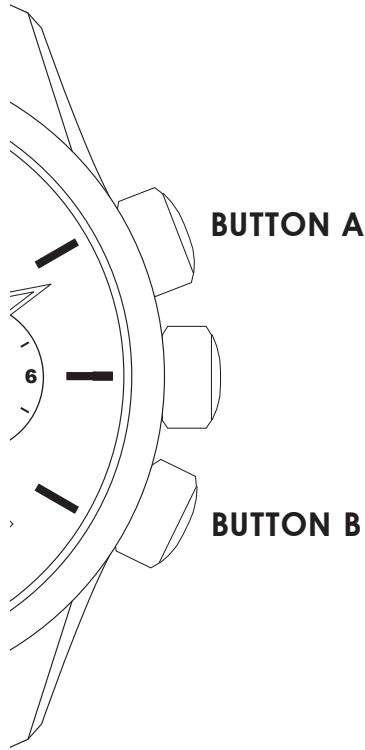


The stopwatch can measure up to 9'59" in one-second increments.

1) Standard Measurement




2) Accumulated elapsed time Measurement

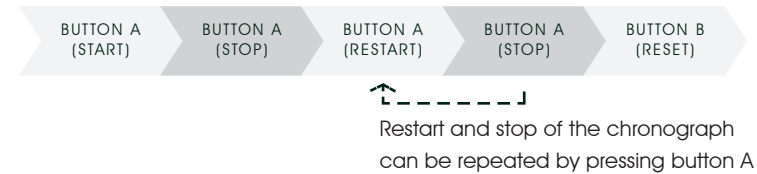

3) Split Time Measurement



4) Measurement of Two competitors



AVI-8

STOPWATCH HAND POSITION ADJUSTMENT

If the stopwatch hands are not in the "0" position, follow the procedures below to set them.

1. Pull the crown out to the 2nd position.

- When the stopwatch is measuring, if the crown is pulled out to the 2nd position, it will be automatically reset.

2. Press the button A or B to set the stopwatch hands to the "0" position.

The movements of the stopwatch minute hand and the stopwatch second hand are interlocked. To set the stopwatch minute hand to the "0" position, continue to move the stopwatch second hand until the stopwatch minute hand reaches the "0" position.

- The stopwatch hands move quickly if the button A or B is kept pressed.

3. Push the crown back to the normal position.