TORCHSTAR® OUTDOOR WALL LIGHTS TORCHSTAR BARREL™ 12" OUTDOOR WALL SCONCE W/ E26 SOCKET

ST9WLLO-RBSE26N-BLK









WARRANTY & RATING





SPECIFICATIONS

• Wattage: 40W max Voltage: 120V 60Hz • Luminous Flux: N/A

Beam Angle: N/A

Color Rendering Index (CRI): N/A

Lifespan: N/A

• Light Source: A19 bulb (E26 base).

Color Temperature (CCT): N/A

• Waterproof Rating: IP54

• Operating Temperature: -20°C to 40°C (-4°F to

104°F)

· Material: Aluminum

PRODUCT DESCRIPTION

Our cylindrical modern-style wall sconce is ideal for installation under eaves, effectively illuminating both the upper eave and the wall below to enhance visual appeal. Its up-and-down lighting design creates a visual elongation effect, making it suitable for courtyard walls, gables, and porches. Designed as 'lamp ready,' the fixture allows for easy installation of replaceable light sources, facilitating straightforward maintenance without the need to replace the entire unit.

FEATURES & BENEFITS

- · Certified by ETL, ensuring safety and compliance.
- Emits light upwards and downwards, providing indirect illumination suitable for wall washing.
- Large-scale design, perfect for expansive wall
- · lamp ready, allowing you to pair it with bulbs of your choice.
- Compatible with standard US 4-inch J-BOX for easy installation.



TORCHSTAR® OUTDOOR WALL LIGHTS **▼ TORCH**STAR BARREL™ 12" OUTDOOR WALL SCONCE W/ E26 SOCKET

ST9WLLO-RBSE26N-BLK

POWER AND ELECTRICAL FEATURES

- The product is ETL certified, features a UL Listed E26 socket, and operates at a voltage of 120V 60Hz. It is recommended to use an A19 bulb with an E26 base for optimal performance.
- The wiring material consists of 302°F (150°C) hightemperature Teflon-coated tinned copper. The wires are 18-gauge (AWG), UL and CSA certified to withstand temperatures up to 302°F (150°C) and 600 volts. They are available in black and white, measuring approximately 13.78 inches in length.

DESIGN AND STRUCTURE

- Minimalist cylindrical lamp with a matte black aluminum body, designed for durability and corrosion resistance, perfect for modern industrial style exteriors.
- Ultra-deep reflector cups design concentrates the light while preventing side leakage from the fixture.
- Lamp ready design offers longer lifespan than integrated LED units, allowing bulb replacement without discarding the entire fixture.

ADDITIONAL COMPONENTS


- · Crossbar mounting bracket kit
- Mounting screws
- · Orange wire nuts

LED AND OPTICAL PERFORMANCE

 The light fixture is equipped with an E26 socket for screw-in bulbs, but does not include the light source. It is recommended to use an A19 bulb for optimal performance.

PRODUCT DIAGRAM

170mm[6.69inch]

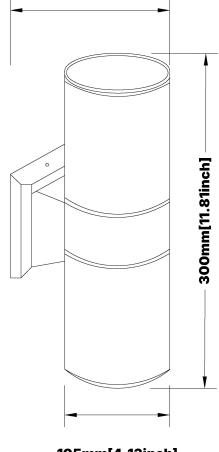

105mm[4.13inch]

Size in mm 1" = 25.4mm.