



Jack Wechat



Jack Sewing Machine Co.,LTD.

JACK SEWING MACHINE CO.,LTD.

No. 15 South Airport Road, Jiaojiang District, Taizhou, Zhejiang, PRC
TEL: 0086-576-88177787 88177757
FAX: 0086-576-88177787

E-mail: sales@chinajack.com
www.chinajack.com

JACK

China No.1

Shanghai stock
listed

“Make the service smarter
Guide the industry future”





ABOUT JACK

Jack Sewing Machine Co., Ltd. was founded in August 2003, sewing machine industry originated in July 1995. Jack is an international high-tech enterprise which focusing on industrial sewing machinery research and development, production and marketing. After years of management and development, the company has become a leading scale of industrial sewing machine manufacturer and one of the largest production and sales enterprises, especially have absolute pioneering advantage in the lockstitch, overlock and interlock sewing machines. On 19 January 2017, Jack has successfully listed on the main board of the Shanghai Stock Exchange (Name as "Jack stock", stock code: 603337).

Since the establishment, Jack has regarded technology research and development as the core driving force for development. As early as 2006, the introduction of advanced IPD (integrated product development) concept, after years of exploration and practice, has formed a set of industry-leading technology research and development system. At the same time, as the "national enterprise technology center", Jack has formed the industry's largest R & D team, strong talent reserve promoted the innovation and development of enterprises. At present JACK declares to be the largest number of invention patents company in world's sewing industry with over 800 patents in consecutive 4 years.

CHINA NO.1

JACK vigorously promotes the integration of the two innovation, and enhance the ability to respond to the market changes quickly. With the corporate mission: provide the best sewing machinery with optimum cost-performance ratio to all, and the corporate spirit: harmony, honesty, struggling, rise, JACK keeping pace with the times, developing and innovating to follow up a new round of global industrial revolution, to build the "WISDOM FACTORY" with wisdom data, intelligent manufacturing and intelligence services, therefore making unremitting efforts to create "The NO.1 Sewing Machine Brand all Over the World".

JACK have got great achievement such as:

NO.1 of Sewing Machine Industry in China Light Industry Comprehensive Evaluation;

No.1 of Export Sales for Consecutive Eight Years;

No.1 Sales in Quantity in Sewing Machine Field all Around the World.

JACK is worthy the title of "China No.1"

MAKE CUSTOMER HAPPY



ZARA

BOSS
HUGO BOSS

UNI
QLO

Semir
森馬

ETERNA

Bolton Barclay

Metersbonwe
美特斯·邦威

波司登
BOSIDENG

adidas

NIKE

PUMA

LI-NING

PEAK

HLA
海澜之家

浪莎
Langsha

报喜鸟
SAINT ANGELO

JUDGER
佳吉

南极人
NANJIREN

PEACBIRD
太平鸟集团

UOLAI
优莱

罗兰家纺

Amer
爱慕

天堂伞业

FEIZI
非织

HUABAO
虎豹男装

EVER-GLORY

沛浪
PEILANG

大帝集团
MONNARCH GROUP

YISHION 以纯

FAPA
芬帕

千奇万
kikiwin

帝牌男装

Yeba
燕豹集团

宏达制衣

GBIQ
斯美泰包装

QIOZHANG
乔致王

洛兹集团

恒安集团
HENGAN

ASIA LINK GROUP, INC.
联亚集团有限公司

國人西服
GUOREN

QINMAN
琴曼

AOBENNI
傲本尼

GXG
GILL MIX GREEN

PERTER TEVERE
派登服饰

JODOLL
乔顿服饰


洁丽雅
grace

WONDERFUL JACK



STRONG R&D STRENGTH

7 R&D Centre
500 Members R&C Team
800 Patents, Leading the Industry

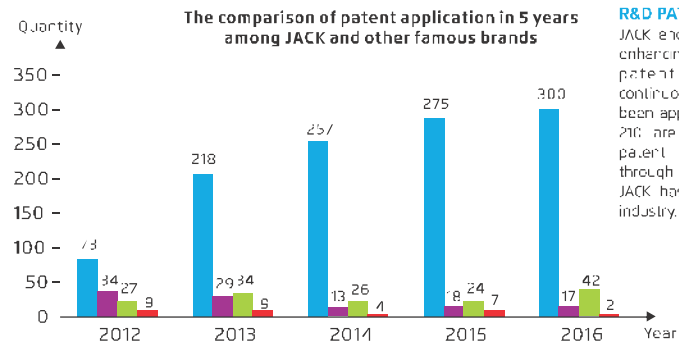

R&D PATENT

JACK encourages innovation and keeps enhancing creativity. From year 2012 the patent quantity has increased continuously, and 300 patents have been applied in year 2016, during which 210 are the innovation patents. The patent quality and technical breakthrough improved continuously. Now JACK has the most patents in sewing industry.

JACK HONOR



Zhejiang Quality Award



Zhejiang Manufacturing Certificate



Asian Design Award



Top 100 China Light Industry



Competitive Enterprises of National Intellectual Property




9000



14000



18000

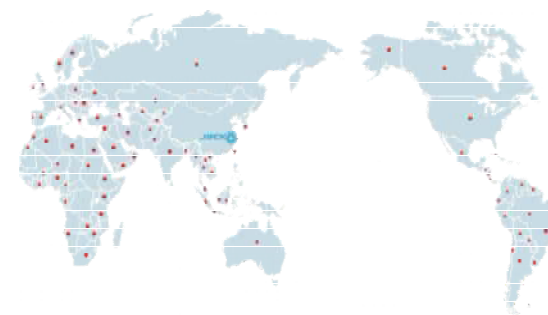

SALES NETWORK

JACK sales network located in more than 100 countries and has more than 5000 sales and service centre.





Supplier: ensure the quality and efficiency from the beginning.




Agent: ensure the service quality for end-user.



Apparel Industry: meet the commands and boost the industry upgrading.

SMART SERVICE

Build more than 5000 quick service centres in the future.

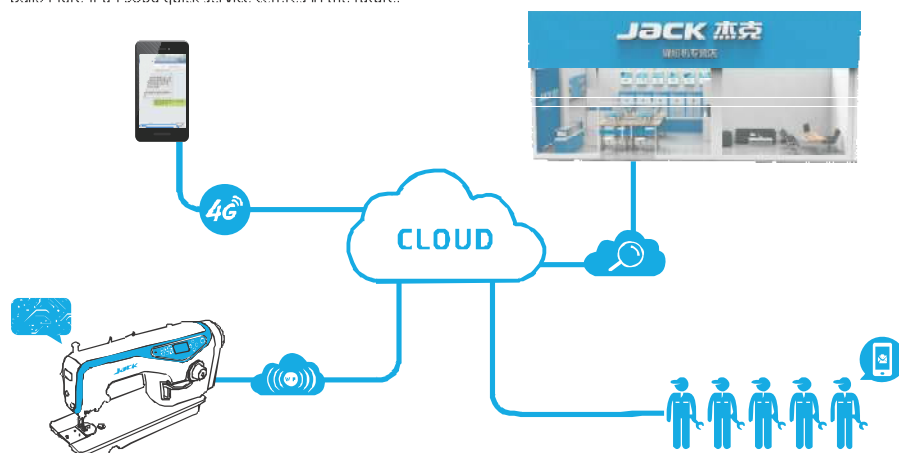

▼ ADVANCED EQUIPMENT: INTELLIGENT PRODUCING LINE

The first intelligent line finishing production by investing 100 million RMB, no need manpower, increase efficiency, improve the product accuracy and ensure the high-quality.



▼ JACK A-SHARE LISTED COMPANY



Successfully listed in Shanghai stock market

Product list

Lockstitch Machine Series

A6F Computerized Needle Feed Lockstitch Machine	03
A5 Thread Cleanness Computerized Lockstitch Machine	03
A4 Speaking Computerized Lockstitch Machine	04
A3 High Speed Computerized Lockstitch Machine	05
A2 Automatic Trimmer Lockstitch Machine	06
F4 Power Saving Lockstitch Machine	07
JK-58450J Computerized Double Needle Lockstitch Machine	08
JK-5559G Semi-dry Computerized Lockstitch Machine with Edge Cutter	09
JK-8558G Power Saving Chain Stitch Machine	10

Overlock Machine Series

C6 Super High Speed Automatic Overlock Machine with Pneumatic Suction Device	13
C5 High Speed Automatic Overlock Machine with Pneumatic Suction Device	14
C4 High Speed Automatic Overlock Machine	15
C3 High Speed Automatic Overlock Machine	16
E4 Super High Speed Power Saving Overlock Machine	17
JK-800D Power Saving Overlock Machine	18
JK-797DI/797TDI Small Cylinder bed Variable Top Feed Power Saving Overlock Machine	19
JK-798TE/798TDI Variable Top Feed Computerized Overlock Machine	20

Interlock Machine Series

K4-UT High Speed Computerized Cylinder-bed Interlock Machine	23
--	----

W4-UT High Speed Computerized Flat-bed Interlock Machine	24
JK-8670BDII-UT High Speed Computerized Small Cylinder-bed Interlock Machine	25
JK-8009VCDI Power Saving Multi-needle Machine	26

Special Machine Series

M80 Series Programmable Electronic Large-area Pattern Sewing Machine	29
JK-13020 Series Programmable Electronic Pattern Sewing Machine	30
JK-T5878-68B/78 Automatic Pocket Weltting Machine	31
JK-T5878-58BQ Automatic Placket Sewing Machine	32
JK-T1900G Electronic Bartacking Machine	33
JK-T1903GR Electronic Button Attaching Machine	34
JK-T1790E Electronic Lockstitch Buttonholing Machine	35
JK-T781E Integrated Electronic Lockstitch Buttonholing Machine	36
JK-I1377E Integrated Electronic Button Attaching Machine	37
JK-T9270D/9280D Direct Drive Feed-off-the Arm Machine	38

Heavy-duty Machine Series

JK-2060G Compound Feeding Computerized Lockstitch Machine for Heavy duty	41
JK-2030G Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty	42
JK-2001G Long Stitch Length Lockstitch Machine for Heavy-duty	43
JK-6380F Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty	44

Make the service smarter

Smart service is not only offering on-time after-sales service, but also helping operators to solve the problem with the intelligent human-computer interaction.



Lockstitch Machine Series



A6F

Computerized Needle Feed Lockstitch Machine
Full-automatic; Needle feed; No thread tail; Semi-dry



A5


Thread Cleanliness Computerized Lockstitch Machine
Full-automatic; No thread tail; Semi-dry



A4

Speaking Computerized Lockstitch Machine
Full-automatic; Speaking

A6F

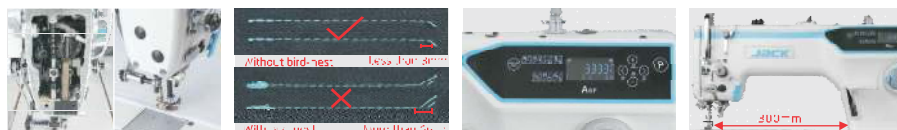

Needle feed; Avoid of layers offset

No thread tail

Touchable panel

Large space

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/Medium Heavy Duty	Volume (mm)	Weight (kg)
A6F	DBx11-18#	2	4.5	5-13	4000	✓	605x218x670	46/53
A6F-N	DBx11-18#	2	4.5	5-13	4000		605x218x670	46/53

Note: auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard. No less bird-nest device, pneumatic and electronic suction device are optional.

A5



Initial sewing without bird-nest; Short thread tail after trimming

Semi-dry

sealed oil pan

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/Medium Heavy Duty	Volume (mm)	Weight (kg)
A5	DBx11-18#	2	5	5-13	5000	✓	645x248x550	40/45
A5-N	DBx11-18#	2	5	5-13	5000	✓	645x248x550	40/45

Note: auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard. No less bird-nest device, pneumatic and electronic suction device are optional.



Speaking

Suitable for light and heavy material

Factory reset

Single shaft drive; Stable and fast


Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/Medium Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
A4-X	DB-11-18#	2	4	5-13	5000	✓		645x248x550	43/46
A4	DB-11-18#	2	4	5-13	5000	✓		645x248x550	43/46
A4-F	DPx5 IG-21#	2	5	5-13	3500		✓	645x218x550	40/46
A4-7	DBx11-18#	2	7	5-13	3500	✓		645x218x550	40/46
A4-F-7	DPx5 IG-21#	2	7	5-13	3500		✓	645x218x550	40/46

Note: auto thread trimming, auto reverse, auto presser foot lifter, electronic thread tension are equipped as standard.



A3

High Speed Computerized Lockstitch Machine
Auto-trimmer; Auto-reverse



Suitable for light and heavy material



Factory reset




Single shaft drive: Stable and fast



Cooling fan

Model	Needle	Head No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (S.P.M)	Light/ Med./air Heavy Duty	Heavy Duty	Volume (l/min)	Weight (kg)
A3	DBx11-18#	2	5	5-13	5000	✓		645x248x550	40/46
A3-II	DPx518-21#	2	5	5-13	3500		✓	645x248x550	40/46
A3-7	DBx11-18#	2	7	5-13	3500	✓		645x248x550	40/46
A3-H-7	DPx518-21#	2	7	5-13	3500		✓	645x248x550	40/46
A4-T	DBx11-18#	2	5	5-14	5000	✓		645x248x550	40/46
A4-H	DPx518-21#	2	5	5-13	3400		✓	645x248x550	40/46
A3-L-7	DBx11-18#	2	7	5-13	3500	✓		645x248x550	40/46
A3-LH-7	DPx518-21#	2	7	5-13	3500		✓	645x248x550	40/46

Note: auto thread trimming, auto reverse, and electronic thread tension are equipped as standard.

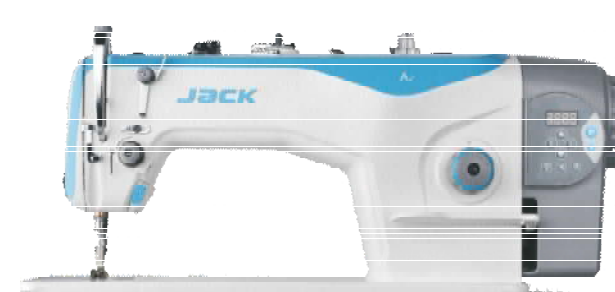

A2

Automatic Trimmer Lockstitch Machine
Auto-trimmer



Auto thread trimming



LED light



Cooling fan



Needle position

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (S.P.M)	Light/ Med./air Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
A2-C0	DBx11-18#	2	5	5-13	4000	✓		676x248x550	44/41
A2-CR0	DPx518-21#	2	5	5-13	4000		✓	676x248x550	44/41
A2-LQ-7	DBx11-18#	2	7	5-13	4000	✓		676x248x550	34/41
A2-LH-7	DPx518-21#	2	7	5-13	3500		✓	676x248x550	34/41

Note: auto thread trimming is equipped as standard.



F4

Power Saving Lockstitch Machine
Power saving



Power saving 20%


Convenient thread cutter

Needle position

LED light

Model	Needle	Thread No.	Stitch Length (mm)	Presser Foot Lifting Height (mm)	Max. Speed (S.P.M)	Light/Medium/Heavy Duty	Heavy Duty	Volume (mm)	Weight (kg)
F4	DBX111-10#	2	5	5-13	5000	✓		645×248×250	32/38.7
F4-L	DPX518-21#	2	5	5-13	3500		✓	645×248×250	32/38.7
F4-7	DBX111-10#	2	7	5-13	3500	✓		645×248×250	32/38.7
F4-L-7	DPX518-21#	2	7	5-13	3500		✓	645×248×250	32/38.7
F4-L-7-L	DPX518-21#	2	7	5-13	3500		✓	645×248×250	32/38.7

Note: L: Large Stock.

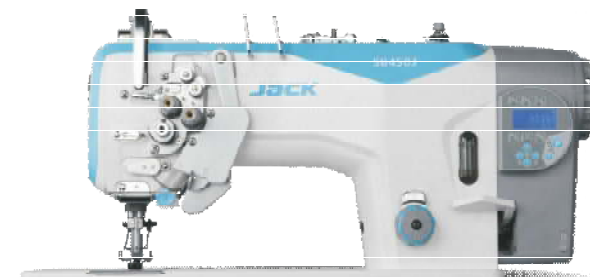

JK-58450J

Computerized Double Needle Lockstitch Machine
Straight cutter; Auto cornering; Large space



For different thickness of thread

Straight knife

Split needle bar

Built in presser foot lifter

Model	Needle	Stitch Length (mm)	Needle Gauge (mm)	Presser Foot Lifting Height (mm)	Max. Speed (S.P.M)	Application	Function	Auto Corner Sewing	Large Foot	Volume (mm)	Weight (kg)
JK-58420-003/JK-58420-003	DPX511-10#/TK-22#	4.5	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch			725×320×675	43/53.5
JK-58430-003/JK-58430-005	DPX511-16#/TK-22#	5	6.7	7-13	4000	Light/Heavy Duty	Corner Stitch			725×320×675	43/53.5
JK-58470-003/JK-58470-005	DPX511-16#/TK-22#	7	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch	✓	✓	725×320×675	44/54.5
JK-58750-003/JK-58750-005	DPX511-16#/TK-22#	7	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch		✓	725×320×675	43/53.5
JK-58420-403E/JK-58420-405E	DPX511-10#/TK-22#	4.5	6.7	7-13	3000	Light/Heavy Duty	Straight Stitch			725×320×675	53/63
JK-58430-403E/JK-58430-405E	DPX511-16#/TK-22#	5	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch			725×320×675	53/63
JK-58450J-113E/JK-58450J-115E	DPX511-16#/TK-22#	5	6.7	7-13	4000	Light/Heavy Duty	Corner Stitch	✓		725×320×675	53/63
JK-58470-403E/JK-58470-405E	DPX511-16#/TK-22#	7	6.4	7-13	3000	Light/Heavy Duty	Straight Stitch		✓	725×320×675	53/63
JK-58750-403E/JK-58750J-405E	DPX511-16#/TK-22#	7	6.4	7-13	3000	Light/Heavy Duty	Corner Stitch		✓	725×320×675	53/63
JK-58750-413E/JK-58750J-415E	DPX511-16#/TK-22#	7	6.7	7-13	3000	Light/Heavy Duty	Corner Stitch	✓	✓	725×320×675	53/63

Note: 1. F4 is computerized type: a. thread pinning; auto reverse; b. a presser foot lifter; auto thread winding are equipped as standard.
Electronic thread tension is optional. Straight stitch: 03/125; Corner stitch: 103/105/113/15.
2. Optional needle gauge: 1/3 (1.2), 5/32 (4.0), 3/16 (4.8), 1/4 (6.4), 5/16 (7.9), 3/8 (9.5), 7/16 (11.1), 1/2 (12.7), 5/8 (15.9), 3/4 (22.2), 1 (25.4).



JK-5559G


Semi-dry Computerized Lockstitch Machine with Edge Cutter
Semi-dry; Single shaft drive



Edge cutter and tape binner
(JK-5559G-T)



Semi-dry




Large speed



Single shaft drive; Stable and fast

Model	Needle	Thread No.	Stitch Length (mm)	Needle Gauge (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Light/ Medium/ Heavy Duty	Voltage (mm)	Weight (kg)
JK-5559G-A	DBx111-B#	2	5	3.2	5-13	4000	✓	5/5x248x550	40/45
JK-5559G-W	DBx111-B#	2	5	3.2	5-13	4000	✓	5/5x248x550	32/38/37
JK-5558G	DBx111-B#	2	5	3.2	5-13	4000	✓	5/5x248x550	32/38/37
JK-5558G-W	DBx111-B#	2	5	3.2	5-13	4000	✓	5/5x248x550	32/38/37
JK-5558G-L	DBx111-B#	2	5	3.2	5-13	4000	✓	5/5x248x550	32/38/37

Note: 1. JK-5559G-W is computerized, semi-dry, auto presser foot lift; electronic thread tension are equipped as standard.
2. JK-5559G is direct drive type.
3. W: daily thread; T: with fabric edge cutter and tape binner.

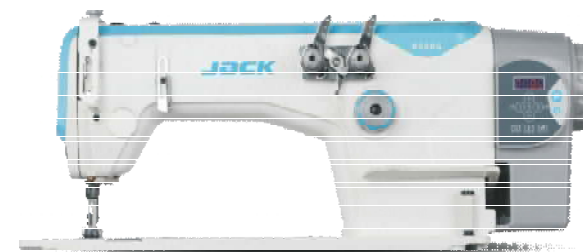

JK-8558G

Power Saving Chain Stitch Machine
Power saving



Semi-dry



Auto presser foot lift




Rear puller



Two needle gauges (JK-8558G)

Model	Needle Array	Needle Gauge	Needle	Needle No.	Thread No.	Needle Distance (mm)	Presser Foot Height (mm)	Light/ Medium/ Heavy Duty	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-8558G-WZ	Parallel Double Needle	1/8, 3/16, 1/8, 3/8	TVx7 14#	2	4	1.4-4	4.5 (knee control 8-10)	✓	✓	1000	675x275x595 39/47
JK-8558G-WZ	Single Needle	-	TVx7 14#	1	2	1.4-4	4.5 (knee control 8-10)	✓	✓	4000	675x275x595 39/47
JK-8558G-2WZ	Vertical Double Needle	3/16	TVx7 14#	2	4	1.4-4	4.5 (knee control 8-10)	✓	✓	4000	675x275x595 39/47
JK-8558G-WZ	Silent Three Needle	1/8	TVx7 14#	3	6	1.4-4	4.5 (knee control 8-10)	✓	✓	4000	675x275x595 39/47
JK-8558G-WZ-PL	Silent Three Needle	1/8	TVx7 14#	3	6	1.4-4	4.5 (knee control 8-10)	✓	✓	4000	675x275x595 39/47
JK-8558G-F4W7	Triple Three Needle	1/8	TVx7 14#	3	6	1.4-4	4.5 (knee control 8-10)	✓	✓	4000	675x275x595 39/47

Note: PL: rear puller; JK-8558G/8558G-C: auto presser foot lift; is optional, the parameter of JK-8558WD/8558CWD is the same with JK-8558G/8558G-C.



Make the service smarter


Smart service is not only trouble shooting
but also preventing the problems happening
by the intelligent pre-warning system.

Overlock Machine Series



C6


Super High Speed Automatic Overlock Machine with Pneumatic Suction Device
Full-automatic; Pneumatic device; Oil proof and durable



High efficiency Clean sewing Oil-free Touchable panel

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (rpm)	Volume (l/min)	Weight (kg)
C6-02-250	Pocket Binding Seaming	DCx2714#	2	4	5	5	3.0	0.7-2	3.5	7400	582x360x610	35/48
C6-02/233/KS	Plain Seaming	DCx2714#	1	3	-	4	3.0	0.7-2	5	7400	582x360x610	35/48
C6-412/333/KS	Bottom Finishing	DCx2714#	1	3	-	4	3.8	0.7-2	5	7500	582x360x610	35/48
C6-412/222/KS	Narrow Stitch Seaming	DCx2714#	1	3	-	1.5	3.8	0.7-2	5	7500	582x360x610	35/48
C6-MJ-3-02/213	Non-synchronous Material	DCx2714#	1	4	-	4	3.8	-	5	7000	582x360x610	35/48
C6-4-M03/333/KS	Hair Seaming	DCx2714#	2	4	2	4	7.6	0.7-2	5	7500	582x360x610	35/48
C6-4-M03/333/H/M/KS	Heavy Duty	DCx2714#	2	4	2	4	7.6	0.7-2	6.5	7500	582x360x610	35/48
C6-MJ-1-53/233	Towel Ending	DCx2714#	2	4	2	4	3.8	0.7-2	5.5	7500	582x360x610	35/48
C6-5-53/233	Strip Attach Seaming	DCx2714#	2	5	3	4	3.0	0.7-2	5.5	7400	582x360x610	35/48
C6-5-03/233/KH	5-5 Stitch	DCx2714#	2	5	5	5	3.0	0.7-2	5	7400	582x360x610	35/48
C6-5-03/333/KH	3-4 Stitch	DCx2714#	2	5	3	4	3.0	0.7-2	5	7400	582x360x610	35/48
C6-5-A04/433	Extra Heavy Duty	DCx2715#	2	5	5	5	5	0.8-1.5	7	7500	582x360x610	35/48
C6-6-03/443/KH	Plain Seaming	DCx2714#	3	6	3-2	4	3.8	0.7-2	5	7500	582x360x610	35/48

Note: KS: vertical suction device; KH: horizontal suction device, other devices are pneumatic type; H/M: suitable for heavy and light material; P: rear pulser (optional); W: dry hood (optional).

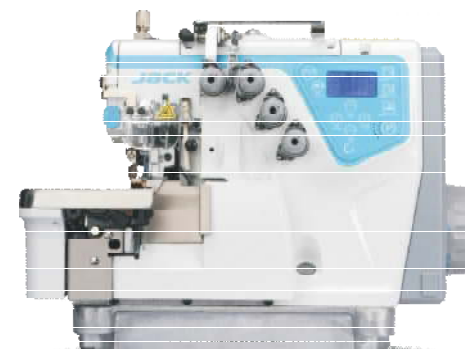

C5


High Speed Automatic Overlock Machine with Pneumatic Suction Device
Full-automatic; Pneumatic device; Oil proof



Super short thread tail Clean sewing Voice guide; One key to reset Intelligent recognition of fabric thickness


Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (rpm)	Volume (l/min)	Weight (kg)
C5-02-250	Pocket Binding Seaming	DCx2714#	2	4	5	5	3.0	0.7-2	3.5	7000	582x360x610	44/44
C5-02/233/KS	Plain Seaming	DCx2714#	1	3	-	4	3.0	0.7-2	5	7000	582x360x610	33/41
C5-03/233/KS	Bottom Finishing	DCx2714#	1	3	-	4	3.8	0.7-2	5	7000	582x360x610	33/41
C5-3-02/233/KS	Narrow Stitch Seaming	DCx2714#	1	3	-	1.5	3.8	0.7-2	5	7000	582x360x610	33/41
C5-WF-4-02/213	Non-synchronous Material	DCx2714#	1	3	-	4	3.8	-	5	7000	582x360x610	33/41
C5-4-M03/333/KS	Hair Seaming	DCx2714#	2	4	2	4	4.6	0.7-2	5.5	7000	582x360x610	33/41
C5-4-M03/333/H/M/KS	Heavy Duty	DCx2714#	2	4	2	4	4.6	0.7-2	6	7000	582x360x610	33/41
C5-MJ-1-53/233	Towel Ending	DCx2714#	2	4	2	4	3.8	0.7-2	5	7000	582x360x610	33/41
C5-5-33/233	Strip Attach Seaming	DCx2714#	2	5	3	4	3.0	0.7-2	5	7000	582x360x610	44/44
C5-5-03/233/KH	5-5 Stitch	DCx2714#	2	5	5	5	3.0	0.7-2	5	7000	582x360x610	44/44
C5-5-03/333/KH	3-4 Stitch	DCx2714#	2	5	3	4	3.0	0.7-2	5	7000	582x360x610	33/41
C5-5-A04/433	Extra Heavy Duty	DCx2715#	2	5	5	5	5	0.8-1.5	7	7000	582x360x610	33/41
C5-6-03/333/KH	Plain Seaming	DCx2714#	3	6	3x2	4	3.8	0.7-2	5	7000	582x360x610	33/41

Note: KS: vertical suction device; KH: horizontal suction device, other devices are pneumatic type; H/M: suitable for heavy and light material

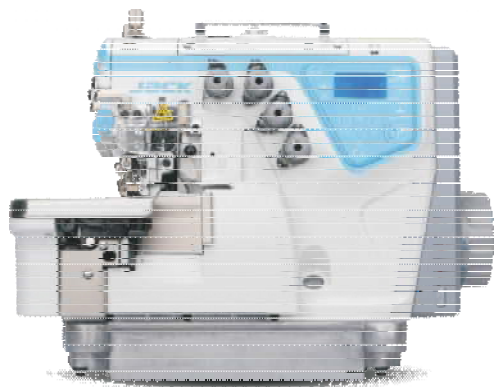

C4

High Speed Automatic Overlock Machine
Full-automatic; Electronic device; Oil-proof; Voice guide




High efficiency



Intelligent recognition of fabric thickness



Voice guide; One key to reset



Available to narrow and wide edge

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (SPM)	Volume (mm)	Weight (kg)
C4-02/250	Pocket Binding Seaming	DCx27 1#	2	4	5	5	3.0	0.7-2	3.5	7000	525*350*510	33/41
C4-02/253	Plain Seaming	DCx27 1#	1	3	-	4	3.0	0.7-2	5	7000	525*350*510	33/41
C4-31/234	Beautif Hemming	DCx27 1#	1	3	-	4	3.8	0.7-2	5	7000	525*350*510	33/41
C4-42/234	Narrow Side Seaming	DCx27 SP	1	3	-	5	4.8	0.7-2	5	7000	525*350*510	33/41
C4-43/234	Non-uniform Fabric	DCx27 1#	1	4	-	4	8.5	-	5	7000	525*350*510	33/41
C4-1-M03/333	Half Seaming	DCx27 1#	2	4	2	4	4.6	0.7-2	5.5	7000	525*350*510	33/41
C4-1-M03/333/H/M	Heavy Duty	DCx27 1#	2	4	2	4	4.6	0.7-2	6	7000	525*350*510	33/41
C4-1-M03/333/AD	Adjustable Side Stitch Width	DCx27 1#	2	4	2	4	4.6	0.7-2	5.5	7000	525*350*510	33/41
C4-WU-4-53/233	Towel Ending	DCx27 1#	2	4	2	4	3.0	0.7-2	5	7000	525*350*510	33/41
C4-5-53/233	Strip Attach Seaming	DCx27 1#	2	5	3	4	3.0	0.7-2	5	7000	525*350*510	33/41
C4-5-03/233	5x2 Stitch	DCx27 1#	2	5	5	5	3.0	0.7-2	5	7000	525*350*510	33/41
C4-5-03/333	3x4 Stitch	DCx27 1#	2	5	3	4	3.8	0.7-2	5	7000	525*350*510	33/41
C4-5-A04/445	Extra Heavy Duty	DCx27 1#	2	5	5	6	3	0.7-2	7	7000	525*350*510	33/41
C4-5-03/333	Plain Seaming	DCx27 1#	3	5	3x2	4	4.8	0.7-2	5	7000	525*350*510	33/41

Note: H/M: suitable for heavy and medium material. SD device is available (start and end suction device); volume: 525*350*510 (mm); weight: 33.44 (kg).



C3

High Speed Automatic Overlock Machine
Auto-trimmer; Auto presser foot lift; Oil-proof




Auto tread trimming



Oil proof needle bar




One key to reset



Single shaft drive: Stable and fast

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (SPM)	Volume (mm)	Weight (kg)
C3-02/230	Plain Seaming	DCx27 1#	1	3	-	4	3.0	0.7-2	5	5800	525*350*510	30/38
C3-1-M03/333	Plain Seaming	DCx27 1#	2	4	2	4	4.6	0.7-2	5.5	5800	525*350*510	30/38
C4-1-M03/333/H/M	Heavy Duty	DCx27 1#	2	4	2	4	4.6	0.7-2	6	5000	525*350*510	30/38
C4-5-03/333	5x4 Stitch	DCx27 1#	2	5	5	5	3.8	0.7-2	5	6000	525*350*510	30/38
C3-5-03/333	3x4 Stitch	DCx27 1#	2	5	3	4	3.8	0.7-2	5	5800	525*350*510	30/38

Note: H/M: suitable for heavy and medium material.

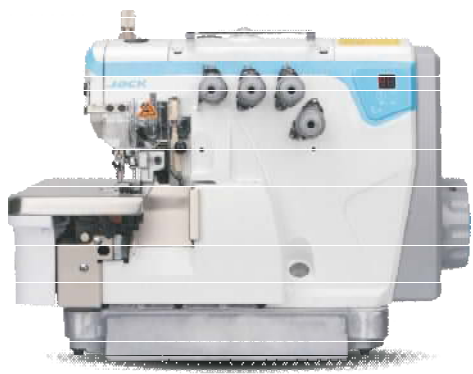

E4

Super High Speed Power-Saving Overlock Machine
Power saving; Oil proof




Suitable for light and heavy materials



Oil proof needle bar



Easy to operate




Single shaft drive; Stable and fast

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.P.M)	Volume (mm)	Weight (kg)
E4-2	Fabric Joint Sewing	DCx27 11#	1	2	-	6	3.8	0.7-2	3.5	5500	525x360x510	28.5/35
E4-02/250	Pocket Binding Sewing	DCx27 14#	2	4	5	5	3.0	0.7-2	3.5	5500	525x360x510	28.5/35
C4-3-02/233	Plain Sewing	DCx27 11#	1	3	-	4	3.0	0.7-2	5	5500	525x360x510	28.5/35
C4-3-02/233	Backstitching	DCx27 11#	1	3	-	4	3.0	0.7-2	5	5500	525x360x510	28.5/35
C4-3-12/233	Blindstitch Hemming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	5500	525x360x510	28.5/35
E4-3-32R/233	Body Overlock Stitch	DCx27 9#	1	3	-	5	3.8	0.7-2	5	5500	525x360x510	28.5/35
E4-WF-4-11/214	Non-woven Material	DCx27 14#	1	4	-	4	4.5	-	4	5500	525x360x510	28.5/35
E4-4-M33/433	Plain Sewing	DCx27 11#	1	4	2	4	4.6	0.7-2	4.4	5500	525x360x510	28.5/35
E4-4-E3/322	Back Latching	DCx27 11#	2	4	2	4	4.2	0.7-2	5.5	5500	525x360x510	28.5/35
E4-4-M33/333/H/M	Heavy Duty	DCx27 11#	2	4	2	4	4.6	0.7-2	6	5500	525x360x510	28.5/35
E4-MJ-4-53/233	Towel Drying	DCx27 11#	2	4	2	4	3.8	0.7-2	5	5500	525x360x510	28.5/35
C4-5-53/233	Strip Attach Sewing	DCx27 14#	2	5	3	4	3.0	0.7-2	5	5500	525x360x510	28.5/35
C4-5-02/233	Light Material	DCx27 11#	2	5	3	4	3.0	0.7-2	5	5500	525x360x510	28.5/35
C4-5-03/233	Lock Stitch	DCx27 14#	2	5	5	5	3.0	0.7-2	5	5500	525x360x510	28.5/35
E4-5-03/433	3rd Stitch	DCx27 14#	2	5	4	4	3.8	0.7-2	5	5500	525x360x510	28.5/35
E4-5-A04/433	Extra Heavy Duty	DCx27 14#	2	5	5	5	3.8	0.7-2	7	5500	525x360x510	28.5/35
E4-5-04/433	Plain Sewing	DCx27 11#	3	6	4	4	3.8	0.7-2	5	5500	525x360x510	28.5/35




JK-800D

Power-Saving Overlock Machine
No oil leakage




Power saving 71%



High speed and adjustable



No oil leakage



LED Light

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Needle Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.P.M)	Volume (mm)	Weight (kg)
.K-8C30-M1-15	9#	1	3	-	1.5	4	0.7-2	5.5	6000	500x360x500	28.5/36.5
.K-8C30-M2-04	11#	1	3	-	4	4	0.7-2	5.5	6000	500x360x500	28.5/36.5
.K-8C30-M5-04/BK	11#	1	3	-	4	4	0.7-2	5.5	6000	500x360x500	28.5/36.5
.K-8C10-M3-2*	11#	2	4	2	4	4.2	0.7-2	4.4	6000	500x360x500	28.5/36.5
.K-8C40-M5-23/BK	11#	2	4	2	3	4.2	0.7-2	5.5	6000	500x360x500	28.5/36.5
.K-8C50-M2-35	14#	2	5	3	5	4	0.7-2	5	5500	500x360x500	28.5/36.5
.K-8C50-M2-55	14#	2	5	5	5	4	0.7-2	5	5500	500x360x500	28.5/36.5
.K-8C50-M2-75	14#	2	5	5	6	4	0.7-2	5	5500	500x360x500	28.5/36.5

The specification of JK-800D series is the same as JK-800C series.



JK-797TDI

Small Cylinder bed Variable Top Feed Power Saving Overlock Machine
Power saving; Small cylinder; Variable top feed



48mm cylinder bed

Differential feeding;
Avoid of layers offset


Automatic extension device;
Stable and high efficiency

One machine with multifunctions

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.P.M)	Volume (mm)	Weight (kg)
JK-797TDI-3-504-02/233N	DCx2711#	1	3	-	4	3.0	0.8-1.8	5	5500	465x360x485	27.1/34.5
JK-797TDI-3-504-02/233N/FRO1	DCx2711#	1	3	-	4	3.8	0.8-1.8	5	5500	465x350x485	27.1/34.5
JK-797TDI-3-504-02/233N/FRO2	DCx2711#	1	3	-	4	3.8	0.8-1.8	5	5500	465x350x485	27.1/34.5
JK-797TDI-3-504-02/233N/KS/FRO1	DCx2711#	1	3	-	4	3.8	0.8-1.8	5	5500	465x350x485	27.1/34.5
JK-797TDI-3-504-02/233N/KS/FRO2	DCx2711#	1	3	-	4	3.8	0.8-1.8	5	5500	465x350x485	27.1/34.5
JK-797TDI-4-514-M03/333	JKx279#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465x360x485	27.1/34.5
JK-797TDI-4-514-M03/333/FRO1	JKx279#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465x360x485	27.1/34.5
JK-797TDI-4-514-M03/333/KS-FRO1	JKx279#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465x360x485	27.1/34.5
JK-797TDI-4-514-M03/333/KS/FRO2	JKx279#	2	4	2	4	3.8	0.8-1.8	5.5	5500	465x360x485	27.1/34.5

Note: 1. The parameters of small cylinder bed JK-797DI series are the same with above parameters.

2. KS: pneumatic type (vertical); FRO1: automatic extension device; FRO2: mechanical extension device.

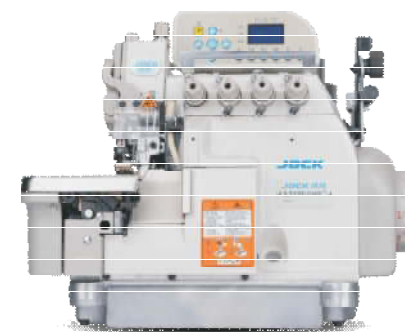

JK-798TE

Variable Top Feed Computerized Overlock Machine
Variable top feed; 798TE: automatic; 798TDI: power saving



Differential feeding;
Avoid of layers offset

Auto thread trimming

Easy to adjust differential ratio

100% safety device

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.P.M)	Volume (mm)	Weight (kg)
JK-798TE-4-514-M03/333	Plain Sewing	DCx2711#	2	4	2	4	4.0	0.7-1.5	5.5	7000	465x360x485	29.2/39.8
JK-798TE-4-514-M03/445	Extra Heavy Duty	DCx2711#	2	4	2	4	7	0.8-1.5	6	5500	465x360x485	29.2/39.8
JK-798TE-4-514-M03/445	Extra Heavy Duty	DCx2711#	2	5	3	4	3.0	0.7-1.2	5	7000	465x360x485	29.2/39.8
JK-798TE-5-515-A04/435	Extra Heavy Duty	DCx2711#	2	5	3	5	3.8	0.7-1.2	5	7000	505x360x565	29.2/39.8
JK-798TE-5-515-A04/435	Extra Heavy Duty	DCx2711#	2	5	3	6	5	0.8-1.5	7	6500	505x360x565	29.2/39.8

Note: super high speed direct drive overlock with differential ratio. JK-798TDI series.


Make the service smarter

Smart service is not only helping you to develop one quick-responding technician team, but also making the technician resources sharing possible by intelligent interaction platform.

Interlock Machine Series



K4-D

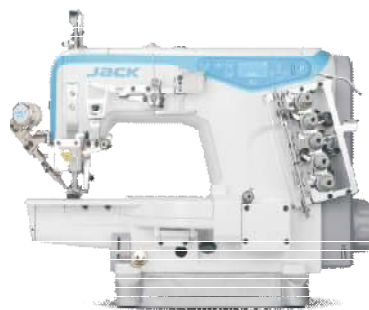


K4-UT

High Speed Computerized Cylinder-bed Interlock Machine
Full-automatic; Multi-functional; Stable




W4-D

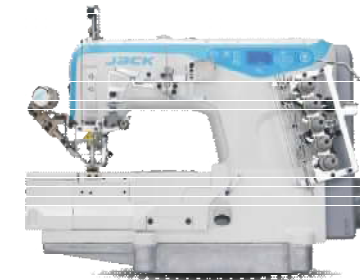


W4-UT

High Speed Computerized Flat-bed Interlock Machine
Full-automatic; Multifunctional; Stable

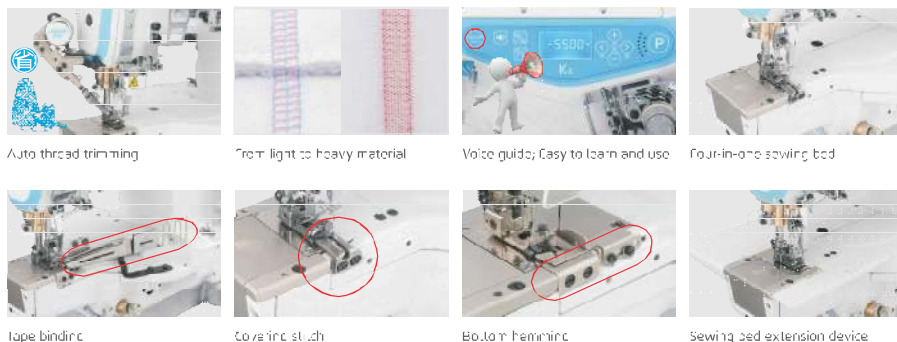

Auto thread trimming From light to heavy material Voice guide; Easy to learn and use Four-in-one sewing bed
Tape binding Covering stitch Bottom hemming Sewing bed extension device

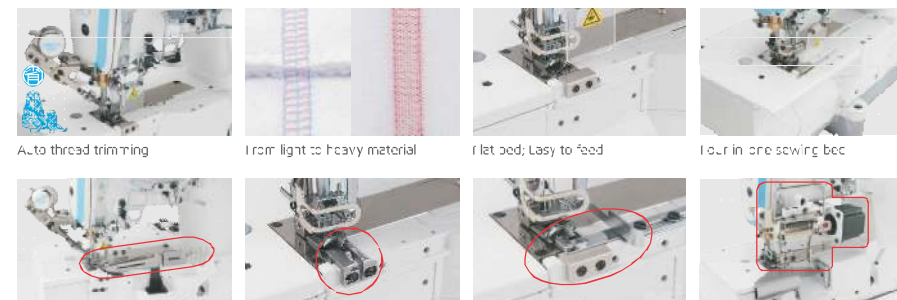

Auto thread trimming From light to heavy material Flat bed; Easy to feed Four-in-one sewing bed
Tape binding Covering stitch Bottom hemming Flat bed; Easy to feed

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (rpm)	Volume (mm)	Weight (kg)
K4-J-01GB	Main Seaming	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.8-1.3	7	5500	670x445x595	52/62
K4-J-02BB	Tape Binding	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.8-1.3	7	5500	670x445x595	52/62
K4-J-03BR	Covering Stitch	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.8-1.3	7	5500	670x445x595	52/62
K4-J-04AC	Bottom Hemming (left-side L-tten)	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.8-1.3	7	5500	670x445x595	52/62
K4-J-05AC	Bottom Hemming (left-side L-tten)	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.8-1.3	7	5000	670x445x595	52/62
K4-D-01GB	Main Seaming	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.8-1.3	7	5500	670x445x595	48/58
K4-D-02BB	Tape Binding	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.8-1.3	7	5500	670x445x595	48/58
K4-D-03BR	Covering Stitch	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.8-1.3	7	5500	670x445x595	48/58
K4-D-04AC	Bottom Hemming (left-side L-tten)	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.8-1.3	7	5000	670x445x595	47/57

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (rpm)	Volume (mm)	Weight (kg)
W4-JT-01GB	Plain Seaming	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.85-1.3	7	5500	670x445x595	51/61
W4-JT-02BB	Tape Binding	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.85-1.3	7	5500	670x445x595	51/61
W4-JT-03BR	Covering Stitch	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.85-1.3	7	5500	670x445x595	51/61
W4-JT-04AC	Bottom Hemming	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.85-1.3	7	5500	670x445x595	51/61
W4-D-01GB	Plain Seaming	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.85-1.3	7	5500	670x445x595	48/58
W4-D-02BB	Tape Binding	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.85-1.3	7	5500	670x445x595	48/58
W4-D-03BR	Covering Stitch	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.85-1.3	7	5500	670x445x595	48/58
W4-D-04AC	Elastic Lace Attaching (Right-side Cutter)	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.85-1.3	5	4000	670x445x595	48/58
W4-D-05AC	Elastic Lace Attaching (Right-side Cutter)	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.85-1.3	5	4000	670x445x595	48/58
W4-D-06AC	Bottom Hemming	UY28GAS11-4#	3	5	1.5-4.5	5.0/6.4	0.85-1.3	7	5500	670x445x595	48/58
W4-D-07GB	Main Seaming (Large Stitch Length)	UY28GAS11-4#	3	5	4-7.5	5.0/6.4	1	7	4000	670x445x595	48/58
W4-D-08GB	Main Seaming (Large Stitch Length)	UY28GAS11-4#	3	5	4-7.5	5.0/6.4	1	7	4000	670x445x595	48/58
W4-D-09GB	Tape Binding (Extra Large Stitch Length)	UY28GAS11-4#	3	4	1-7.5	5.0/6.4	1	7	4000	670x445x595	48/58

Note: U: computerized, D: direct drive




Special Machine Series



M80 Series

Programmable Electronic Large-area Pattern Sewing Machine
Intelligent; Standard; High efficiency

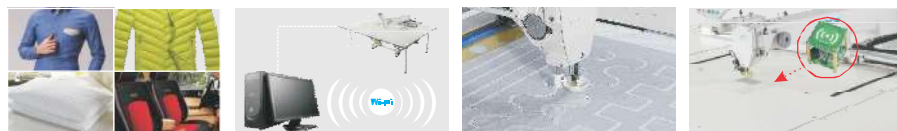

Wide range of application

WiFi remote control

Intelligent central presser foot

Intelligent recognition of patterns

Model	Application	Needle	Stitch No.	Thread No.	Sewing Range (mm)	Mid-presser Foot Lifting Height (mm)	Needle Gauge (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
M80R	Pain Sewing	DPes / 13#	2	2	1200x760	12	1.5	2800	2300x1060x400	406/502
M80C	Pain Sewing	DPes / 13#	2	2	1400x840	12	1.5	3000	2400x1060x400	446/542

Note: optional additional devices: A: auto-matic shuttle exchange; F1: laser cutting; F12: double screen display; F13: bottom line detector; F14: automatic template exchange; F15: revolving knife; F16: spiral pen device.



JK-T3020 Series

Programmable Electronic Pattern Sewing Machine
Full-automatic; Programmable



Wide range of application

Intelligent central presser foot

For heavy duty

Visual operation

Model	Optional Device	Needle	Stitch No.	Thread No.	Sewing Range (mm)	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T3020	F1	DPes / 11-25#	1	2	130x100	22	2700	1220x840x320	140/90
JK-T3020	F12+F13	DPes / 11-25#	1	2	2100x300	22	2700	1220x840x320	140/90
JK-T3020	<F10#	DPes / 11-25#	1	2	4100x200	22	2700	1220x840x320	140/90
JK-T3020	-	DPes / 11-25#	1	2	500x400	22	2300	1020x1620x1440	343/479
JK-T3020	-	DPes / 11-25#	1	2	1000x400	22	2300	1020x1620x1440	352/488

Note: F1: flip presser foot; F3: slice slip presser foot; K: clamping device; D3: pocket attaching.



JK-T5878-68B/78

Automatic Pocket Wadding Machine
Full-automatic; Programmable




JK-T5878-58BQ

Automatic Pocket Setting Machine
Full-automatic; Programmable



High output For different kinds of pocket Automatic collective device Easy to adjust; Precise cutting

Model	Application	Needle	Stitch No.	Thread No.	Needle Gauge (mm)	Pocket Size (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
JK-T5878-68B	Shirt Pocket	Mx150 14# 18#	2	3	6-20	18-220	2000	1600x1100x1500	240/350
JK-T5878-78	Sleeve Pocket	DPx114# 18#	2	3	8-20	18-220	2000	1600x1100x1500	240/350

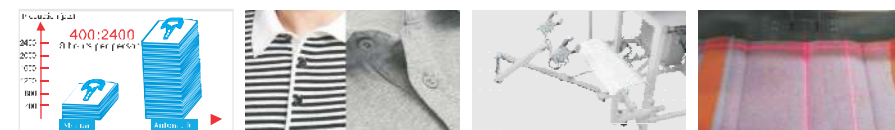


High output For different kinds of pocket Automatic collective Laser positioning

Model	Application	Needle	Stitch No.	Thread No.	Sewing Width (mm)	Sewing Length (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
JK-T5878-58BQ	T-shirt Pocket	D3x11#	1	2	1-50	15-250	1000	2060x1060x1570	200/300



JK-T1900G

Electronic Bartacking Machine
Full-automatic; Programmable; Bartacking & buttonholing

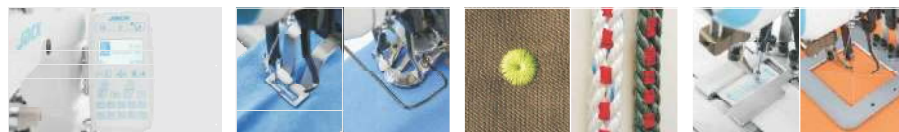

Visual operation Bartacking & buttonholing, easy shift Lap hole Fishing nets Elastic joint Sock bottom


Model	Application	Needle	Stitch No.	Thread No.	X Direction Sewing Range (mm)	Y Direction Sewing Range (mm)	Presser Foot Lifting Height (mm)	Max. Speed (S.P.M)	Volume (P.P.H)	Weight (kg)
JK-T1900GS	Light/Medium Material	DFK516#	1	2	40	30	13	3200	805x405x20	55/65
JK-T1900GH	Heavy Duty	DFK719#	1	2	40	30	13	3200	805x405x20	55/65
JK-T1900HM	Knitting Material	DFK516#	1	2	40	30	13	4700	805x405x20	55/65
JK-T1900EX	Pattern Sewing	DFK516#	1	2	40	30	13	2700	805x405x20	55/65
JK-T1900EY	Lap Hole	DFK516#	1	2	40	30	13	2700	805x405x20	55/65
JK-T1900CN	Fishing Nets	DFK719#	1	2	40	30	13	2700	805x405x20	55/65
JK-T1900CL	Bartacking for Socks	DFK714#	1	2	40	35	13	2700	805x405x20	55/65
JK-T1900GS	Pattern Sewing	DFK714#	1	2	60	50	10	2700	805x405x20	55/65
JK-T1900GP	Classic Joint	DFK714#	1	2	60	50	10	2700	805x405x20	55/65

Note: auto presser foot lifter, auto thread trimming, auto thread wiping are equipped as standard.



JK-T1903GR

Electronic Button Attaching Machine
Automatic button feeding

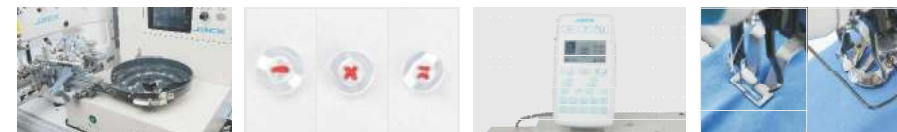

Automatic button feeding Wide range of application Easy to operate One machine with multi functions

Model	Application	Needle	Stitch	Thread	Button Diameter (mm)	Button Size (mm)	Presser Foot Lifting Height (mm)	Max. Speed (S.P.M)	Volume (P.P.H)	Weight (kg)
JK-T1903G	Resin	DPX114#	1	2	Φ8-Φ30	X:2.4-6.5 Y:2.4-5.0	10	2700	805x405x20	55/65
JK-T1903GR	Automatic Button Feeding	DPX114#	1	2	Φ8-Φ22	X:2.4-6.5 Y:2.4-5.0	10	>100	1100x870x1390	145/160

Note: auto presser foot lifter, auto thread trimming, auto thread wiping are equipped as standard.



JK-T1790E

Electronic Lockstitch Buttonholing Machine
Full-automatic; Programmable



Basting stitch before sewing

Continuously sewing (JK-T1790E)

Cutter driven by servo motor

Visual operation

Model	Application	Button Hole Size (mm)	Needle	Needle No.	Side Cutter Function	Thread No.	Parallel Intake (mm)	Presser Foot Lifting Height (mm)	Max. Speed (rpm)	Volume (mm)	Weight (kg)
JK-T1790E5-1-D	Woven Material	25x4	DPx5-12#	1	1/4"-3/4"	2	0.2-2.5	17	4200	860x390x635	65/60
JK-T1790E5-2-D	Woven Material	4x5	DPx5-12#	1	1/4"-1"	2	0.2-2.5	17	4200	860x390x635	65/60
JK-T1790E5-4-D	Woven Material	41x5	DPx5-12#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	860x490x635	65/60
JK-T1790E5-D	Woven Material	70x5	DPx5-12#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	860x490x635	65/60
JK-T1790E5-J	Woven Material	120x5	DPx5-12#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	860x490x635	65/60
JK-T1790EK-1-D	Knitting Material	25x4	DPx5KN 11#	1	1/4"-3/4"	2	0.2-2.5	17	4200	860x390x635	65/60
JK-T1790CK-2-D	Knitting Material	35x5	DPx5KN 11#	1	1/4"-1"	2	0.2-2.5	17	4200	860x390x635	65/60
JK-T1790CK-3-D	Knitting Material	41x5	DPx5KN 11#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	860x390x635	65/60
JK-T1790CK-D	Knitting Material	70x5	DPx5KN 11#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	860x390x635	65/60
JK-T1790CK-J	Knitting Material	120x5	DPx5KN 11#	1	1/4"-1 1/4"	2	0.2-2.5	17	4200	860x390x635	65/60

Note: auto presser foot lifter, auto thread trimming are equipped as standard; continuously sewing is special function of JK-T1790E series machines.



JK-T781E

Integrated Electronic Lockstitch Buttonholing Machine
Auto presser foot lifter; Automatic



Auto thread trimming;
Auto presser foot lifter

Power saving 29%

Easy to operate

Cooling fan

Model	Application	Button Hole Size (mm)	Needle	Needle No.	Side Cutter Function	Needle No.	Column Width (mm)	Automatic Thread Trimming	Automatic Presser Foot Lifter	Presser Foot Lifting Height (mm)	Max. Speed (rpm)	Volume (mm)	Weight (kg)
JK-T781E-D	Woven Material	22x4	DPx5-12#	1	1/4"-3/4"	2	0.2-2.5	√	√	2	3600	695x340x725	41/31
JK-T781E-Q	Woven Material	33x5	DPx5-12#	1	1/4"-1"	2	0.2-2.5	√	√	2	3600	695x340x725	41/31
JK-T781E-C	Woven Material	40x5	DPx5-12#	1	1/4"-1 1/4"	2	0.2-2.5	√	√	2	3600	695x440x725	41/31
JK-T781E-K-Q	Knitting Material	22x4	DPx5-12#	1	1/4"-3/4"	2	0.2-2.5	√	√	2	3600	695x440x725	41/31
JK-T781E-Q	Woven Material	22x4	DPx5-12#	1	1/4"-3/4"	2	0.2-2.5	√	√	2	3600	685x365x663	46/56
JK-T782E-Q	Woven Material	33x5	DPx5-12#	1	1/4"-1"	2	0.2-2.5	√	√	2	3600	685x365x663	46/56
JK-T783C-Q	Woven Material	40x5	DPx5-12#	1	1/4"-1 1/4"	2	0.2-2.5	√	√	2	3600	685x365x663	46/56
JK-T781C-Q	Knitting Material	22x4	DPx5-12#	1	1/4"-3/4"	2	0.2-2.5	√	√	2	3600	685x365x663	46/56



JK-T1377E

Integrated Electronic Button Attaching Machine
Automatic, easy shift




three patterns

easy shift patterns

Auto presser foot lifter


WP auto thread wiping device (optional)

Model	Needle	Stitch No.	Thread No.	Button Diameter (mm)	B.Hitch Hole Size (mm)	Automatic Thread Trimming	Automatic Presser Foot Lifter	Direct Drive Integrated	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
JK-T1377	Tex 70# 100# 16#	1	1	10-28	X (2.5-6.5) Y (0.2-4.4)	√	√	√	9	1900	570x425x720	23/28
JK-T1377E	Tex 70# 100# 16#	1	1	10-28	X (2.5-6.5) Y (0.2-4.4)	√	√	√	9	1500	620x420x430	28.5/34.5

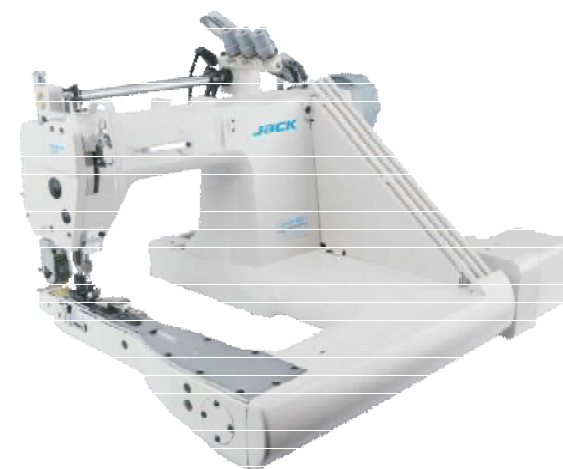

JK-T9270D/9280D

Direct Drive Feed-off-the-Arm Machine
Power saving

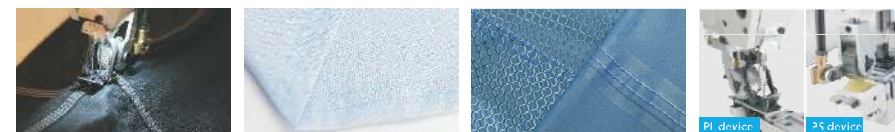

Jeans

Shirt

Raincoat

Optional pullers

Model	Needle Gauge	Needle	Stitch No.	Thread No.	Head Distance (mm)	Presser Foot Lifting Height (mm)	Light Material	Medium Material	Heavy Duty	Max. Duty	Max. Speed (mm)	Volume (mm)	Weight (kg)
JK-T9270D-2-Q	1/4.5/16	TV#64 12#	2	4	3.5	8	√				3500	625x535x475	56/60
JK-T9270D-2-2PL-Q	1/4.5/16	TV#64 12#	2	4	3.5	8	√				3500	625x535x475	56/60
JK-T9270D-2-2PS-Q	1/4.5/16	TV#64 12#	2	4	3.5	8	√				3500	625x535x475	56/60
JK-T9270D-2-2PL-Q	3/16	TV#64 12#	2	4	4.2	8	√				3500	625x535x475	56/60
JK-T9270D-3-Q	1/8	TV#64 12#	3	6	3.5	8	√				3500	625x535x475	56/60
JK-T9270D-3-2PI-Q	1/8	TV#64 12#	3	6	3.5	8	√				3500	625x535x475	56/60
JK-T9270D-3-2PS-Q	1/4.5/16	TV#64 14#	2	4	3.5	8		√			3500	625x535x475	56/60
JK-T9280D-53-Q	1/8	TV#52 1#	3	6	4.2	10			√		3500	625x535x475	56/60
JK-T9280D-73-2PI-Q	1/8	TV#52 1#	3	6	4.2	10			√		3500	625x535x475	56/60
JK-T9280D-73-PI-Q	1/8	TV#52 1#	3	6	4.2	10			√		3500	625x535x475	56/60
JK-T9280D-73-PS-Q	1/8	TV#52 1#	3	6	4.2	10			√		3500	625x535x475	56/60

Note: PI: rear puller; PS: box puller; JK-T9270D-12-2PL-Q needle Gauge is 4.2mm for sewing rain coats.




Heavy-duty Machine Series



JK-2060G

Compound Feeding Computerized Lockstitch Machine for Heavy-duty
Full-automatic; Compound feeding; Large space




Compound feeding

For 8 layers of leather

Large space


Auto presser foot lifter (optional)

Model	Application	Needle No.	Stitch No.	Thread Gauge (mm)	Two Presser Foot Working Distance (mm)	Presser Foot Lifting Height (mm)	Max. Speed (rpm)	Automatic Thread Trimming	A. In Reverse	Electronic Thread Tension	Direct Drive, Integrated	Auto Presser Foot Lifter	Volume (mm)	Weight (kg)
JK-2060CHC-3Q	Sofa, Car Seat, Luggage, Shoes 20-23#	DP-17	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓	✓	785*320*605	43/53
JK-2060CHC-4Q	Sofa, Car Seat, Luggage, Shoes 20-23#	DP-17	2	1-9	2.5-5.5	0/16	2200	✓	✓	✓	✓	✓	785*320*605	43/53

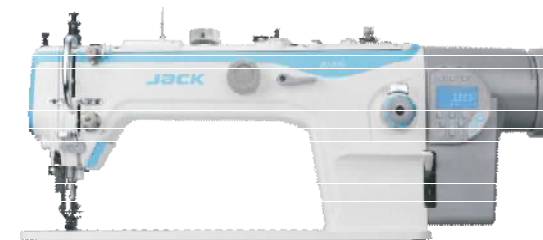

JK-2030G

Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty
Full-automatic; Top and bottom feeding; Large space



Top and bottom feeding

For 8 layers of leather

Large space


Auto presser foot lifter (optional)

Model	Application	Needle No.	Stitch No.	Thread Gauge (mm)	Two Presser Foot Working Distance (mm)	Presser Foot Lifting Height (mm)	Max. Speed (rpm)	Automatic Thread Trimming	A. In Reverse	Electronic Thread Tension	Direct Drive, Integrated	Auto Presser Foot Lifter	Volume (mm)	Weight (kg)
JK-2030CHC-3Q	Sofa, Car Seat, Luggage, Shoes 20-23#	DP-17	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓	785*320*605	43/53
JK-2030CHC-4Q	Sofa, Car Seat, Luggage, Shoes 20-23#	DP-17	1	2	1-9	2.5-5.5	8/16	2200	✓	✓	✓	✓	785*320*605	43/53



JK-2001G

Long Stitch Length Lockstitch Machine for Heavy-duty Auto-Timmer; Stitch length 12mm



For heavy duty



Big stitch length



Large spool



One key to reset

Model	Application	Needle No.	Stitch No.	Thread No.	Presser Foot	Presser Foot Winding Distance (mm)	Presser Foot Lifting Height (mm)	Max. Speed (rpm)	Automatic Thread Trimming	Auto Reverse	Electronic Thread Tension	Direct Drive Integrated	Volume (mm)	Weight (kg)
JK-2001G	Tent, Curtains, Bedcords, Disposable Slippers	DPx17	20-23	1	2	1-12	0/16	3300	✓	✓	✓	✓	690×255×550	39/2



JK-6380E

Top & Bottom Feeding Computerized Lockstitch Machine for Heavy-duty top and bottom feeding; Full-automatic



For heavy duty



Scaled lifter shaft of presser foot



Auto presser foot lifter




Direct drive: Power saving


Model	Application	Needle No.	Stitch No.	Thread No.	Presser Foot	Presser Foot Winding Distance (mm)	Presser Foot Lifting Height (mm)	Max. Speed (rpm)	Automatic Thread Trimming	Auto Reverse	Electronic Thread Tension	Direct Drive Integrated	Auto Presser foot Lifter	Volume (mm)	Weight (kg)
JK-6380C-30	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-8	3.5-5.5	0/16	2000	✓	✓	✓	✓	✓	690×255×550	39/2
JK-6380E-40	Sofa, Car Seat, Luggage, Shoes	DPx17 20-23#	1	2	1-8	3.5-5.5	0/16	2000	✓	✓	✓	✓	✓	690×255×550	41/4
JK-6380E-410	Gloves, Handbag, Pillow, Blanket, Edgings	DPx17 14#	1	2	1-8	3.5-5.5	0/16	1800	✓	✓	✓	✓	✓	680×255×550	38/2
JK-6380E-0	Sofa, Car Seat, Luggage, Shoes	DPx17 20-24#	1	2	1-8	3.5-5.5	0/16	2000	✓	✓	✓	✓	✓	690×255×550	37/38
JK-6380E-0-12	Sofa, Car Seat, Luggage, Tent, Curtain	DPx17 20-24#	1	2	1-12	3.5-5.5	0/16	2000	✓	✓	✓	✓	✓	690×255×550	37/38
JK-6380C	Sofa, Car Seat, Luggage, Shoes	DPx17 20-24#	1	2	1-8	3.5-5.5	0/16	2000	✓	✓	✓	✓	✓	690×255×550	37/38
JK-6380C-12	Sofa, Car Seat, Luggage, Tent, Curtain	DPx17 20-24#	1	2	1-12	3.5-5.5	0/16	2000	✓	✓	✓	✓	✓	690×255×550	37/38

CONFIGURATION


Shirt

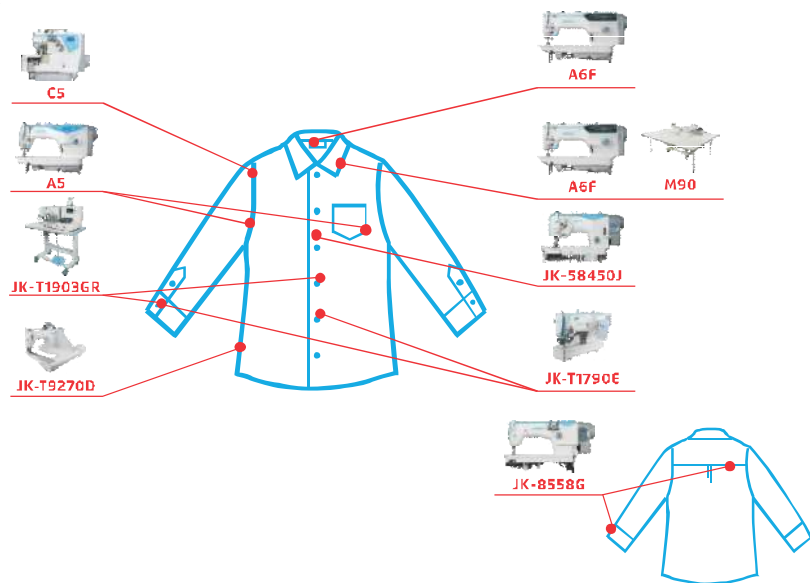


Jeans

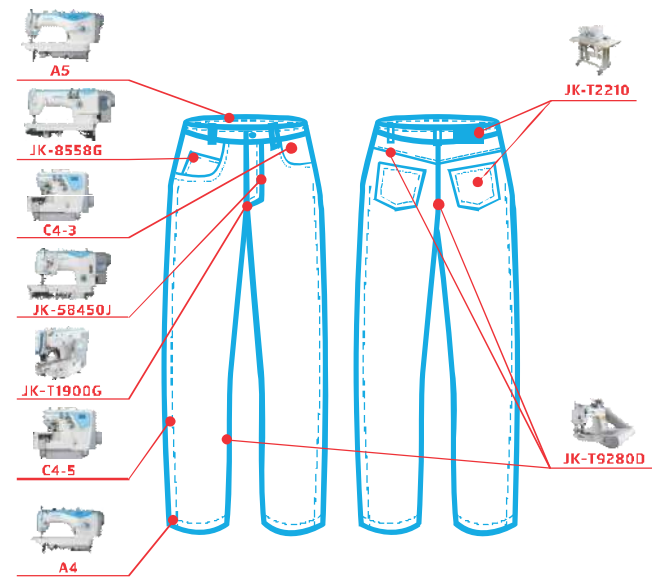


Trousers

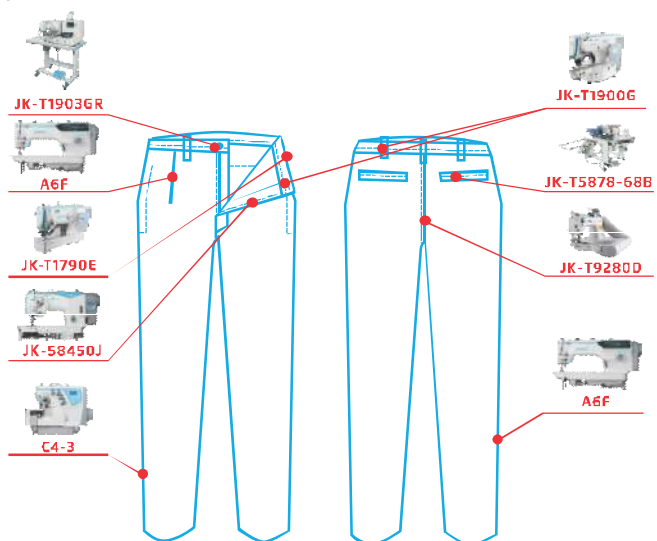


Bra

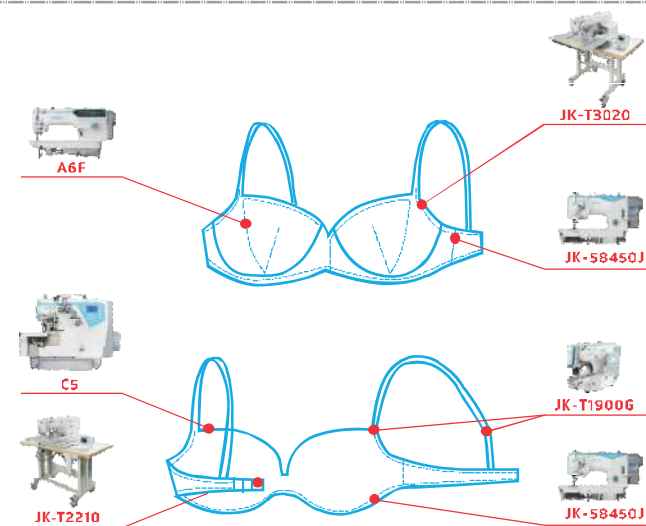


Briefs

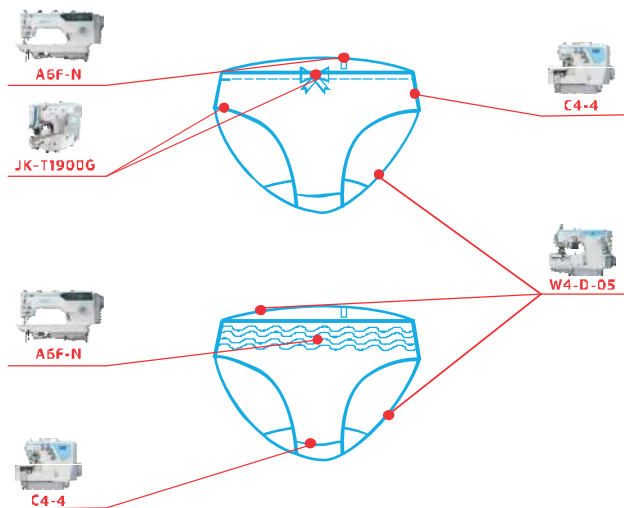


Dresses

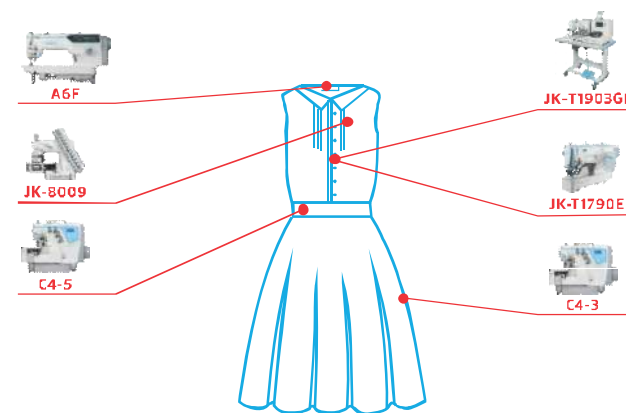

Polo-shirt

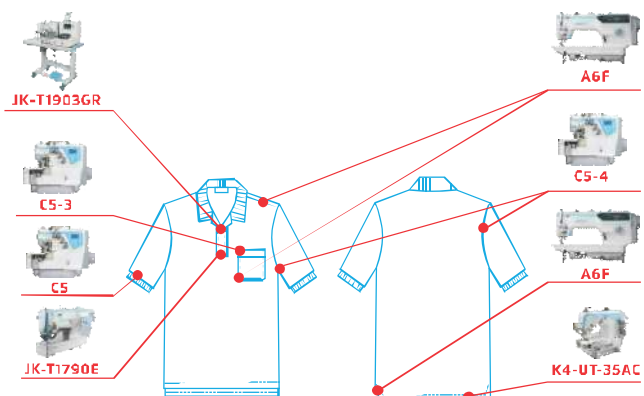


Bag

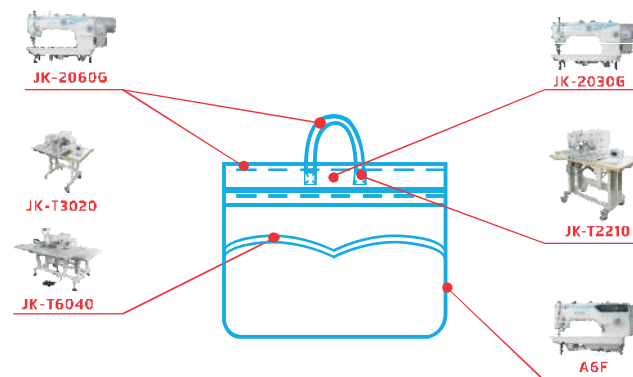


STITCH TABLE

Lockstitch

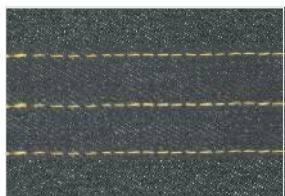

Lockstitch with short thread tail
P03

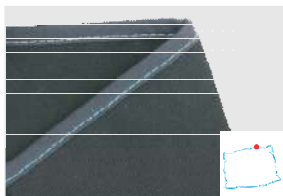

edge cut and tape binder
P09




Cutting after sewing
P09




Double needle straight stitch
P08



Double needle corner stitch
P08

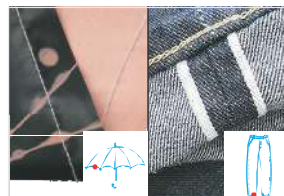

Single needle chain stitch
P10

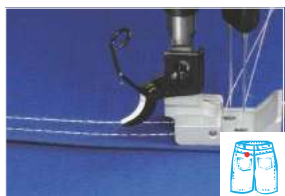

Double needle chain stitch
P10



Triple needle chain stitch
P10



Heavy duty
P39-42


Overlock



Pocket double chain rolling stitch
P15




Fabric joint sewing
P17

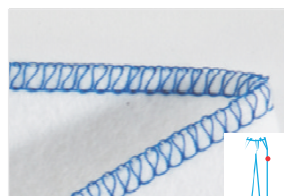

Three threads stitch
P15




Three threads back latching stitch
P17

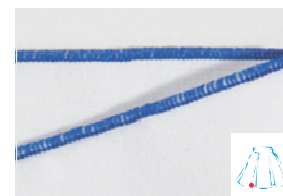

Three threads baby overlock stitch
P15



Three threads blindstitch hemming
P15

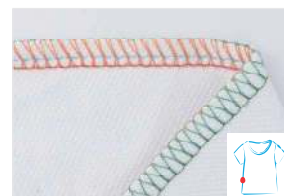

Four threads stitch
P15




Four threads back latching stitch
P17



Four threads shirring stitch
P18



Four thread tape attach stitch
P15

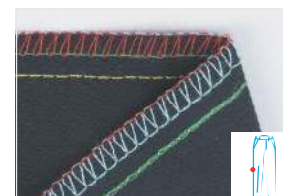

Five threads stitch
P15



Five threads heavy duty stitch
P15



Five threads pocket double chain rolling stitch
P15




Six threads sewing
P15



Four threads variable top feed
P18

Four Thread Interlock

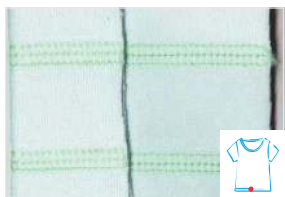


Plain seaming
P21/P22/P23




Tape binding
P21/P22



Covering stitch (one side)
P21/P22

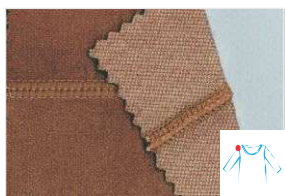

Covering stitch
P21/P22

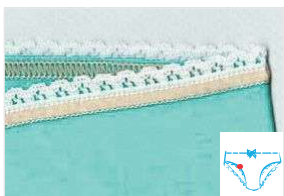

Elastic lace attaching
P22



Bottom hemming
P21/P22/P23



Bottom hemming (left cutter)
P21




Cylinder cover stitch
P23



Elastic attaching
P24



T-shirt folding seaming
P24

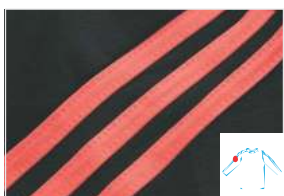


Tape attaching
P24




Waist band
P24

Button Holing/Button Attaching

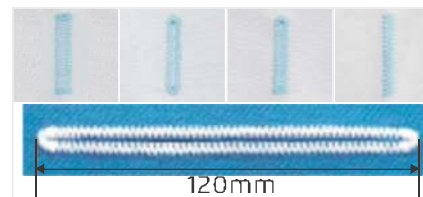

Button holing stitch
P33

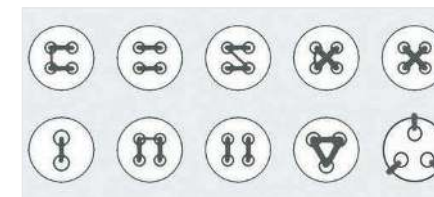


Button attaching stitch
P32/P35

Bartacking Machine Stitch




Bartacking stitch
P31

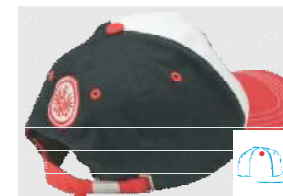


Cap hole stitch
P31



Small pattern
P31




Fishing net
P31

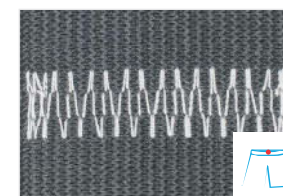


Elastic joint
P31




Cross bartacking stitch
P31

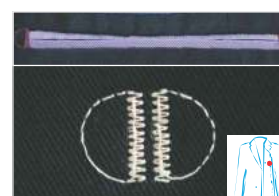

Suits bartacking stitch
P31

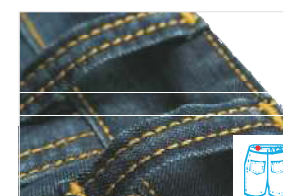

Jeans bartacking stitch
P31

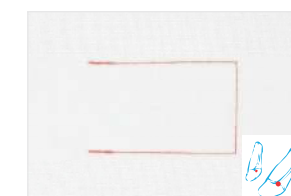

Bartacking for socks
P31

Pattern Stitch

Apparel



Non-apparel



Home textile



Others



Chain Stitch



Triple needle thread-off-the-arm machine
P36




Double needle thread-off-the-arm machine
P36

Placket Samples



Visible placket
P30

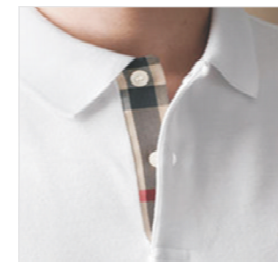

Invisible placket
P30



"V" placket
P30

Pocket Stitch



Single welt pocket
P29



Double welt pocket
P29



Double welt pocket with flap
P29