


BRILLISTAR


Paper Size Validation

1. Before printing, set page scaling to "None" on your printer's settings.
2. Once printed, measure the bar below with a ruler ensuring it is exactly 6 inches/15.2mm in length.

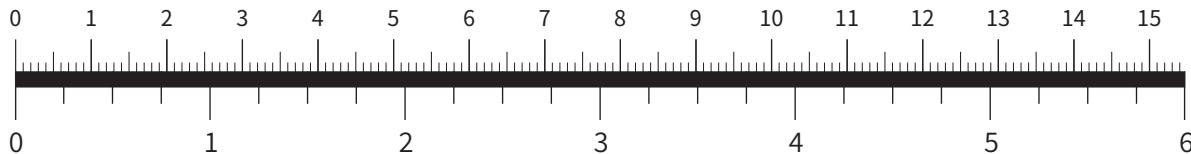


A. Measure Ring Size of Your Own Ring

1. Use a ring that is properly sized for the intended finger.
2. Place the current ring over the circles below and match the inside of the ring to the circle of the closest size.
3. When a ring is between two sizes, order a quarter size in between those two sizes.

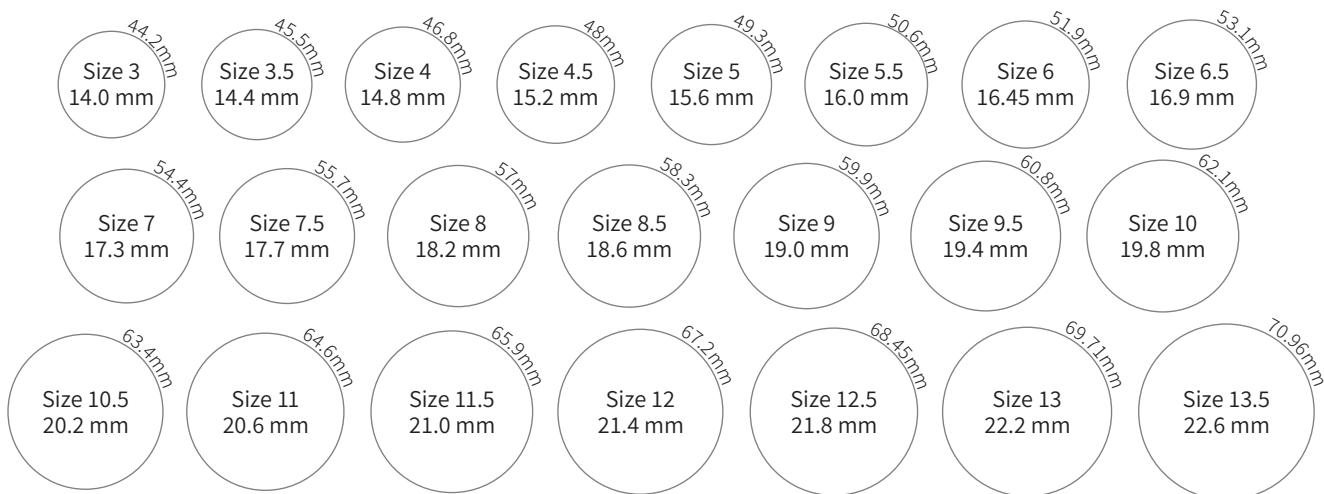

B. Measure Finger Size With Cutout Sizer

1. Use a scissors and carefully cut out the Finger Sizer. Make a small slit where it says "Cut Here".
2. Wrap the Sizer around the intended finger.
3. Put the right end of the Sizer through the slit opening with the numbers facing outwards.
4. Pull the Sizer tightly around your finger until it is snug.
5. The number that is aligned with the opening of the slit is your accurate finger size.



BRILLISTAR

Inside Circumference		Diameter	US, Canada, Mexico	UK, Australia, Ireland, New Zealand, South Africa	France	Germany, Russia, Ukraine, Asia	India, China, Japan, South America, Turkey, Israel	Italy, Spain, Netherlands, Switzerland
IN	MM							
1.74	44.2	14.1	3	F	44	14	4	4
1.77	44.8	14.3	3.25	F 1/2	44.625	14.25	---	4.625
1.79	45.5	14.5	3.5	G	45.25	14.5	5	5.25
1.82	46.1	14.7	3.75	G 1/2	45.875	14.75	6	5.875
1.84	46.8	14.9	4	H	46.5	15	7	6.5
1.87	47.4	15.1	4.25	H 1/2	47.125	15.25	---	7.125
1.89	48	15.3	4.5	I	47.75	15.5	8	7.75
1.92	48.7	15.5	4.75	J	48.375	---	---	8.375
1.94	49.3	15.7	5	J 1/2	49	15.75	9	9
1.97	50	15.9	5.25	K	49.625	16	---	9.625
1.99	50.6	16.1	5.5	K 1/2	50.25	16.25	10	10.25
2.02	51.2	16.3	5.75	L	50.875	---	11	10.875
2.04	51.9	16.5	6	L 1/2	51.5	16.5	12	11.5
2.07	52.5	16.7	6.25	M	52.125	16.75	---	12.125
2.09	53.1	16.9	6.5	M 1/2	52.75	17	13	12.75
2.12	53.8	17.1	6.75	N	53.375	---	---	13.375
2.14	54.4	17.3	7	N 1/2	54	17.25	14	14
2.17	55.1	17.5	7.25	O	54.625	17.5	---	14.625
2.19	55.7	17.7	7.5	O 1/2	55.25	17.75	15	15.25
2.22	56.3	17.9	7.75	P	55.875	---	---	15.875
2.24	57	18.1	8	P 1/2	56.5	18	16	16.5
2.27	57.6	18.3	8.25	Q	57.125	18.25	---	7.125
2.29	58.3	18.6	8.5	Q 1/2	57.75	18.5	17	17.75
2.32	58.9	18.8	8.75	R	58.375	18.75	---	18.375
2.34	59.5	18.9	9	R 1/2	59	19	18	19
2.37	60.2	19.2	9.25	S	59.625	19.25	---	19.625
2.39	60.8	19.4	9.5	S 1/2	60.25	19.5	19	20.25
2.42	61.4	19.5	9.75	T	60.875	19.75	---	20.875
2.44	62.1	19.8	10	T 1/2	61.5	20	20	21.25
2.47	62.7	20.0	10.25	U	62.125	20.25	21	22.125
2.49	63.4	20.2	10.5	U 1/2	62.75	20.5	22	22.75
2.52	64	20.4	10.75	V	63.375	---	---	23.375
2.54	64.6	20.6	11	V 1/2	64	20.75	23	24
2.57	65.3	20.8	11.25	W	64.625	---	---	24.625
2.59	65.9	21.0	11.5	W 1/2	65.25	21	24	25.25
2.62	66.6	21.2	11.75	X	65.875	---	---	25.875
2.65	67.2	21.4	12	X 1/2	66.5	21.25	25	26.5
2.68	68.1	21.7	12.25	Y	67.125	21.5	---	27.125
2.71	68.5	21.8	12.5	Z	67.75	21.75	26	27.75
2.72	69.1	22.0	12.75	Z 1/2	68.375	---	---	28.375
2.75	69.7	22.2	13	---	69	22	27	29