


Dual-Axle Water Trailer



Control dust on every job site with the dual-axle, 510-gallon water trailer. Offering rear spray, fire and garden hose hook-ups and hydrant fill capabilities, this tough and durable water trailer is perfect for cleaning parking lots, heavy equipment, streets and a host of other applications. Paired with a 2-inch semi-trash pump this combination can tackle any job requiring portable water.

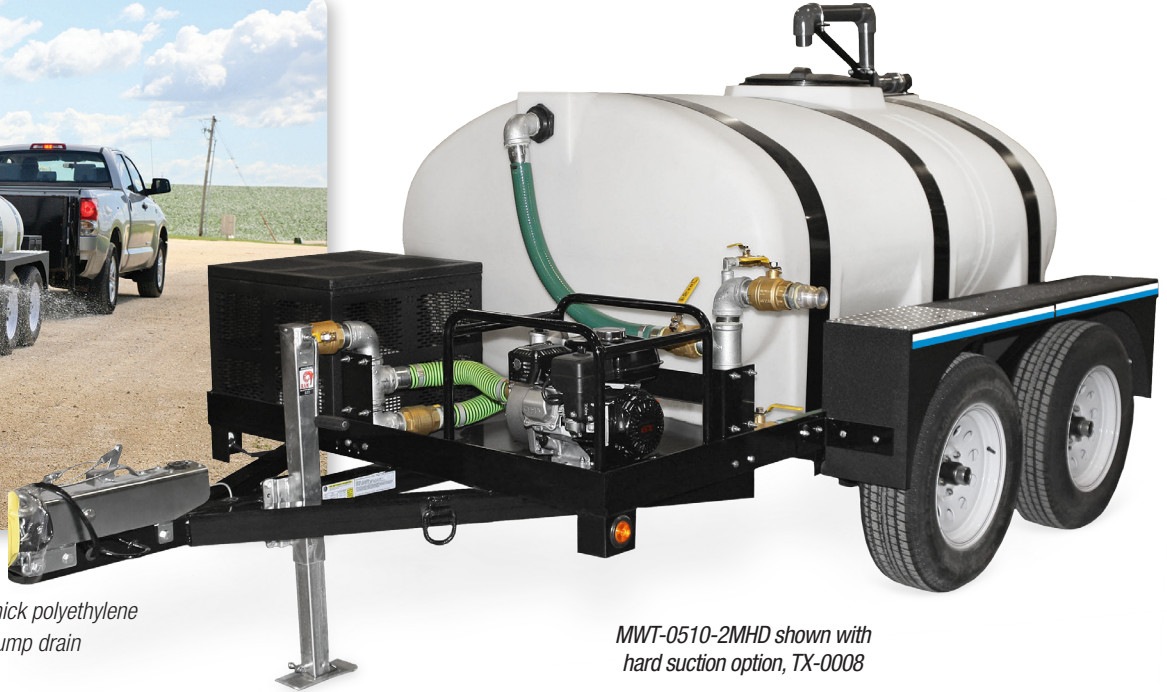

MWT-0510-2MHD shown with hard suction option, TX-0008

Tank

- 510-gallon elliptical low profile 3/8-inch thick polyethylene
- 16-inch manhole with 4-inch vent and sump drain

Central manifold

- Easy-to-operate butterfly brass valves

Plumbing

- 1 1/2-inch fire hose hook-up with 50-foot x 1 1/2-inch hose and fog nozzle
- Break-away hydrant fill with 25-foot x 2 1/2-inch hose
- Dual rear spray heads
- Garden hose connector
- Manifold discharge system
- Water hammer prevention valve

Trailer

- DOT approved
- 12-inch underclearance at axle
- 7,000-lb. side-mount crank jack
- Dual leaf spring suspension
- Rubber mounted sealed lights
- Wire storage basket
- Two safety chains with snap hooks

Semi-Trash Pump:

- 2-inch suction and discharge that handles solids up to 3/4-inch
- Heavy-duty powder coated wraparound frame with 1-inch steel tubing
- Silicon carbide mechanical seals
- Precision molded cast iron impeller and volute for reduced vibration and wear



Model Number	Displacement/Engine	Pump	Coupler	Tires	Axles	Bed Frame	Trailer Dimensions (LxWxH)	Trailer Wt. (Empty)	Trailer Wt. (Loaded)
MWT-0510-2MHD	118cc Honda GX120 OHV	2in. semi-trash	2in.	(4) ST225-75 15in.	(2) 3,500 lb. tandem with hydraulic surge brakes	5ft.x8ft.	13ft. 7in.x82in.x70in.	1,580 lb.	5,900 lb.

Option:		
Part Number	Description	Fits Model
TX-0008	Hard suction option - Allows you to draw water from an auxiliary source (pond, water pit, etc.). The fire hose is designed to be used with pressurized water and lays flat for easy storage.	MWT-0510-2MHD