

# **HDS UPRIGHT CLASS**

Compact, professional upright hot water pressure washer that is lightweight and easy to transport.



### Order no.

### 1.064-907.0

- Professional entry-level model for mobile applications
- Innovative, space-saving upright design
- Flue gas temperature monitor

#### Cartridge filter paper

1	cal thuge thter paper		
	EAN code		886622014072
	Power supply	Ph / V / Hz	1 / 120 / 60
	Flow rate	gal/min	1.7
	Operating pressure	psi	1200 / max. 1700
	Connected load	hp	2.3
	Ship Weight (with accessories)	lb	144.2
	Weight incl. packaging	lb	162.3
	Dimensions (L × W × H)	in	24.3 × 24.3 × 39.1

Sweepers and vacuum sweepers	
Digital Solutions	
Suction nozzles	with stainless steel pistons
Steam Cleaners	
Triple nozzle (0°/25°/40°)	manual
Walk-behind floor sweeper	EASY!Force Advanced
Ride-on floor scrubber	
Included in delivery.	





### Innovative upright design

- Effortless transport over landings or stairs.
- Large wheels for unpaved surfaces.



### Fine-mesh water filter


- Efficiently protects high-pressure pump against contamination.
- Professional Air Purifier



#### Compact design

- Space-saving storage and transport.
- Spill-proof pump and fuel tank for transport lying down.
- Ideal for small service vehicles.

## **EQUIPMENT FOR HDS UPRIGHT CLASS** 1.064-907.0

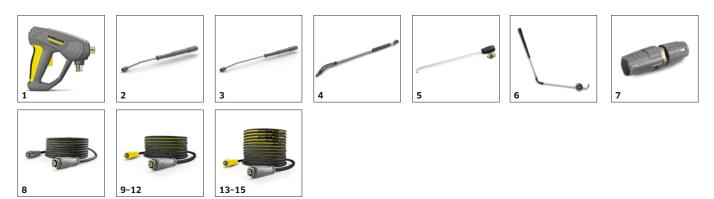

		Order no.	Crevice nozzles	
TRIGGER GUNS				
EASY!Force Advanced Pressure Washer Trigger Gun	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 33 ", rotatable	2	4.112-006.0	33-inch / 850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable $360^\circ$ under pressure.	
Spray lance, 41 ", rotatable	3	4.112-000.0	41" stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Flexible spray lance				
Flexible lance, 41 "	4	4.112-035.0	41" flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	
Gutter cleaner				
Gutter cleaning lance	5	2.112-015.0		
Undercarriage spray lance				
Underbody lance	6	4.112-032.0		
MULTIPLE-JET NOZZLES				
Triple nozzles				
Triple nozzle, 032	7	4.117-027.0	Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application.	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
Pressure washer hose, 33 ft, DN 6, 3626 PSI,				
2 × EASY!Lock	8	6.110-034.0	High-pressure hose, 33' long with EASY!Lock hand screw connection at both ends. ID 6, suitable for up to 3.625 PSI.	
2 × EASY!Lock	8	6.110-034.0 6.110-035.0		·
2 × EASY!Lock Pressure washer hose, 33 ft, DN 8, 4569 PSI, 2 × EASY!Lock				
Pressure washer hose, 33 ft, DN 8, 4569 PSI,	9	6.110-035.0		
Pressure washer hose, 33 ft, DN 8, 4569 PSI, 2 × EASY!Lock Pressure washer hose, 49 ft, DN 8, 4569 PSI,	9	6.110-035.0 6.110-031.0		
Pressure washer hose, 33 ft, DN 8, 4569 PSI, 2 × EASY!Lock Pressure washer hose, 49 ft, DN 8, 4569 PSI, 2 × EASY!Lock Pressure washer hose, 98 ft, DN 8, 4569 PSI,	9 10 11	6.110-035.0 6.110-031.0 6.110-030.0		
Pressure washer hose, 33 ft, DN 8, 4569 PSI, 2 × EASY!Lock Pressure washer hose, 49 ft, DN 8, 4569 PSI, 2 × EASY!Lock Pressure washer hose, 98 ft, DN 8, 4569 PSI, 2 × EASY!Lock	9 10 11	6.110-035.0 6.110-031.0 6.110-030.0 6.110-014.0		

■ Included in delivery. □ Available accessories. O Cleaning agents.

# **EQUIPMENT FOR HDS UPRIGHT CLASS** 1.064-907.0

13-15 16   10 10   10 10   10 10   10 10   10 10		7	$\left  \begin{array}{c} \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\$	
		Order no.	Crevice nozzles	
HIGH-PRESSURE HOSES				
Longlife 400 with unions on both sides				
Pressure washer hose, heavy-duty, 49 ft, DN 8, 5802 PSI, 2 × EASY!Lock	15	6.110-029.0		
Food industry version with unions on both side	es			
Pressure washer hose, food-grade, 33 ft, DN 8, 3626 PSI, 2 × EASY!Lock	16	6.110-051.0	Pressure washer hose (ID 6), 98-foot long, with gray, non-marking outer covering. Approved for us in the food industry. With quick and robust EASY!Lock hand screw connection at both ends.	e 🗆
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 40°		1		
Power nozzle 40°, 040	17	2.113-003.0		
NOZZLE UNION / SPACER				
Nozzle union Pressure Washer Screw Protection Part TR only for replacement	18	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	
PIPE CLEANING				
Pipe cleaning hose, ID 6	1	1		
Pipe cleaning hose, DN 6, 20 m, 220 bar	19	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	
FLOOR AND HARD SURFACE CLEANER				
Hard Surface Cleaner FRV 30				
Add-on kit hose attachment		2.642-528.0		
Add-on kit dirt trap	21	2.642-532.0		
FR 30 Me surface cleaner		0.444.040.5		
FR 30 ME surface cleaner	22	2.111-013.0		
Machine-specific nozzle kits for FR	22	2640 402.0		
Nozzle kit for FR, 118 gal/h – 132 gal/h	23	2.640-482.0		
Machine-specific nozzle kits for FRV Nozzle kit for FRV, 035	24	2.642-430.0		
	24	2.042-430.0		
FRV 30 Me surface cleaner Suction hose FRV 30 me	25	4.441-040.0		
FRV 30 ME	25			
MIXERS AND INJECTORS	20	2.111-012.0		
Cleaning agent injector				
Detergent injector for high pressure	27	4.637-033.0		
QUICK CONNECT	/			
Quick-fitting pipe union coupler trapezo	28	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit,	
			suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	

Available accessories.

# **EQUIPMENT FOR HDS UPRIGHT CLASS** 1.064-907.0

•)) 29	30	31	32	33	34	35
36	37	38	39-40	41	42	

		Out on the	Service and a	
		Order no.	Crevice nozzles	
QUICK CONNECT	29	2.115-001.0	Hardened staipless steel male soupling for quick soupling 2.115,000. With M.22 v.1.5 external	
Quick-fitting pipe union plug nipple tra	29	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 $\times$ 1.5 external thread.	
COUPLING PARTS				ſ
Connector				
Nozzle connector/screw connector	30	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) – $1 \times M 22 \times 1.5/1 \times M 18 \times 1.5$ .	
Screw union	31	4.111-038.0		
Adapter EASY!Lock				
Adapter 4 – AVS – EASY!Lock	32	4.111-032.0	EASY!Lock - AVS. Adapter for connecting EASY!Force trigger gun and high-pressure hoses with AVS swivel connection.	;
Adapter 8 – M18 × 1.5 – EASY!Lock	33	4.111-036.0	EASY!Lock – M 18 $\times$ 1.5. Adapter for connecting spray lances with EASY!Lock and nozzles with M 18 $\times$ 1.5 connection.	
Coupler -2xM22x1,5	34	4.111-037.0	Adapter 9 to connect the new hose with the new hose	T
HOSE REELS				ĺ
Automatic, self-winding hose reels				
Powder-coated swivel holder	35	2.639-931.0		
FASSADEN- UND SOLARREINIGUNG				
Teleskopstangen				
Telescope lance hybrid 7 m	36	4.762-610.0		
Telescope lance carbon 10 m	37	4.762-612.0		
Telescope lance carbon 14 m	38	4.762-613.0		
WET BLASTING ATTACHMENT				
Wet blasting attachment (without nozzle)				
Wet blasting attachment with flow control (without nozzles)	39	4.115-000.0		
Wet blasting attachment without flow control (nozzles not included)	40	4.115-006.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	
WATER CONNECTION				
Water supply hose				
Water supply hose	41	4.440-207.0		
WASHING BRUSHES				
Rotating washing brush				
Rotary Washing Brush (nylon bristles)	42	4.113-004.0	The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to $60^{\circ}$ C. (M 18 × 1.5, replaceable brush insert).	

□ Available accessories.

# EQUIPMENT FOR HDS UPRIGHT CLASS 1.064-907.0



		Order no.	Crevice nozzles	
WASHING BRUSHES				
Rotating washing brush				
Rotary Washing Brush (natural bristles)	43		Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to $60^{\circ}$ C, M 18 × 1.5 (replaceable brush insert).	

□ Available accessories.