



Z3 Seat Mod Kit


Working on automobiles and/or automobile parts is very dangerous. It is important to understand one's ability and skillset. If in any doubt, let a professional handle the job. Thayer Motorsports, Inc. (including, but not limited to, all members, owners, employees and associated parties) will not be held responsible for any injuries or damages as a result of product purchase, installation and/or ownership.

Basic Instructions:

- Move seat full forward.
- Fully incline seat back.
- Remove rear seat bolts w/ 16mm socket or wrench.
- Move seat backwards just enough to clear front nuts.
- Remove front nuts w/ 13mm wrench.
- Prop seat up to gain access to body studs.
- Place standard washer on body stud.
- Place coupler on body stud and tighten w/ 13mm wrench.
- Using a 4mm allen key, insert extension stud into coupler.
- Place a standard washer followed by a fender washer onto the stud.
- Unprop seat and lower onto new studs.
- Move seat full forward.
- Reinstall rear seat bolts w/ 16mm socket or wrench.
- Move seat full back.
- Place fender washer over stud and reinstall factory nut w/ 13mm wrench.

Parts Included:

- 8x Standard Washers
- 4x Couplers
- 8x Fender Washers
- 4x Studs

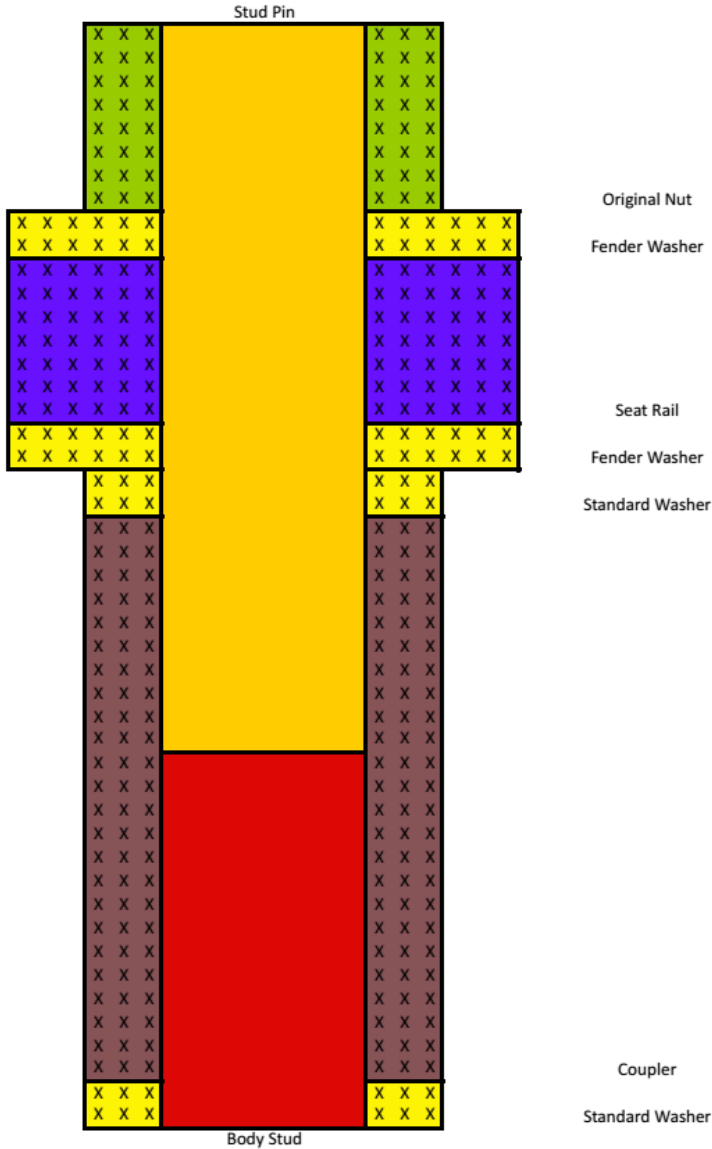

This guide is property of Thayer Motorsports, Inc. and cannot be reproduced without written authority.