



Fibreworks[®]
SISAL TILES



COLORS

Offered in 5 neutral colors

7050

Tweed

7052

Dove Tail

7051

Twilight Moon

7058

Grey

7059

Black

* Featured on cover

TECHNICAL INFORMATION

Coverage Area: 2.688 sq ft/tile

Tile Size: 19.685" x 19.685"

Backing: PVC

Tiles Per Box: 16

Square Yardage Per Box: 4.78 sq yds

Box Weight: Approximately 63 lbs

Pile Height: 0.197"

Total Tile Height: 0.276"

WHY SISAL TILES?

Sisal tiles are a functional option in natural fiber floor coverings. Here are several features that are unique to sisal tiles.



ANTI-STATIC

Sisal fibers help repel the buildup of dirt and debris and reduce static charge.



FASHIONABLE

Sisal tiles provide a boucle texture and show as a clean aesthetic.



EASY TO MAINTAIN

If a tile is damaged over time, simply remove that tile and replace with a new one.



SOUND ABSORBENT

The inherent acoustical properties of sisal enable them to reduce vibrations and absorb sound.



SUITABILITY

The surface of each tile is made from 100% natural sisal fibers. Sisal tiles can withstand moderate to heavy foot traffic.



7052 Dove Tail

GUIDELINES

SISAL TILES HAVE UNIQUE CHARACTERISTICS INHERENT TO ALL NATURAL FIBER FLOOR COVERINGS:


- Tiles are cut square, although the sisal ribs will not be perfectly straight. This is an inherent characteristic of woven sisal.
- Sisal is a natural fiber and will react to changing temperature and humidity conditions.
- As tiles adjust to changing conditions, slight movement is normal. Gaps between tiles may occur and are the result of contraction and expansion despite correct installation.
- As with any woven product, fraying and zippering may occur over time or through use. It is good to have extra tiles for replacement needs.
- Colors will change over time.
- Sisal tiles are intended for residential indoor use.

NOTE THE FOLLOWING BEFORE INSTALLING SISAL TILES:

- Refer to The Carpet and Rug Institute [CRI 105 Section 17](#) for general installation guidelines.
- Tiles can be loose laid or installed as a more permanent option with a pressure sensitive adhesive.
- Before installation, tiles should be given 24 hours to acclimate to current room temperature and humidity.
- Floors should be clean, smooth, and flat before installation.

REQUIRED INSTALLATION TECHNIQUE:

- Lay each tile with a quarter turn so the ribs are going in different directions.
- This required installation method provides dimensional stability, while enhancing pattern and texture.
- Due to color variation of natural fibers, it is beneficial to mix tiles from different boxes as you place them.

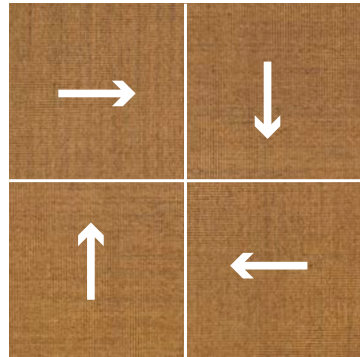

7050 Tweed

MAINTENANCE:

- To extend the longevity of sisal tiles, be sure to take reasonable precautions based on use. For example, placing chair pads under rolling desk chairs to avoid damaging the floor covering.
- Refer to www.fibreworks.com/pages/resources#care-cleaning-and-vacuuming for proper care and cleaning of natural fibers.



2301 Brennen Business Court, Louisville, KY 40299 | 800-843-0063 (press 2)

Visit our website: www.fibreworks.com to view our entire array of products, including custom area rugs.

