

EMC Test Report

Client Name : Shenzhen Grenergy Technology Co., Ltd.
Address : Room 101, building a, No.10, Jinlong 2nd Road, Tongle community, Baolong street, Longgang District, Shenzhen City, Guangdong Province, P.R.China
Product Name : Portable Power Station Solid-state Lithium-ion Battery Pack
Date : Mar. 17, 2022



Shenzhen Anbotek Compliance Laboratory Limited

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Code:AB-EMC-02-b



Hotline

400-003-0500

www.anbotek.com

Contents

- 1. General Information.....5
 - 1.1. Client Information..... 5
 - 1.2. Description of Device (EUT)..... 5
 - 1.3. Auxiliary Equipment Used During Test..... 5
 - 1.4. Description of Test Modes..... 6
 - 1.5. Test Summary..... 6
 - 1.6. Test Equipment List..... 7
 - 1.7. Description of Test Facility..... 9
 - 1.8. EMS Performance Criteria..... 9
- 2. Power Line Conducted Emission Test..... 10
 - 2.1. Test Standard and Limit..... 10
 - 2.2. Test Setup..... 10
 - 2.3. EUT Configuration on Measurement..... 10
 - 2.4. Operating Condition of EUT..... 10
 - 2.5. Test Procedure..... 11
 - 2.6. Test Results..... 11
- 3. Radiated Emission Test..... 14
 - 3.1. Test Standard and Limit..... 14
 - 3.2. Test Setup..... 14
 - 3.3. EUT Configuration on Measurement..... 14
 - 3.4. Operating Condition of EUT..... 15
 - 3.5. Test Procedure..... 15
 - 3.6. Test Results..... 15
- 4. Harmonic Current Emission Test..... 20
 - 4.1. Test Standard..... 20
 - 4.2. Test Setup..... 20
 - 4.3. Operating Condition of EUT..... 20
 - 4.4. Test Results..... 20
- 5. Voltage Fluctuations & Flicker Test..... 23
 - 5.1. Test Standard..... 23
 - 5.2. Test Setup..... 23
 - 5.3. Operating Condition of EUT..... 23
 - 5.4. Test Results..... 23
- 6. Electrostatic Discharge Immunity Test..... 25
 - 6.1. Test Standard and Level..... 25
 - 6.2. Test Setup..... 25
 - 6.3. EUT Configuration on Measurement..... 25
 - 6.4. Operating Condition of EUT..... 25
 - 6.5. Test Procedure..... 26

6.6. Test Results..... 26

7. RF Field Strength Susceptibility Test..... 28

 7.1. Test Standard and Level..... 28

 7.2. Test Setup..... 28

 7.3. EUT Configuration on Measurement..... 29

 7.4. Operating Condition of EUT..... 29

 7.5. Test Procedure..... 29

 7.6. Measuring Results..... 29

8. Electrical Fast Transient/Burst Immunity Test..... 31

 8.1. Test Standard and Level..... 31

 8.2. Test Setup..... 31

 8.3. EUT Configuration on Measurement..... 31

 8.4. Operating Condition of EUT..... 31

 8.5. Test Procedure..... 32

 8.6. Test Results..... 32

9. Surge Immunity Test..... 34

 9.1. Test Standard and Level..... 34

 9.2. Test Setup..... 34

 9.3. EUT Configuration on Measurement..... 34

 9.4. Operating Condition of EUT..... 34

 9.5. Test Procedure..... 35

 9.6. Test Results..... 35

10. Injected Currents Susceptibility Test..... 37

 10.1. Test Standard and Level..... 37

 10.2. Test Setup..... 37

 10.3. EUT Configuration..... 37

 10.4. Operating Condition of EUT..... 37

 10.5. Test Procedure..... 38

 10.6. Test Results..... 38

11. Voltage Dips And Interruptions Test..... 40

 11.1. Test Standard and Level..... 40

 11.2. Test Setup..... 40

 11.3. EUT Configuration on Measurement..... 40

 11.4. Operating Condition of EUT..... 40

 11.5. Test Procedure..... 41

 11.6. Test Results..... 41

APPENDIX I -- TEST SETUP PHOTOGRAPH..... 43

APPENDIX II -- Photo documentation..... 48

TEST REPORT

Applicant : Shenzhen Greenergy Technology Co., Ltd.
Manufacturer : Shenzhen Greenergy Technology Co., Ltd.
Product Name : Portable Power Station Solid-state Lithium-ion Battery Pack
Model No. : SSLI2146 25.55V 84Ah 2146Wh
Trade Mark : N.A.
Rating(s) : DC Input: 29.4V 10A
DC Output: 12V 7A*2
AC Output: 1200W Pure Sine Wave 120V 60Hz
USB-C-1 Output: PD18W USB-C-2 Output: PD60W
USB-A Output :USB1/USB4:QC3.0
USB2/USB3:5V2.4A
Battery: 25.55V, 84000mAh

Test Standard(s) : **EN 55032: 2015+A11: 2020;**
EN IEC 61000-3-2: 2019;
EN 61000-3-3: 2013+A1:2019;
EN 55035: 2017+A11: 2020;
(IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4;
IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-11)

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 55032, EN IEC 61000-3-2, EN 61000-3-3, EN 55035 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt: Feb. 28, 2022

Date of Test: Feb. 28~Mar. 14, 2022

Prepared By:



(Yee Huang)

Approved & Authorized Signer:



(KingKong Jin)

1. General Information

1.1. Client Information

Applicant	:	Shenzhen Greenergy Technology Co., Ltd.
Address	:	Room 101, building a, No.10, Jinlong 2nd Road, Tongle community, Baolong street, Longgang District, Shenzhen City, Guangdong Province, P.R.China
Manufacturer	:	Shenzhen Greenergy Technology Co., Ltd.
Address	:	Room 101, building a, No.10, Jinlong 2nd Road, Tongle community, Baolong street, Longgang District, Shenzhen City, Guangdong Province, P.R.China
Factory	:	Shenzhen Greenergy Technology Co., Ltd.
Address	:	Room 101, building a, No.10, Jinlong 2nd Road, Tongle community, Baolong street, Longgang District, Shenzhen City, Guangdong Province, P.R.China

1.2. Description of Device (EUT)

Product Name	:	Portable Power Station Solid-state Lithium-ion Battery Pack	
Model No.	:	SSL12146 25.55V 84Ah 2146Wh	
Trade Mark	:	N.A.	
Test Power Supply	:	AC 230V, 50Hz / DC 25.5V	
Test Sample No.	:	1-1-1	
Product Description	:	Adapter:	Model: AP-PN180CH02940060 Input: 100-240V~50/60Hz 3A Output: 29.4V=6.0A 176.4W
Remark: (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			


1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

1.4. Description of Test Modes

Pretest Modes	Descriptions
Mode 1	Charging
Mode 2	Full Load

For Mode 1 Block Diagram of Test Setup



For Mode 2 Block Diagram of Test Setup



1.5. Test Summary

Test Items	Test Modes	Status
Power Line Conducted Emission Test (150KHz To 30MHz)	Mode 1	P
Radiated Emission Test (30MHz To 1000MHz)	All Mode	P
Harmonic Current Test	Mode 1	P
Voltage Fluctuations and Flicker Test	Mode 1	P
Electrostatic Discharge immunity Test	Mode 1	P
RF Field Strength susceptibility Test	Mode 1	P
Electrical Fast Transient/Burst Immunity Test	Mode 1	P
Surge Immunity Test	Mode 1	P
Injected Currents Susceptibility Test	Mode 1	P
Magnetic Field Susceptibility Test	/	N
Voltage Dips and Interruptions Test	Mode 1	P
P) Indicates "PASS".		
N) Indicates "Not applicable".		

1.6. Test Equipment List

Conducted Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 22, 2021	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040D T001	Jul 05, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
2.	Pre-amplifier	Schwarzbeck	BBV-9745	9745-075	Oct. 22, 2021	1 Year
3.	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	Oct. 22, 2021	2 Year
4.	Software Name EZ-EMC	Ferrari Technology	EMEC-3A1	N/A	N/A	N/A

Harmonic and Flicker Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Programmable AC Power source	IVYTECH	APS-5005A	632734	Oct. 22, 2021	1 Year
2.	Harmonic and Flicker Analyzer	EMC-PARTNER	HMONICS 1000-1P	164	Oct. 22, 2021	1 Year
3.	Harmonics-1000	N/A	Ed.3.0+4.0	N.A	N/A	N/A

Electrostatic Discharge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Simulators	3Ctest	EDS-30T	ES0131505	Oct. 22, 2021	1 Year

Electrical Fast Transient/Burst Immunity Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Generator	TESEQ	NSG 3060	1480	Oct. 22, 2021	1 Year
2.	CDN	TESEQ	CDN 3061	1408	Oct. 22, 2021	1 Year
3.	EFT-Clamp	PRIMA	EFT-Clamp	/	Oct. 22, 2021	1 Year

R/S Immunity Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	Agilent	N5182A	MY4818065 6	Oct. 22, 2021	1 Year
2.	Amplifier	Micotoop	MPA-80-100 0-250	MPA190309 6	Oct. 22, 2021	1 Year
3.	Amplifier	Micotoop	MPA-1000-6 000-100	MPA190312 2	Oct. 22, 2021	1 Year
4.	Log-Periodic Antenna	Schwarzbeck	VULP9118E	00992	N/A	N/A
5.	Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
6.	Power Sensor	Agilent	E9301A	MY4149890 6	Oct. 22, 2021	1 Year
7.	Power Sensor	Agilent	E9301A	MY4149808 8	Oct. 22, 2021	1 Year
8.	Power Meter	Agilent	E4419B	GB4020290 9	Oct. 22, 2021	1 Year
9.	Electric field Probe	Narda	EP 601	811ZX10351	Oct. 22, 2021	1 Year
10.	RS Test software	EMtrace	EM 3	V1.1.7	N/A	N/A

Surge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Combined Wave Lightning Surge Simulator	3Ctest	CCS600	ES3771702	Jul. 05, 2021	1 Year
2.	Three Phase Power Coupling Network	3Ctest	SEP69100 T	ES0801757	Jul. 05, 2021	1 Year
3.	Telecom port surge generator	PMI	TW101	190411	May 13, 2021	1 Year

Injected Currents Susceptibility Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	C/S Conducted Immunity Test System	FRANKONIA	CIT-10	126A1196/20 12	Oct. 22, 2021	1 Year
2.	CDN	FRANKONIA	CDN - M2+ M3	A2210178/20 12	Oct. 22, 2021	1 Year
3.	6dB Attenuator	FRANKONIA	DAM 26W	1172202	Oct. 22, 2021	1 Year
4.	CIT-10	FRANKONIA	Version1.1.7	N/A	N/A	N/A
5.	EM-Clamp	FRANKONIA	EMCL-20	18101728-01 03	May 17,2021	1 Year

Voltage Dips and Interruptions Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	CYCLE SAG Simulator	PRIMA	DRP61011A G	PR12046234	Oct. 22, 2021	1 Year

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518128.

1.8. EMS Performance Criteria

- √ A: Normal performance within the specification limits
- √ B: Temporary degradation or loss of function or performance which is self-recoverable
- √ C: Temporary degradation or loss of function or performance which requires operator intervention or system reset
- √ D: Degradation or loss of function which is not recoverable due to damage of equipment (components) or software, or loss of data

Note: The manufacturer's specification may define effects on the EUT which may be considered insignificant, and therefore acceptable.

This classification may be used as a guide in formulating performance criteria, by committees responsible for generic, product and product-family standards, or as a framework for the agreement on performance criteria between the manufacturer and the purchaser, for example where no suitable generic, product or product-family standard exists.



2. Power Line Conducted Emission Test

2.1. Test Standard and Limit


Test Standard	EN 55032
---------------	----------

Limits for conducted emissions

Test Limit	Frequency (MHz)	At mains terminals (dB μ V)	
		Quasi-peak Level	Average Level
	0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
	0.50 ~ 5.00	56.0	46.0
	5.00 ~ 30.00	60.0	50.0

Remark: (1) The lower limit shall apply at the transition frequencies.
(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

2.2. Test Setup

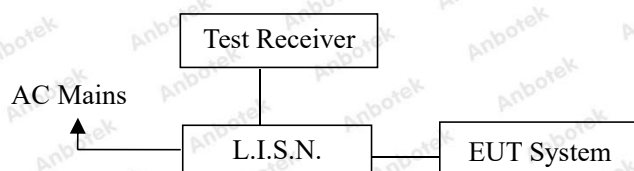

2.3. EUT Configuration on Measurement

The following equipments are installed on conducted emission measurement to meet EN 55032 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

2.4. Operating Condition of EUT

2.4.1. Setup the EUT as shown in Section 2.2.

2.4.2. Turn on the power of all equipments.

2.4.3. Let the EUT work in test mode and measure it.

2.5. Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network(L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN55032 regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCI) is set at 9kHz in 150kHz~30MHz.

The frequency range from 150kHz to 30MHz is investigated for AC mains.

All the test results are listed in Section 2.6.


2.6. Test Results

PASS

The test curves are shown in the following pages.

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Test Specification: AC 230V, 50Hz
 Comment: Live Line
 Temp.: 23.1°C Hum.: 49%

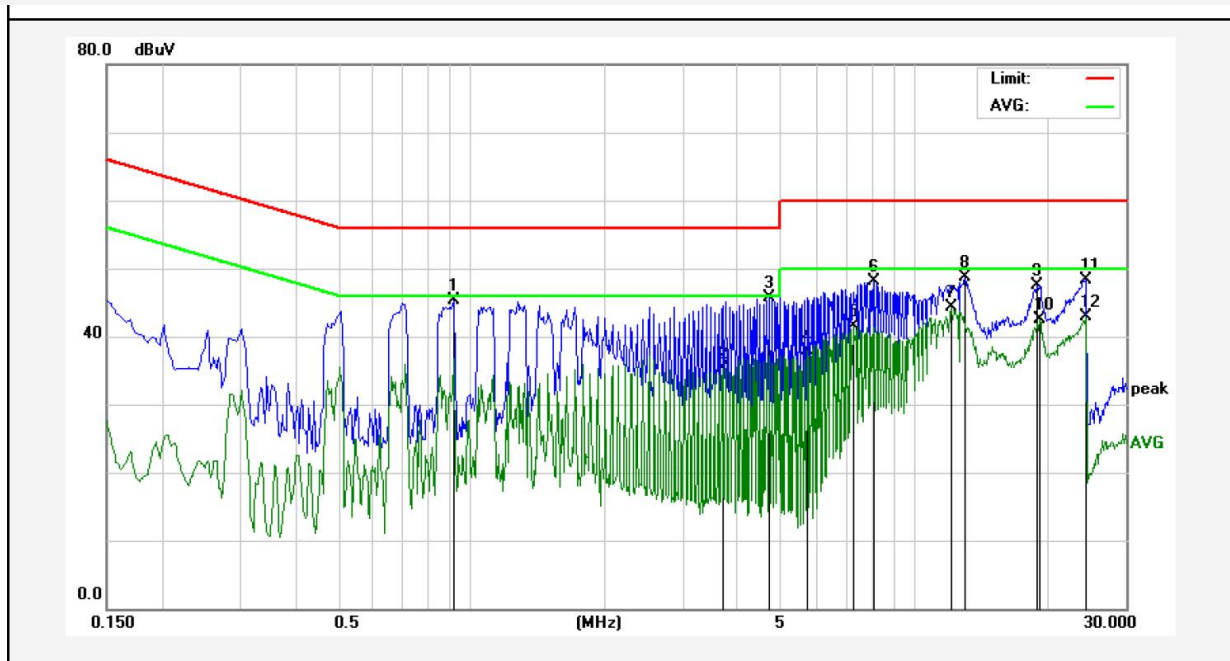


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.9100	45.12	0.15	45.27	56.00	-10.73	QP	
2	3.6819	35.24	0.12	35.36	46.00	-10.64	AVG	
3	4.7019	45.56	0.11	45.67	56.00	-10.33	QP	
4	5.7217	37.77	0.11	37.88	50.00	-12.12	AVG	
5	7.2538	41.44	0.11	41.55	50.00	-8.45	AVG	
6	8.1295	47.96	0.12	48.08	60.00	-11.92	QP	
7	12.0699	44.08	0.14	44.22	50.00	-5.78	AVG	
8	13.0175	48.49	0.15	48.64	60.00	-11.36	QP	
9	18.9338	47.40	0.19	47.59	60.00	-12.41	QP	
10	19.1539	42.28	0.19	42.47	50.00	-7.53	AVG	
11	24.3415	48.09	0.17	48.26	60.00	-11.74	QP	
12	24.3415	42.69	0.17	42.86	50.00	-7.14	AVG	

Note: Result=Reading+Factor Over Limit=Result-Limit

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Test Specification: AC 230V, 50Hz
 Comment: Neutral Line
 Temp.: 23.1°C Hum.: 49%

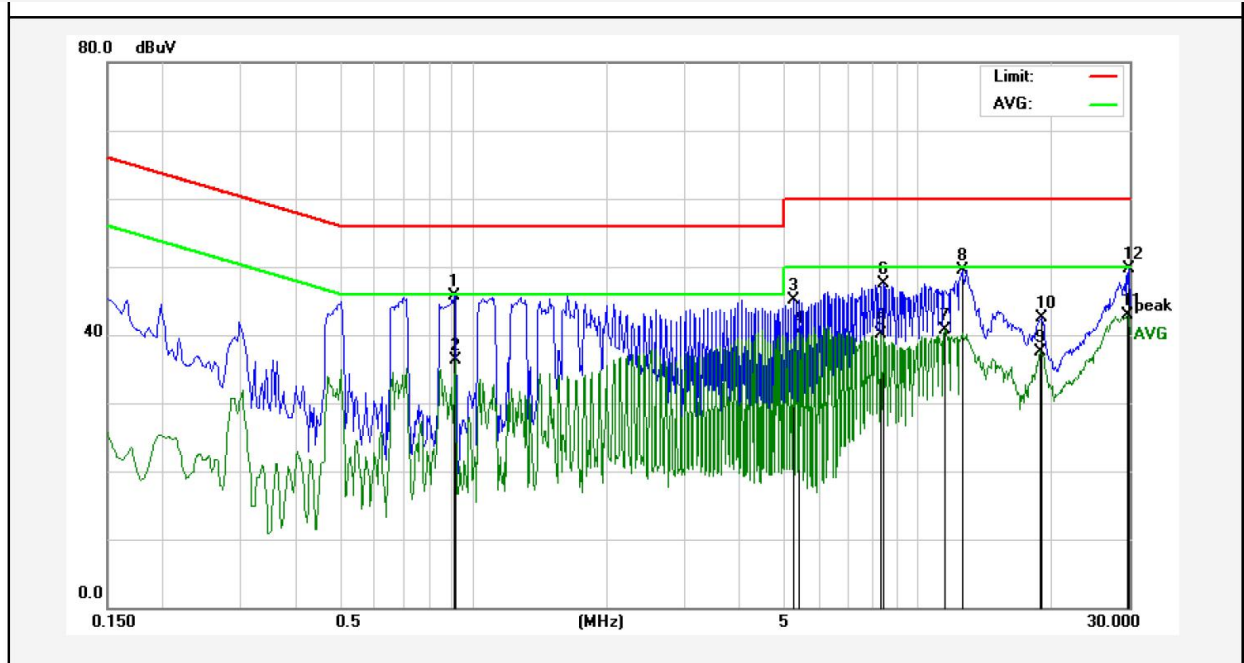

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.9060	45.64	0.15	45.79	56.00	-10.21	QP	
2	0.9100	36.25	0.15	36.40	46.00	-9.60	AVG	
3	5.2618	45.03	0.11	45.14	60.00	-14.86	QP	
4	5.4058	40.14	0.11	40.25	50.00	-9.75	AVG	
5	8.3139	40.00	0.12	40.12	50.00	-9.88	AVG	
6	8.3856	47.38	0.12	47.50	60.00	-12.50	QP	
7	11.5137	40.60	0.14	40.74	50.00	-9.26	AVG	
8	12.6059	49.29	0.15	49.44	60.00	-10.56	QP	
9	18.8699	37.41	0.19	37.60	50.00	-12.40	AVG	
10	19.0899	42.26	0.19	42.45	60.00	-17.55	QP	
11	29.8180	42.55	0.36	42.91	50.00	-7.09	AVG	
12	29.8900	49.25	0.37	49.62	60.00	-10.38	QP	

Note: Result=Reading+Factor Over Limit=Result-Limit

3. Radiated Emission Test

3.1. Test Standard and Limit


Test Standard	EN 55032
---------------	----------

Radiated Emission Test Limit

Test Limit	Frequency (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dBμV/m)
	30 ~ 230	3	40
	230 ~ 1000	3	47

Remark: (1)The smaller limit shall apply at the combination point between two frequency bands.
 (2) Distancer efers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.
 (3) $3M \text{ Limit} = 10M \text{ Limit} + k$ $k = 20 \log(D1/D2) = 10$
 $3M \text{ Limit} = 10M \text{ Limit} + 10$
 (D1= 10M D2=3M)

3.2. Test Setup

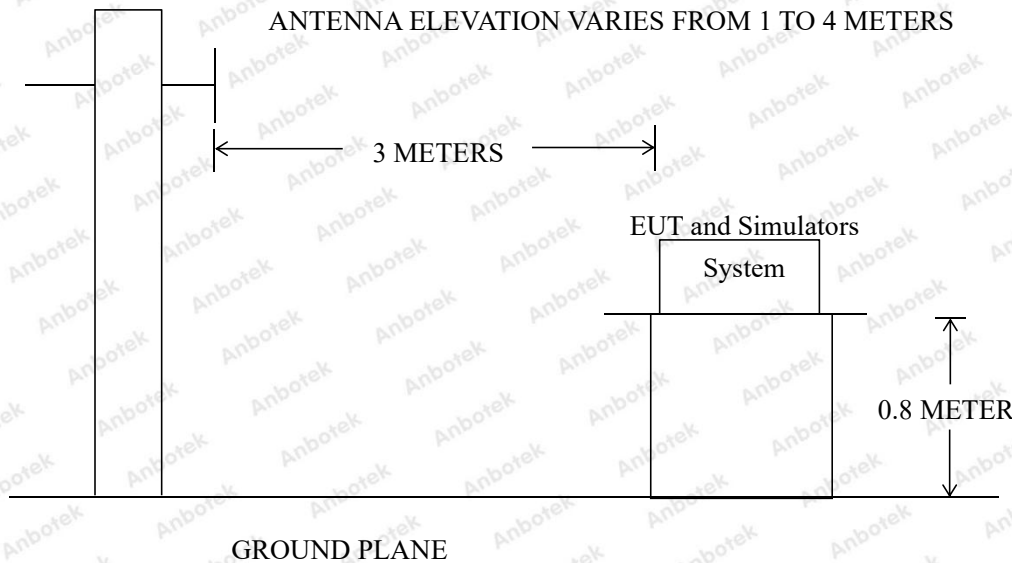

3.3. EUT Configuration on Measurement

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

3.4. Operating Condition of EUT

3.4.1. Setup the EUT as shown in Section 3.2.

3.4.2. Turn on the power of all equipments.

3.4.3. Let the EUT work in test mode and measure it.

3.5. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCI) is set at 120kHz.

The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 3.6.


3.6. Test Results

PASS

The frequency range from 30MHz to 1000MHz is investigated.

The test curves are shown in the following pages.


Test item: Radiation Test **Polarization:** Horizontal
Standard: (RE)EN55032 **Power Source:** AC 230V, 50Hz
Distance: 3m **Temp.(°C)/Hum.(%RH):** 22.7(°C)/49%RH
Test Mode: Charging

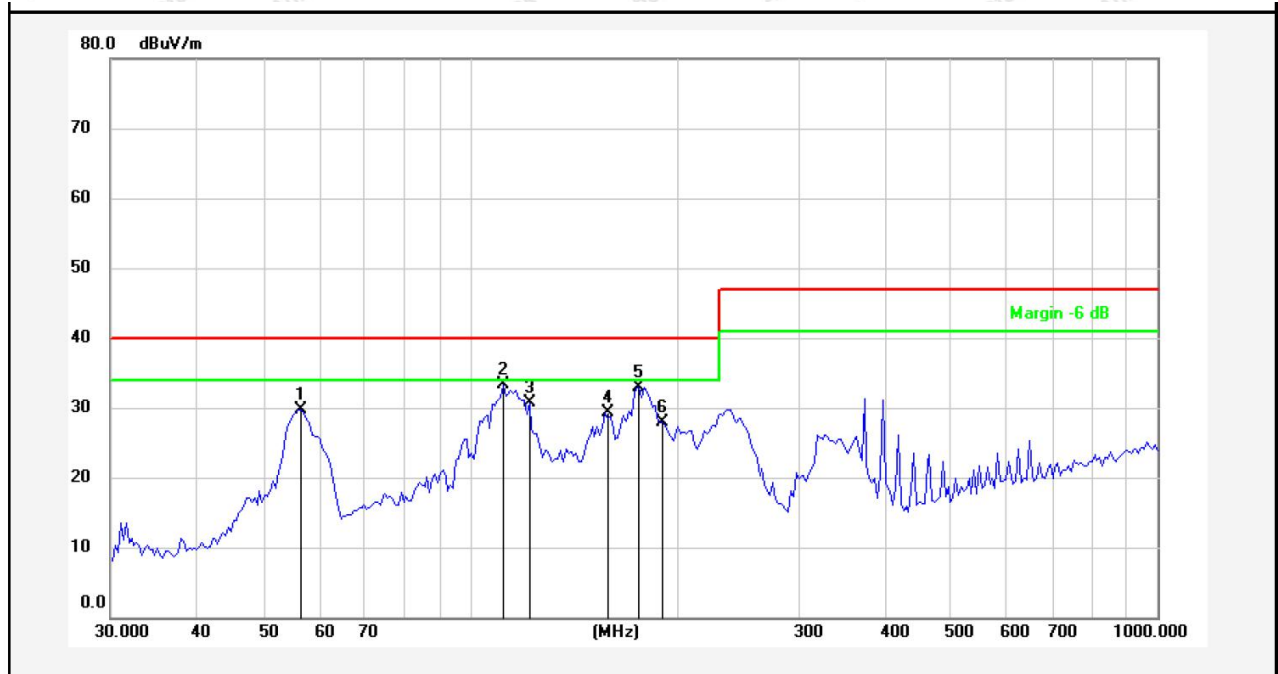

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	56.8913	47.14	-17.53	29.61	40.00	-10.39	QP			
2	111.7378	51.80	-18.47	33.33	40.00	-6.67	QP			
3	121.9753	50.42	-19.81	30.61	40.00	-9.39	QP			
4	157.2829	50.06	-20.69	29.37	40.00	-10.63	QP			
5	176.2684	52.51	-19.57	32.94	40.00	-7.06	QP			
6	190.7390	46.71	-18.72	27.99	40.00	-12.01	QP			

Note: **Result=Reading+Factor** **Over Limit=Result-Limit**


Test item:	Radiation Test	Polarization:	Vertical
Standard:	(RE)EN55032	Power Source:	AC 230V, 50Hz
Distance:	3m	Temp.(°C)/Hum.(%RH):	22.7(°C)/49%RH
Test Mode:	Charging		

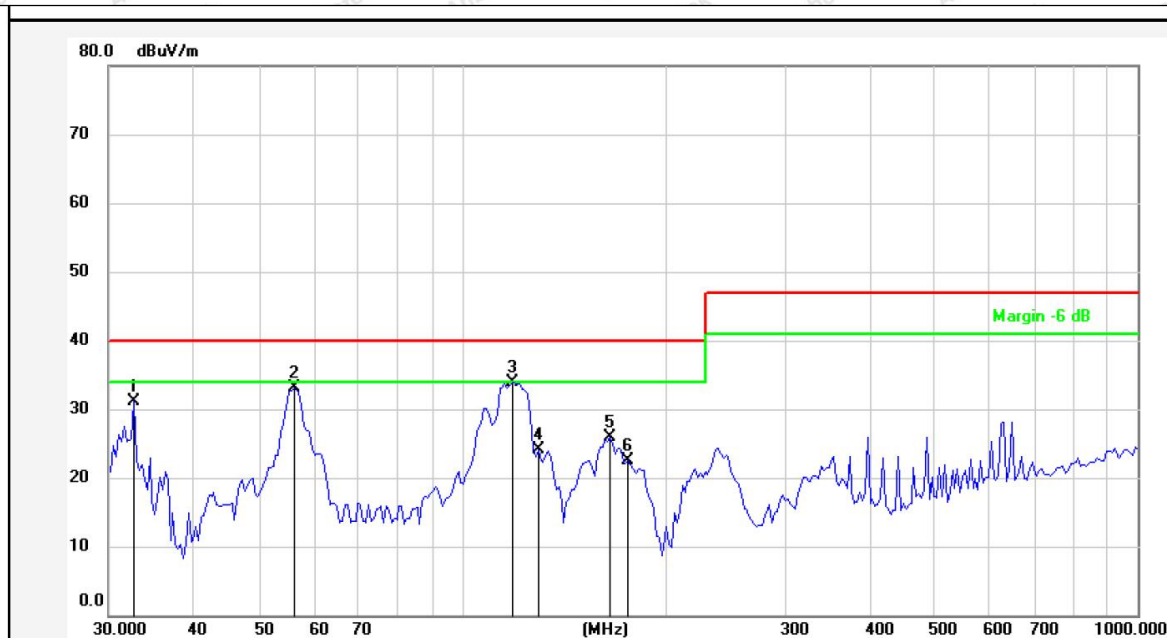

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	32.7486	49.15	-18.05	31.10	40.00	-8.90	QP			
2	56.3947	50.59	-17.51	33.08	40.00	-6.92	QP			
3	118.8093	53.33	-19.40	33.93	40.00	-6.07	QP			
4	129.6948	44.80	-20.77	24.03	40.00	-15.97	QP			
5	165.7768	46.09	-20.19	25.90	40.00	-14.10	QP			
6	176.2684	42.08	-19.57	22.51	40.00	-17.49	QP			

Note: **Result=Reading+Factor** **Over Limit=Result-Limit**


Test item:	Radiation Test	Polarization:	Horizontal
Standard:	(RE)EN55032	Power Source:	DC 25.5V
Distance:	3m	Temp.(°C)/Hum.(%RH):	22.7(°C)/49%RH
Test Mode:	Full Load		

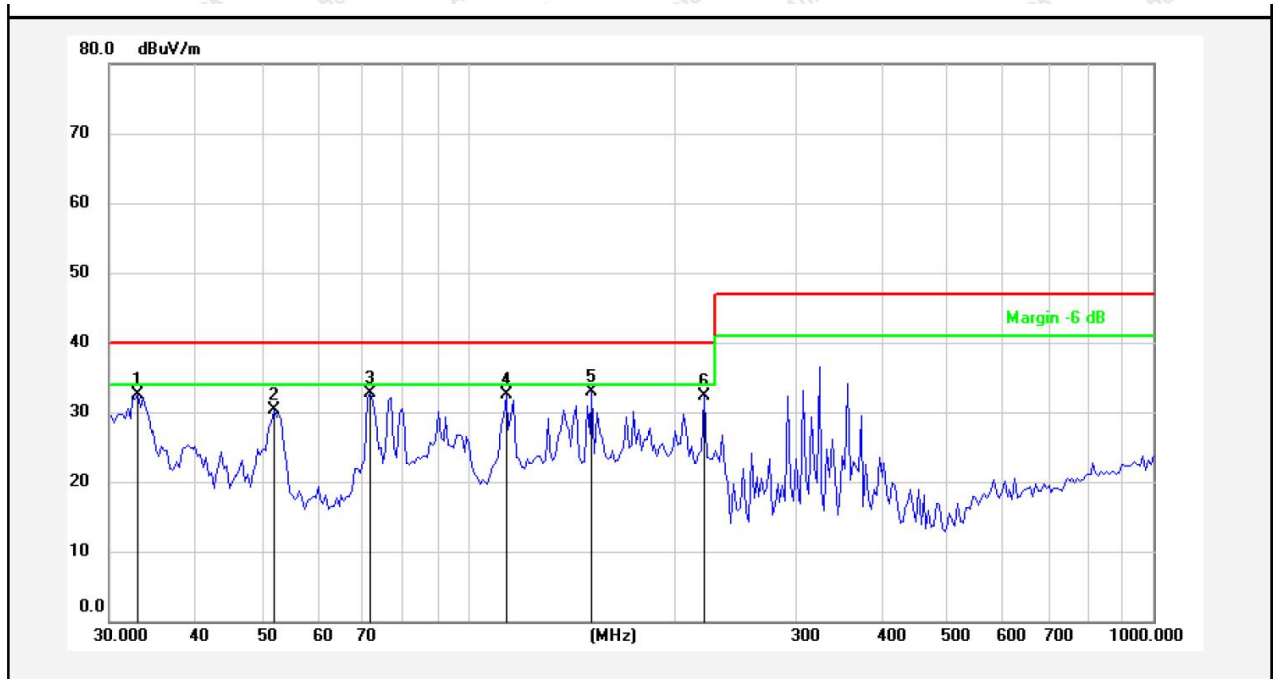

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	33.0369	50.45	-18.04	32.41	40.00	-7.59	QP			
2	52.1163	47.62	-17.29	30.33	40.00	-9.67	QP			
3	72.0841	54.41	-21.66	32.75	40.00	-7.25	QP			
4	113.7142	51.21	-18.74	32.47	40.00	-7.53	QP			
5	151.8632	53.89	-21.01	32.88	40.00	-7.12	QP			
6	221.3919	49.52	-17.27	32.25	40.00	-7.75	QP			

Note: **Result=Reading+Factor** **Over Limit=Result-Limit**

Test item:	Radiation Test	Polarization:	Vertical
Standard:	(RE)EN55032	Power Source:	DC 25.5V
Distance:	3m	Temp.(°C)/Hum.(%RH):	22.7(°C)/49%RH
Test Mode:	Full Load		

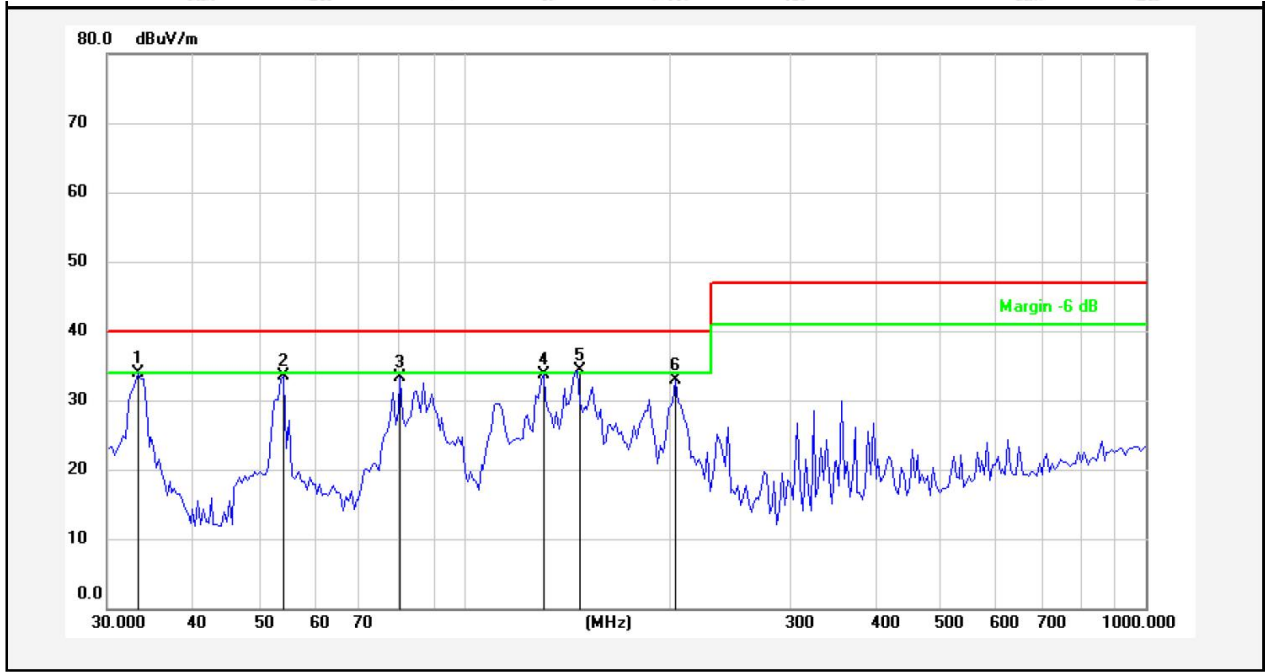

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	33.3278	51.94	-18.04	33.90	40.00	-6.10	QP			
2	54.4515	50.96	-17.41	33.55	40.00	-6.45	QP			
3	80.7857	54.80	-21.42	33.38	40.00	-6.62	QP			
4	130.8369	54.57	-20.86	33.71	40.00	-6.29	QP			
5	146.6304	55.57	-21.20	34.37	40.00	-5.63	QP			
6	204.5961	50.93	-17.99	32.94	40.00	-7.06	QP			


Note: **Result=Reading+Factor** **Over Limit=Result-Limit**

4. Harmonic Current Emission Test

4.1. Test Standard

Test Standard	EN IEC 61000-3-2
---------------	------------------

4.2. Test Setup

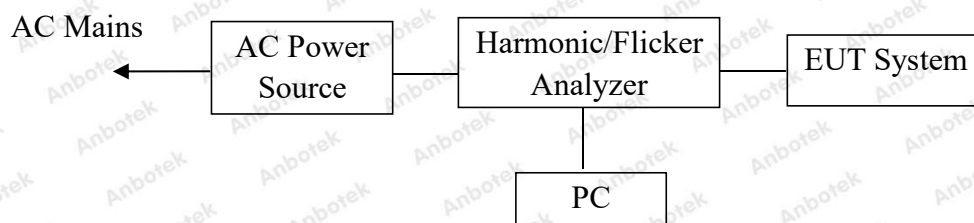


4.3. Operating Condition of EUT

- 4.3.1. Setup the EUT as shown on Section 4.2.
- 4.3.2. Turn on the power of all equipments.
- 4.3.3. After that, let the EUT work in test mode measure it.

4.4. Test Results

Harmonic Current Test Result Summary (Run time)

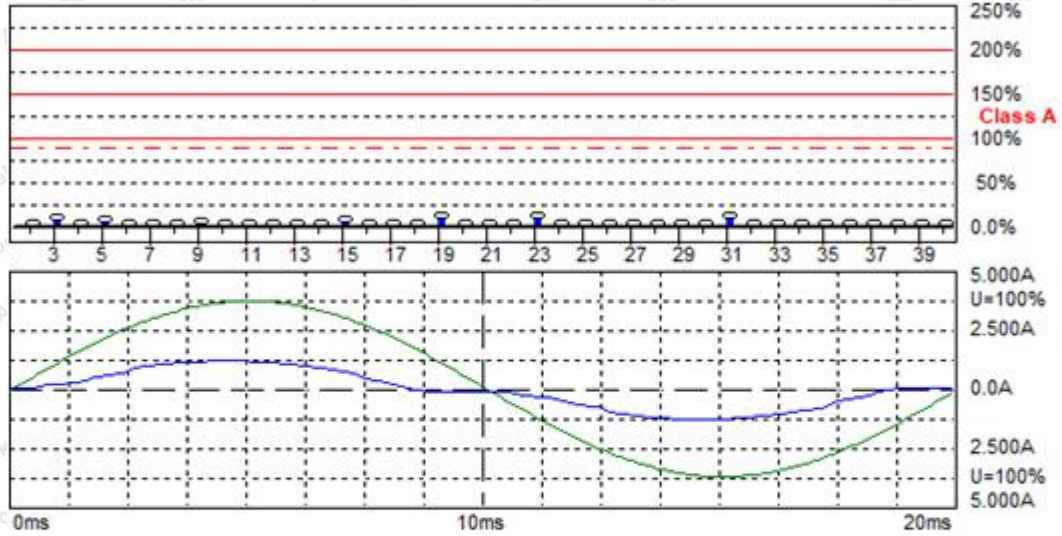

Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (EN60555-2)

Urms =	229.5 V	P =	175.1 W	THC =	0.169 A	Range:	5 A
Irms =	0.793 A	pf =	0.962			V-nom:	230 V

Test aborted, Result: PASSED

HAR-1000 EMC Partner

Full Bar : Actual Values
Empty Bar : Maximum Values
Blue : Current , Green : Voltage , Red : Failed

Harmonic Current Test Result Summary (Run time)

Urms = 229.5V Freq = 49.987 Range: 5 A
 Irms = 0.793A Ipk = 1.289A cf = 1.625
 P = 175.1W S = 182.1VA pf = 0.962
 THDi = 21.8 % THDu = 0.20 % Class A

Test - Time : 3min (100 %)

Test aborted, Result: PASSED


Order	Freq. Status [Hz]	Iavg [A]	Iavg%L [%]	Irms [A]	Irms% [%]	Irms%L [%]	Imax [A]	Imax%L [%]	Limit [A]
1	50	0.7755		0.7742	97.577		0.7791		
2	100	0.0000	0.0000	0.0012	0.1538	0.1130	0.0009	0.0848	1.0800
3	150	0.1540	6.6978	0.1538	19.385	6.6873	0.1547	6.7271	2.3000
4	200	0.0000	0.0000	0.0003	0.0385	0.0710	0.0003	0.0710	0.4300
5	250	0.0638	5.5987	0.0638	8.0385	5.5949	0.0641	5.6217	1.1400
6	300	0.0000	0.0000	0.0003	0.0385	0.1017	0.0003	0.1017	0.3000
7	350	0.0107	1.3872	0.0107	1.3462	1.3872	0.0107	1.3872	0.7700
8	400	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.2300
9	450	0.0110	2.7520	0.0110	1.3846	2.7466	0.0113	2.8229	0.4000
10	500	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1840
11	550	0.0067	2.0345	0.0067	0.8462	2.0345	0.0067	2.0345	0.3300
12	600	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1533
13	650	0.0000	0.0000	0.0018	0.2308	0.8719	0.0018	0.8719	0.2100
14	700	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1314
15	750	0.0064	4.2725	0.0064	0.8077	4.2725	0.0064	4.2725	0.1500
16	800	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1150
17	850	0.0000	0.0000	0.0046	0.5769	3.4587	0.0046	3.4587	0.1324
18	900	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.1022
19	950	0.0126	10.603	0.0125	1.5769	10.566	0.0128	10.824	0.1184
20	1000	0.0000	0.0000	0.0003	0.0385	0.3317	0.0003	0.3317	0.0920
21	1050	0.0000	0.0000	0.0034	0.4231	3.1331	0.0034	3.1331	0.1071
22	1100	0.0000	0.0000	0.0003	0.0385	0.3649	0.0003	0.3649	0.0836
23	1150	0.0089	9.0468	0.0089	1.1154	9.0468	0.0089	9.0468	0.0978
24	1200	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0767
25	1250	0.0000	0.0000	0.0040	0.5000	4.4081	0.0037	4.0690	0.0900
26	1300	0.0000	0.0000	0.0003	0.0385	0.4312	0.0003	0.4312	0.0708
27	1350	0.0000	0.0000	0.0040	0.5000	4.7607	0.0043	5.1270	0.0833
28	1400	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0657
29	1450	0.0000	0.0000	0.0003	0.0385	0.3933	0.0006	0.7867	0.0776
30	1500	0.0000	0.0000	0.0003	0.0385	0.4976	0.0000	0.0000	0.0613
31	1550	0.0058	7.9888	0.0058	0.7308	7.9888	0.0058	7.9888	0.0726
32	1600	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0575
33	1650	0.0000	0.0000	0.0015	0.1923	2.2380	0.0015	2.2380	0.0682
34	1700	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0541
35	1750	0.0000	0.0000	0.0034	0.4231	5.2219	0.0034	5.2219	0.0643
36	1800	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0511
37	1850	0.0000	0.0000	0.0018	0.2308	3.0111	0.0018	3.0111	0.0608
38	1900	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0484
39	1950	0.0000	0.0000	0.0031	0.3846	5.2897	0.0034	5.8187	0.0577
40	2000	0.0000	0.0000	0.0003	0.0385	0.6634	0.0003	0.6634	0.0460

5. Voltage Fluctuations & Flicker Test

5.1. Test Standard

Test Standard	EN 61000-3-3
---------------	--------------

5.2. Test Setup

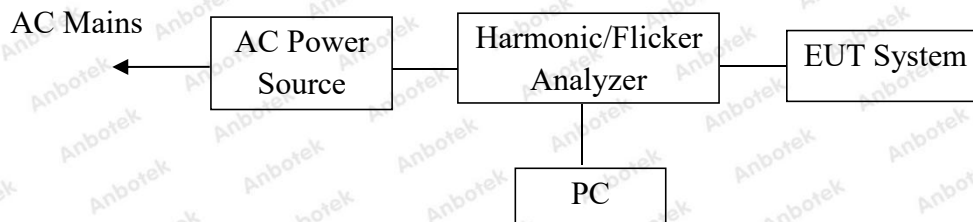

5.3. Operating Condition of EUT

5.3.1. Setup the EUT as shown on Section 5.2.

5.3.2. Turn on the power of all equipments.


5.3.3. After that, let the EUT work in test mode measure it.

5.4. Test Results

PASS

The test curves are shown in the following pages.

Flicker Test Summary (Run time)

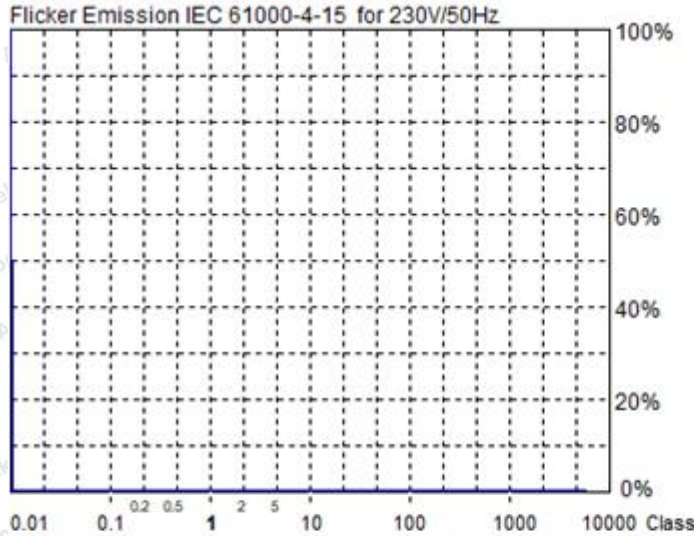

Actual Flicker (Fli):	0.00
Short-term Flicker (Pst):	0.07
Limit (Pst):	1.00
Long-term Flicker (Plt):	0.00
Limit (Plt):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.00%
Limit (dc):	3.00%
Tmax 3.00% (dt):	0.00ms
Limit (dt>Lim):	200ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3

Urms = 229.3 V P = 173.5 W
Irms = 0.784 A pf = 0.965

Range: 2 A
V-nom: 230 V

Test aborted, Result: PASSED

HAR-1000 EMC Partner

- Full Bar : Actual Values
- Empty Bar : Maximum Values
- Circles : Average Values
- Blue : Current , Green : Voltage , Red : Failed

Urms = 229.3V Freq = 49.987 Range: 2 A
Irms = 0.784A Ipk = 1.239A cf = 1.580
P = 173.5W S = 179.8VA pf = 0.965

Test - Time : 10 x 1min = 10min (100 %)

LIN (Line Impedance Network) : L: 0.24ohm +j0.15ohm N: 0.16ohm +j0.10ohm

Limits : Plt : 0.65 Pst : 1.00
dmax : 4.00 % dc : 3.00 %
dtLim: 3.00 % dt>Lim: 200ms

Test aborted, Result: PASSED

	dmax	dc	dt>Lim
	[%]	[%]	[ms]
1	0.000	0.000	0.000

6. Electrostatic Discharge Immunity Test


6.1. Test Standard and Level

Test Standard:	EN 55035 (IEC 61000-4-2)
Performance Criterion:	B
Severity Level: 3 / Air Discharge: ± 8 kV, Level: 2 / Contact Discharge: ± 4 kV	

Test Level

Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X.	Special	Special

6.2. Test Setup

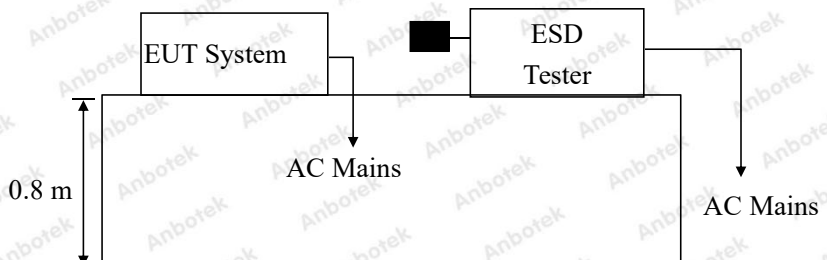

6.3. EUT Configuration on Measurement

The following equipments are installed on electrostatic discharge immunity measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

6.4. Operating Condition of EUT

- 6.4.1. Setup the EUT as shown on Section 6.2.
- 6.4.2. Turn on the power of all equipments.
- 6.4.3. After that, let the EUT work in test mode measure it.

6.5. Test Procedure

6.5.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

6.5.2. Contact Discharge:

All the procedure shall be same as Section 7.5.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

6.5.3. Indirect discharge for horizontal coupling plane

At least 50 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

6.5.4. Indirect discharge for vertical coupling plane

At least 50 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m × 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

6.6. Test Results

PASS

Please refer to the following page.

Electrostatic Discharge Test Results

Air discharge :	±8.0kV	Temperature :	23.3℃
Contact discharge :	±4.0kV	Humidity :	50%
Power Supply :	AC 230V, 50Hz	Expert conclusion :	A
Number of discharge :	10	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Location		Kind A-Air Discharge C-Contact Discharge	Result
Screen	4 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
AC Port	4 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Light	4 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
DC Port	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
USB Port	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Type-C Port	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Slot	4 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Metal	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Button	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
HCP	4 points	C	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the front	4 points	C	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the rear	4 points	C	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the left	4 points	C	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the right	4 points	C	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D

Remark: Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).



7. RF Field Strength Susceptibility Test


7.1. Test Standard and Level

Test Standard:	EN 55035 (IEC 61000-4-3)
Required Performance:	A
Frequency Range:	80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz
Field Strength:	3 V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	1.5 m
Dwell Time:	at least 0.5s

Test Level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

7.2. Test Setup

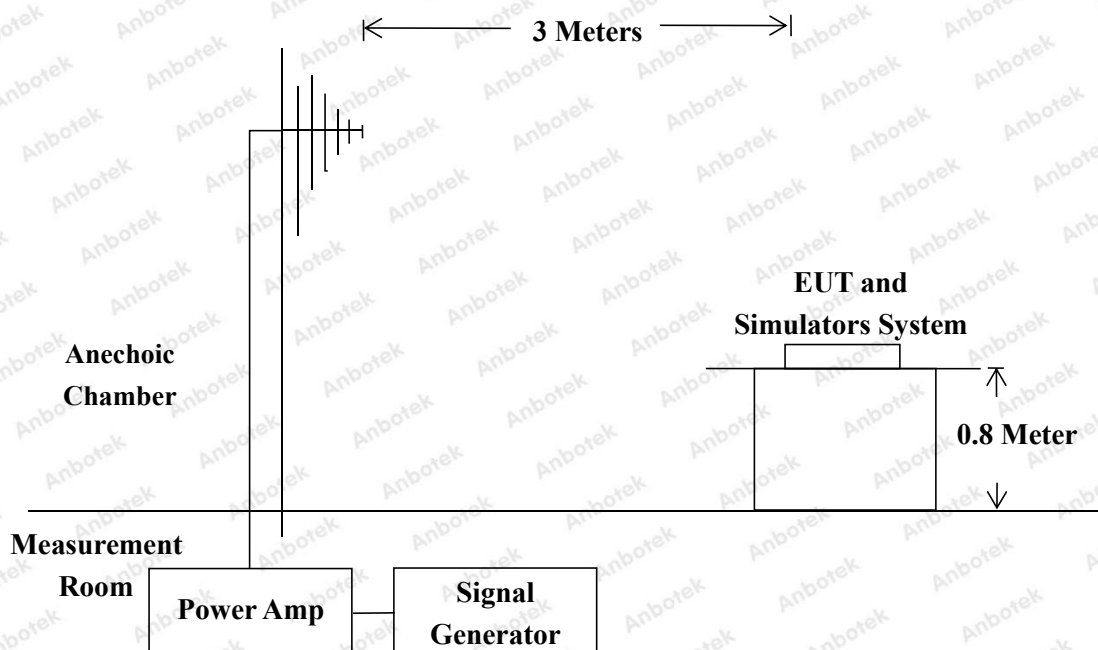

7.3. EUT Configuration on Measurement

The following equipments are installed on RF Field Strength susceptibility Measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT as shown on Section 7.2.

7.4.2. Turn on the power of all equipments.

7.4.3. After that, let the EUT work in test mode measure it.

7.5. Test Procedure

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber. The testing distance from antenna to the EUT was 3 meters.

- 1) 80 MHz to 1000 MHz the field strength level was 3V/m, 1800MHz, 2600MHz, 3500MHz, 5000MHz the field strength level was 3V/m.
- 2) The frequency range is swept from 80 MHz to 1000 MHz with the signal 80% amplitude modulated with a 1kHz sine wave.
- 3) The frequency range is swept from 1800MHz, 2600MHz, 3500MHz, 5000MHz with the signal 80% amplitude modulated with a 1kHz sine wave.
- 4) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond, but shall in no case be less than 0.5s.
- 5) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

7.6. Measuring Results

PASS

Please refer to the following page.

RF Field Strength Susceptibility Test Results

Field Strength :	3V/m	Temperature :	23.8°C
Expert conclusion :	A	Humidity :	53%
Power Supply :	AC 230V, 50Hz	Test Result :	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Dwell Time:	1s		

Frequency Range	Antenna Polarity	R.F. Field Strength	Azimuth	Result
80MHz~1000MHz	H / V	3 V/m (rms)	Front	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
			Rear	
			Left	
			Right	
1800MHz 2600MHz 3500MHz 5000MHz	H / V	3 V/m (rms)	Front	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
			Rear	
			Left	
			Right	

8. Electrical Fast Transient/Burst Immunity Test


8.1. Test Standard and Level

Test Standard:	EN 55035 (IEC 61000-4-4)
Performance criterion:	B
Severity Level 2: 1.00kV	

Test Level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.50 kV	0.25 kV
2.	1.00 kV	0.50 kV
3.	2.00 kV	1.00 kV
4.	4.00 kV	2.00 kV
X.	Special	Special

8.2. Test Setup

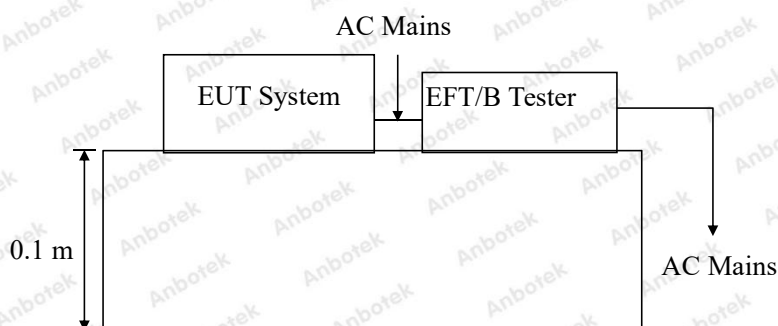

8.3. EUT Configuration on Measurement

The following equipments are installed on electrical fast transient/burst immunity measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT as shown in Section 8.2.

8.4.2. Turn on the power of all equipments.

8.4.3. Let the EUT work in test mode and measure it.

8.5. Test Procedure

The EUT is put on the table which is 0.1 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

8.5.1. For input and output AC power ports:

The EUT is connected to the Power mains by using a coupling device which couples the EFT interference signal to AC Power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

8.5.2. For signal lines and control lines ports:

Select tests based on product characteristics.

8.5.3. For DC output line ports:

Select tests based on product characteristics.

8.6. Test Results

PASS

Please refer to the following page.

Electrical Fast Transient/Burst Test Results

Ambient Condition : 23.3°C / 50% RH		Expert conclusion : A	
Power Supply .: AC 230V, 50Hz		Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Inject Line : AC Mains		Inject Method: Direct	Inject Time(s): 120
Line	Polarity	Test Voltage (kV)	Result
AC Line	±	1.00kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
DC Line			
Signal Line			

9. Surge Immunity Test


9.1. Test Standard and Level

Test Standard:	EN 55035 (IEC 61000-4-5)
Performance criterion:	B
Severity Level 2, Line to Line: 1.0kV	

Test Level

Severity Level	Open-Circuit Test Voltage (kV)
1.	0.5
2.	1.0
3.	2.0
4.	4.0
X.	Special

9.2. Test Setup

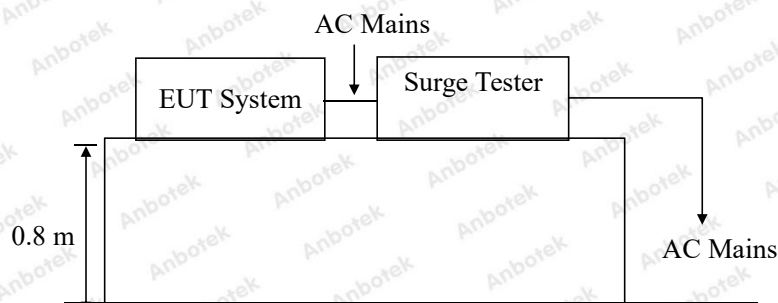

9.3. EUT Configuration on Measurement

The following equipments are installed on surge immunity measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT as shown in Section 9.2.

9.4.2. Turn on the power of all equipments.

9.4.3. Let the EUT work in test mode and measure it.

9.5. Test Procedure

9.5.1. Set up the EUT and test generator as shown on Section 9.2.

9.5.2. For line to line coupling mode, provide a 1.0 kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.

9.5.3. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.

9.5.4. Different phase angles are done individually.

9.5.5. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

9.6. Test Results

PASS

Please refer to the following page.

Surge Immunity Test Results

Humidity :	50%	Temperature :	23.3℃		
Power Supply :	AC 230V, 50Hz	Expert conclusion:	A		
Test Result :	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail				
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (kV)	Result
L-N	+	<input type="checkbox"/> 0° <input checked="" type="checkbox"/> 90° <input type="checkbox"/> 180° <input type="checkbox"/> 270°	5	1.0kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
L-N	-	<input type="checkbox"/> 0° <input type="checkbox"/> 90° <input type="checkbox"/> 180° <input checked="" type="checkbox"/> 270°	5	1.0kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
L-GND					
L-GND					
N-GND					
N-GND					

10. Injected Currents Susceptibility Test


10.1. Test Standard and Level

Test Standard	EN 55035 (IEC 61000-4-6)
Performance criterion	A

Test Level

Level	Field Strength V
1.	1
2.	3
3.	10
X.	Special

10.2. Test Setup

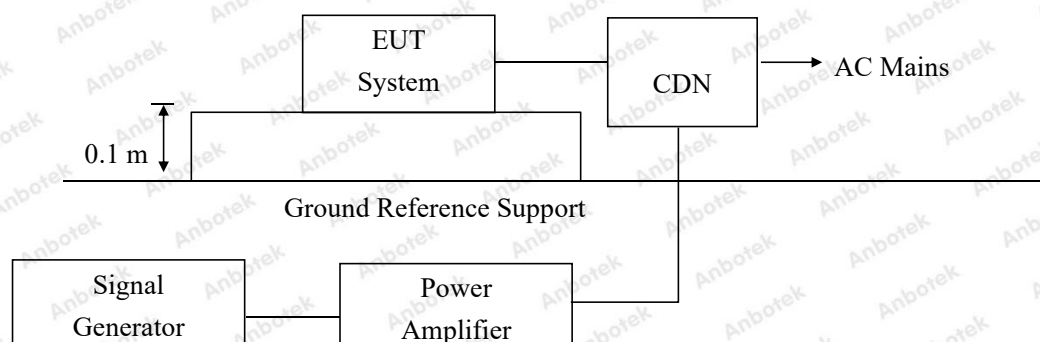

10.3. EUT Configuration

The following equipments are installed on currents susceptibility measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

10.4. Operating Condition of EUT

- 10.4.1. Setup the EUT as shown in Section 10.2.
- 10.4.2. Turn on the power of all equipments.
- 10.4.3. Let the EUT work in test mode and measure it.

10.5. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 10.2.
- 2) Let the EUT work in test mode and measure it.
- 3) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 10MHz using 3V signal level, 10MHz to 30MHz using 3V to 1V signal level, 30MHz to 80MHz using 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

10.5.1. For signal lines and control lines ports:

Select tests based on product characteristics.

10.5.2. For DC output line ports:

Select tests based on product characteristics.

10.6. Test Results

PASS

Please refer to the following page.



Injected Currents Susceptibility Test Results

Humidity : 49%		Temperature : 23.0°C	
Power Supply : AC 230V, 50Hz		Expert conclusion: A	
Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail			
Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Result
0.15 ~ 10	AC Mains	3V	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
10 ~ 30	AC Mains	3V to 1V	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
30 ~ 80	AC Mains	1V	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
<p>Remark : 1. Modulation Signal:1KHz 80% AM</p>			


11. Voltage Dips And Interruptions Test

11.1. Test Standard and Level

Test Standard:	EN 55035 (IEC 61000-4-11)
Performance Criterion:	B&C

Test Level		
Test Level %UT	Voltage dip and short interruptions %UT	Duration (in period)
0	100	0.5
70	30	1
0	100	5
/	/	10
		25
		50
		*

11.2. Test Setup

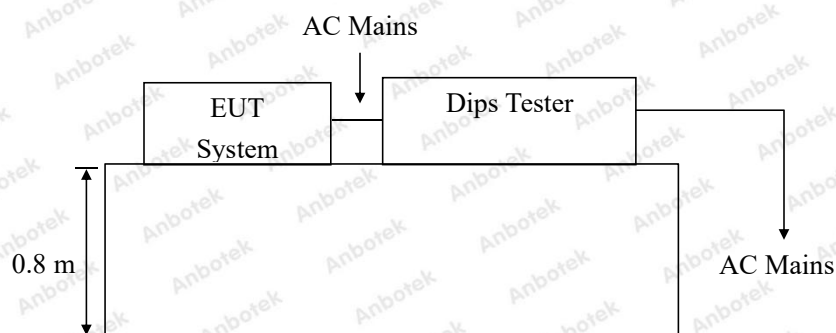

11.3. EUT Configuration on Measurement

The following equipments are installed on voltage dips and interruptions measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

11.4. Operating Condition of EUT

- 11.4.1. Setup the EUT as shown in Section 11.2.
- 11.4.2. Turn on the power of all equipments.
- 11.4.3. Let the EUT work in test mode and measure it.

11.5. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 11.2.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

11.6. Test Results

PASS

Please refer to the following page.

Voltage Dips and Interruptions Test Results

Temperature : 23.3°C		Humidity : 50%	
Power Supply : AC 230V, 50Hz		Expert conclusion : B&C	
Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail			
Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in periods)	Result
0	100	0.5P	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
70	30	25P	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D
Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in periods)	Performance Criterion
0	100	250P	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Power Line Conducted Emission Test



Photo of Radiated Emission Test



Photo of Flicker/ Harmonic Test

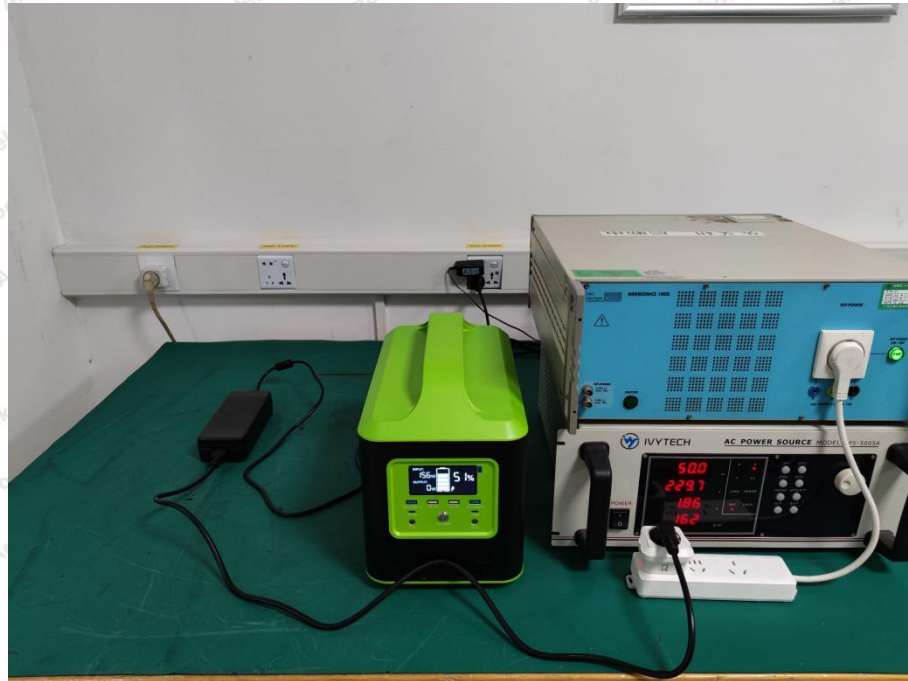


Photo of Electrostatic Discharge Immunity Test

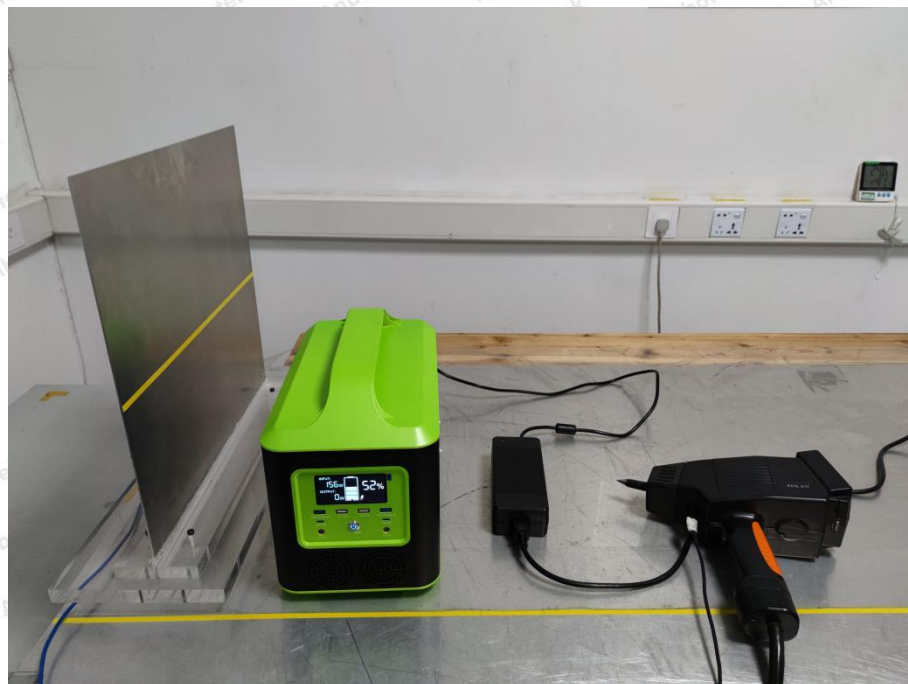


Photo of RF Field Strength susceptibility Test



Photo of Electrical Fast Transient/Burst Immunity Test



Photo of Surge Immunity Test



Photo of Injected currents susceptibility Test


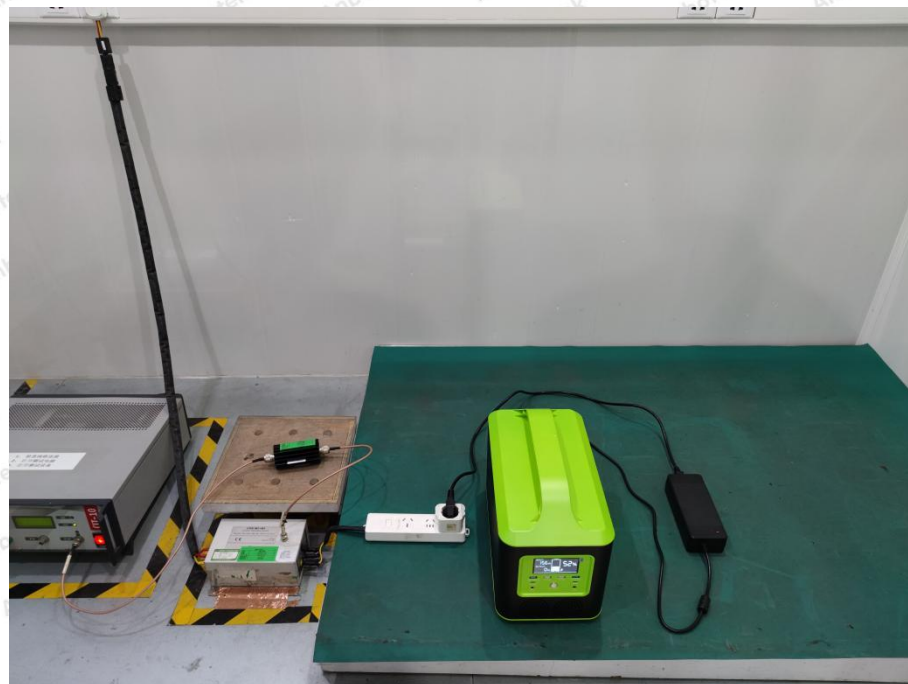


Photo of Voltage Dips and Interruptions Test

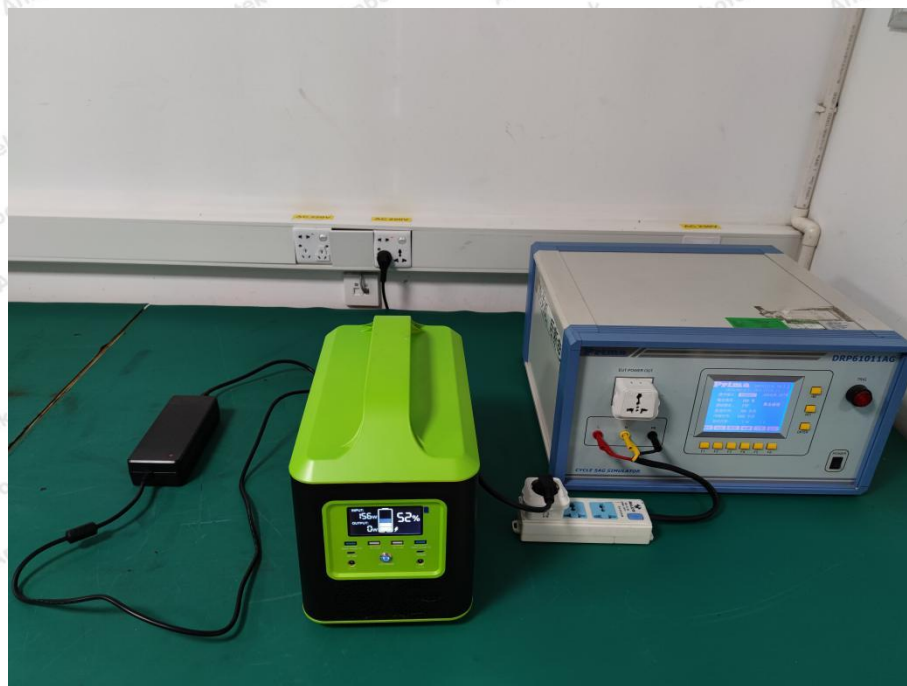

APPENDIX II -- Photo documentation

Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



CE Label

1. The CE conformity marking must consist of the initials 'CE' taking the following form:

If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.

2. The CE marking must have a height of at least 5 mm except where this is not possible on account of the nature of the apparatus.

3. The CE marking must be affixed to the product or to its data plate. Additionally it must be affixed to the packaging, if any, and to the accompanying documents.

4. The CE marking must be affixed visibly, legibly and indelibly.

It must have the same height as the initials 'CE'.

----- End of Report -----

