

# PRESTO SPECTRO

## SPECTRO-DENSITOMETER

Advanced LED Technology • Use 24-7-365 Without Recharging  
The Industry's Most Affordable Spectro • User Friendly

Lab

Lch

Delta E

NEW! SCTV

SPOT COLOR  
TONE VALUE



- Density -
- Dot Gain -
- Dot Area -
- Gray Balance -
- Color Match -



Precision

Easy-Glide Track

NEVER Touches Wet Ink



- Opacity -
- Measure Prints  
& Plates

IN/OUT of Tolerance  
Traffic Lights

STOP

GO



FREE 10-Day Trial

**BETA INDUSTRIES**  
The Quality Control Company



Tel: 800-272-7336 (U.S.), 201-939-2400

Email: [sales@betascreen.com](mailto:sales@betascreen.com)

[www.betascreen.net](http://www.betascreen.net)



# PRESTO SPECTRO


## SPECTRO-DENSITOMETER

Easy, Advanced, Affordable



**The Presto Spectro is ideally suited for 8 color offset or flexo. Volume A is CMYK plus RGB, Gray Balance or spot color. Volume B is CMYK plus OGV and White ink. Volume C and D are any random colors on a job.**

### Color Reference Libraries

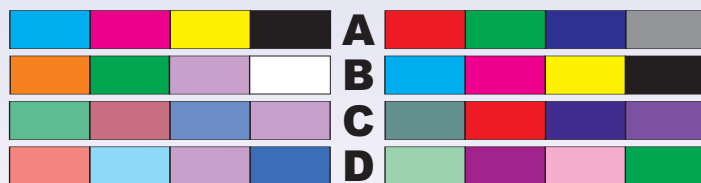

**Memorize any color from multiple sources**




**32 color references are stored "on board" (33,000 with the optional PrestoConnect Software), organized in 4 Volumes (A,B,C,D), each with 8 Colors. The Auto Mode recognizes each of the 8 colors in a Volume when a sample is measured in Density Mode or Delta E.**

## OPTIONAL PRESTOCONNECT COLOR LIBRARY SOFTWARE

### 30,000 COLOR LIBRARY DATABASE



**Create, Collect & Manage Your Color Library with the optional PrestoConnect Color Library Software**

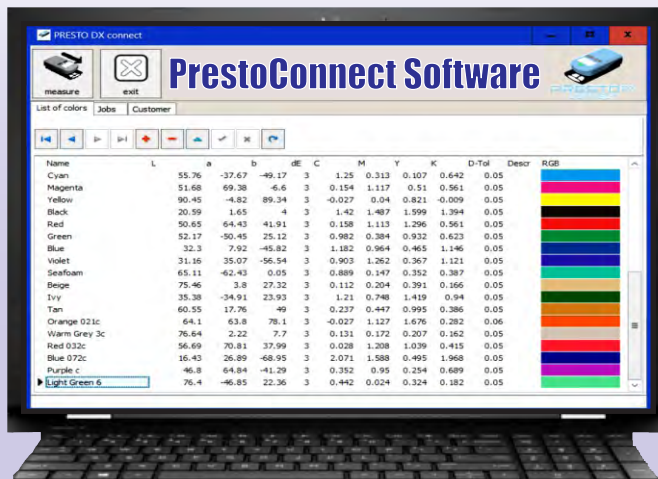

**The database organizes by Color, Customer and Job Date for ease of use and convenience**

## Technical Specifications

Density Range .....0.00 - 2.50  
Density Repeatability .....+/- 0.003  
Percent Dot Area .....0-100%  
Measuring Time .....0.1 sec.  
Linearity .....+/- 1%  
Light Source .....Multi LED's  
Measuring: De 2000&76, Lab, Lch, gray balance, density, dot gain, trapping, SCTV, opacity

Filters.....Status T or E  
Measurements / Battery Set .....>50,000  
Power Source .....4-1.5V AA Alkaline Batteries  
Apertures .....2mm, 3mm.  
Weight .....9.5 oz. [269 grams]  
Dimensions.5.475x2.75x1.6in.[139x70x40mm]  
Housing .....High impact shielded case

# PRESTO SPECTRO



# PRESTOCONNECT SOFTWARE

