PRESTO SPERIO

SPECTRO-DENSITOMETER



FREE 10-Day Trial

BETH INDUSTRIES

The Quality Control Company



707 Commercial Ave. Carlstadt,NJ 07072,USA Tel:201-939-2400,1-800-272-7336, email:sales@betascreen.com www.betascreen.com, www.betascreen.net





PRESTO SPECTRO Ergonomically Designed For Unmatched Speed And Accuracy



TECHNICAL SPECIFICATIONS

Density Range	0.00 - 2.50
Density Repeatability	+/- 0.003
Percent Dot Area	
Measuring Time	0.1 sec.
Linearity	+/- 1 %
Light Source	Multi LED's

Filters.....Status T or E Measurements / Battery Set>50,000 Power Source4-1.5V AA Alkaline Batteries Apertures2mm, 3mm. Weight9.5 oz. [269 grams] Dimensions.5.475x2.75x1.6in.[139x70x40mm] HousingHigh impact shielded case

No Cables or Chargers to Malfunction or Misplace

The PrestoSpectro will store 32 color References, organized in 4 Volumes (A,B,C,D), each with 8 Colors. The AUTO Mode will recognize each of the 8 colors within a Volume when a sample is measured in Density mode or Delta E.


COLOR REFERENCE LIBRARY В C D

Memorize any color from multiple sources

The Presto Spectro is ideally suited for 8 color offset or flexo presses. Volume A is CMYK plus RGB, Gray Balance or spot color. Volume B is CMYK plus OGV and White ink Volume C and D are any random colors on a print job.



Create, collect and manage unlimited colors with the new advanced **Beta Presto** Spectro

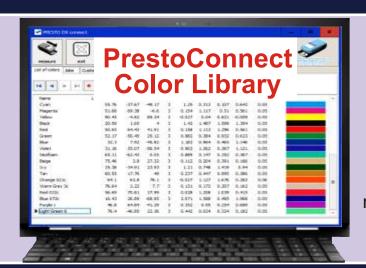



The database organizes by Color, Customer and Job Date making it convenient for production personnel to use

BETACOLOR VIEWER 3

CMYK ENHANCEMENT **MAGNIFICATIONS 10X-100X** Makes YELLOW Look Almost BLACK!

THE PERFECT COMPANION FOR THE PRESSROOM















