

PRESTO SPECTRO

SPECTRO-DENSITOMETER

Advanced LED Technology • Use 24/7/365 Without Recharging
User Friendly • The Industry's Most Affordable Spectro

L*a*b*

Delta E

NEW! SCTV

**SPOT COLOR
TONE VALUE**

- Density
- Dot Gain
- Dot Area
- Gray Balance
- Color Match
- Opacity




**Precision
Easy-Glide Track
NEVER Touches Wet Ink**

Measure Prints & Plates

IN / OUT of Tolerance
Traffic Lights

GO

STOP



FREE 10-Day Trial

BETA INDUSTRIES
The Quality Control Company



Tel: 800-272-7336 (U.S.), 201-939-2400

Email: sales@betascreen.com

www.betascreen.net





PRESTO SPECTRO

SPECTRO-DENSITOMETER

Easy, Advanced, Affordable



Color Reference Library

The Presto Spectro will store 32 color references, organized in 4 Volumes

(A,B,C,D), each with 8 Colors. The Auto Mode recognizes each of the 8 colors in a Volume when a sample is measured in Density mode or Delta E.



Memorize any color from multiple sources




The Presto Spectro is ideally suited for 8 color offset or flexo.

Volume A is CMYK plus RGB, Gray Balance or spot color.

Volume B is CMYK plus OGV and White ink
Volume C and D are any random colors on a job.



Create, Collect & Manage Unlimited Colors with the PrestoConnect Color Library Software

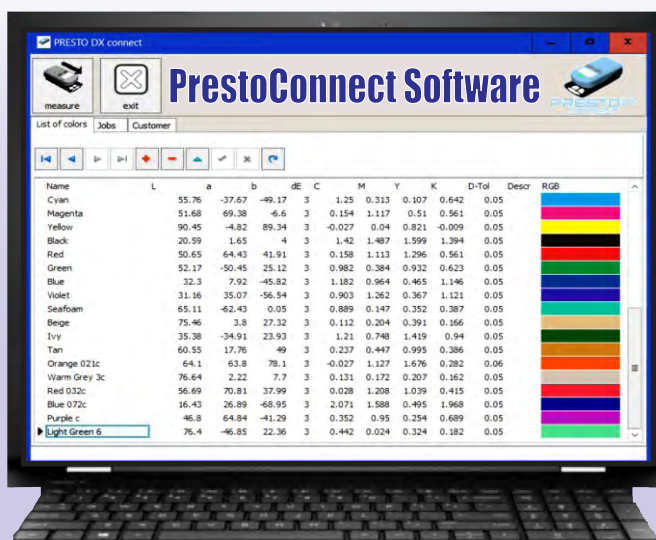

The database organizes by Color, Customer and Job Date for ease of use and convenience

Technical Specifications

Density Range0.00 - 2.50
Density Repeatability+/- 0.003
Percent Dot Area0-100%
Measuring Time0.1 sec.
Linearity+/- 1%
Light SourceMulti LED's
Measuring: De 2000&76, Lab, Lch, gray balance, density, dot gain, trapping, SCTV, opacity

Filters.....Status T or E
Measurements / Battery Set>50,000
Power Source4-1.5V AA Alkaline Batteries
Apertures2mm, 3mm.
Weight9.5 oz. [269 grams]
Dimensions.5.475x2.75x1.6in.[139x70x40mm]
HousingHigh impact shielded case

