


## Alutest PL

#A-PL

- Probe Type
  - UT
  - EC
- Imperfections Sensitivity:
  - Internal: FBH 0.4\*
  - External: 0.2 mm - 10 mm
- Plate Specifications:
  - Width: 1000 mm - 6000 mm
  - Length: from 1000 mm
  - Thickness: 3 mm - 800 mm

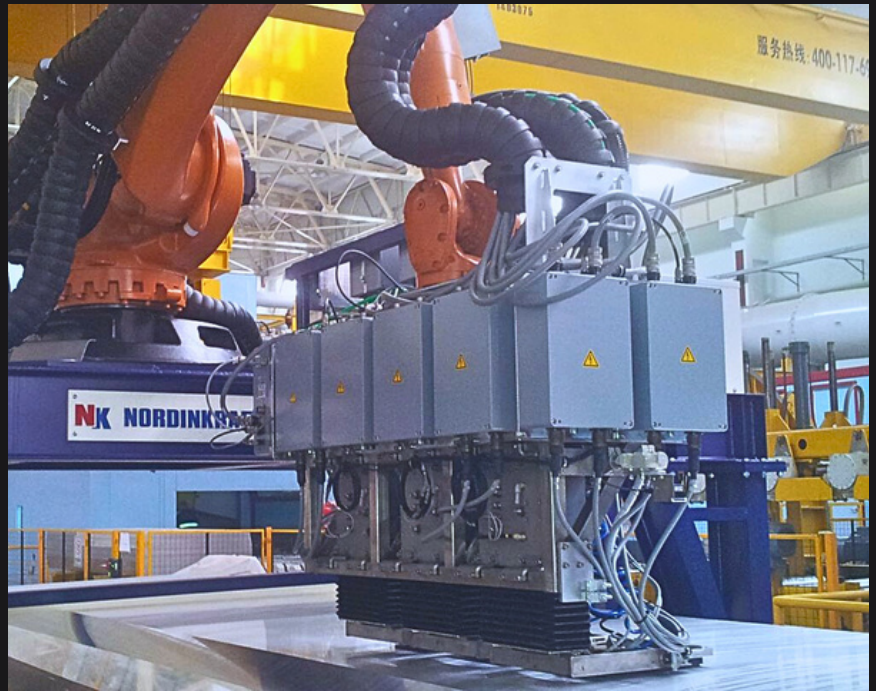

The Alutest-PL systems are intended for fully automatic ultrasonic and eddy current examination of plates and slabs made of non-ferrous metals such as aluminum, titanium, copper, etc.

The general configuration of Alutest-PL systems is similar in concept to the configuration of Nordiscan-PL scanners. However, unlike the Nordiscan-PL, the ultrasonic and eddy current probes of the Alutest-PL are designed to meet the most stringent standards of the aerospace industry.

Meets all industry standards.