


CONTENTS

Surface



Wago Connector (2)

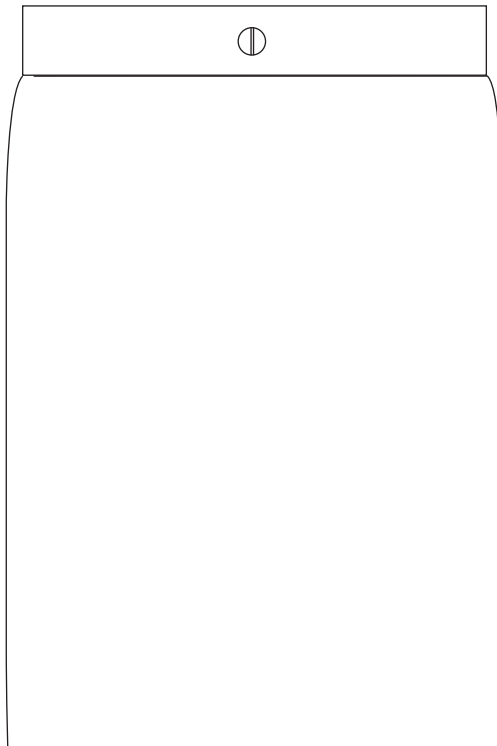

Wago Connector (2)



(x2) Long 8-32 screw
On 240V fixtures only




(x2) Wood screw
On 240V fixtures only




(x2) Metal screw
On 240V fixtures only



(x2) Toggle anchor
On 240V fixtures only



Bulb




SAFETY INFORMATION

Only one light bulb per socket.
Only suitable for direct mounting on non-combustible surfaces.
Under no circumstances can Surface be mounted on normally flammable surfaces.
Suitable for dry, indoor use only.
Maximum ambient temperatures: 25° C

CEILING INSTALLATION | SURFACE

Note: Please contact a licensed electrician.


1. Start with unscrewing the three screws (A) to release the crossbar (B) from the fixture (C).

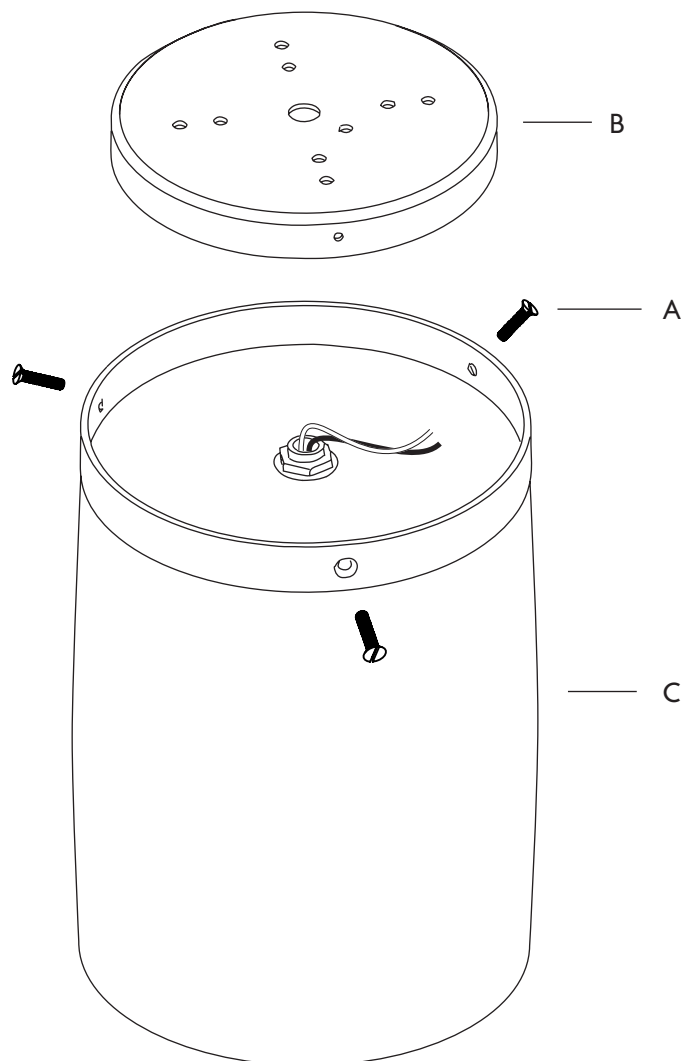

CEILING INSTALLATION | SURFACE

Note: Please contact a licensed electrician.


2. Mount the crossbar (B) onto J-box (D), and secure it with two screws (E).
Be sure to feed the lead and ground (F) wire through the center hole in the crossbar.
3. Connect the ground wire to the crossbar using the grounding screw (G).

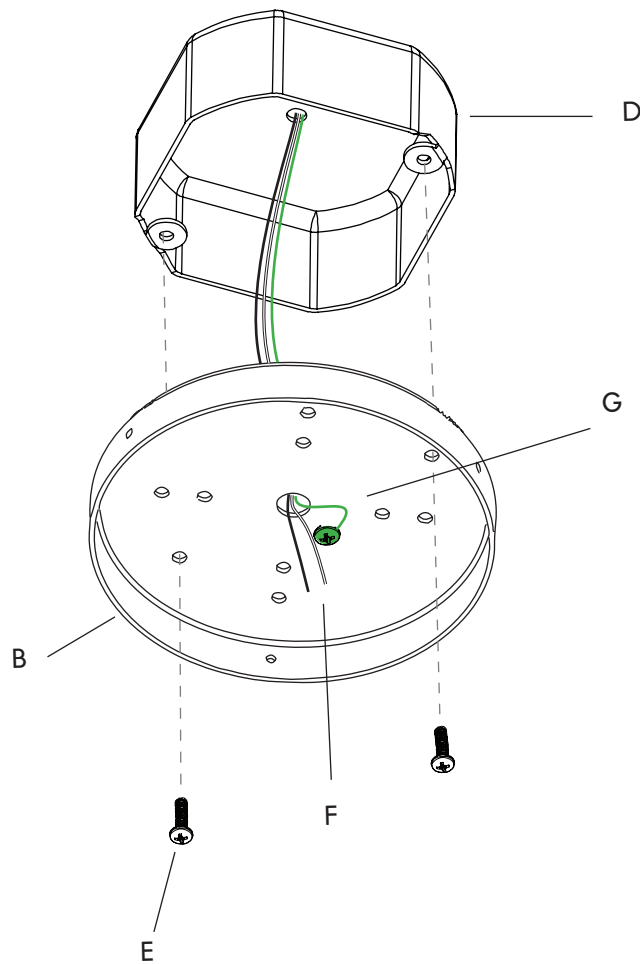

CEILING INSTALLATION | SURFACE

Note: Please contact a licensed electrician.

5. Raise the fixture (C) to the crossbar (B) and make the electrical connection using the provided 2 port wagos (H).
6. Then secure the fixture to the crossbar with three screws (A).

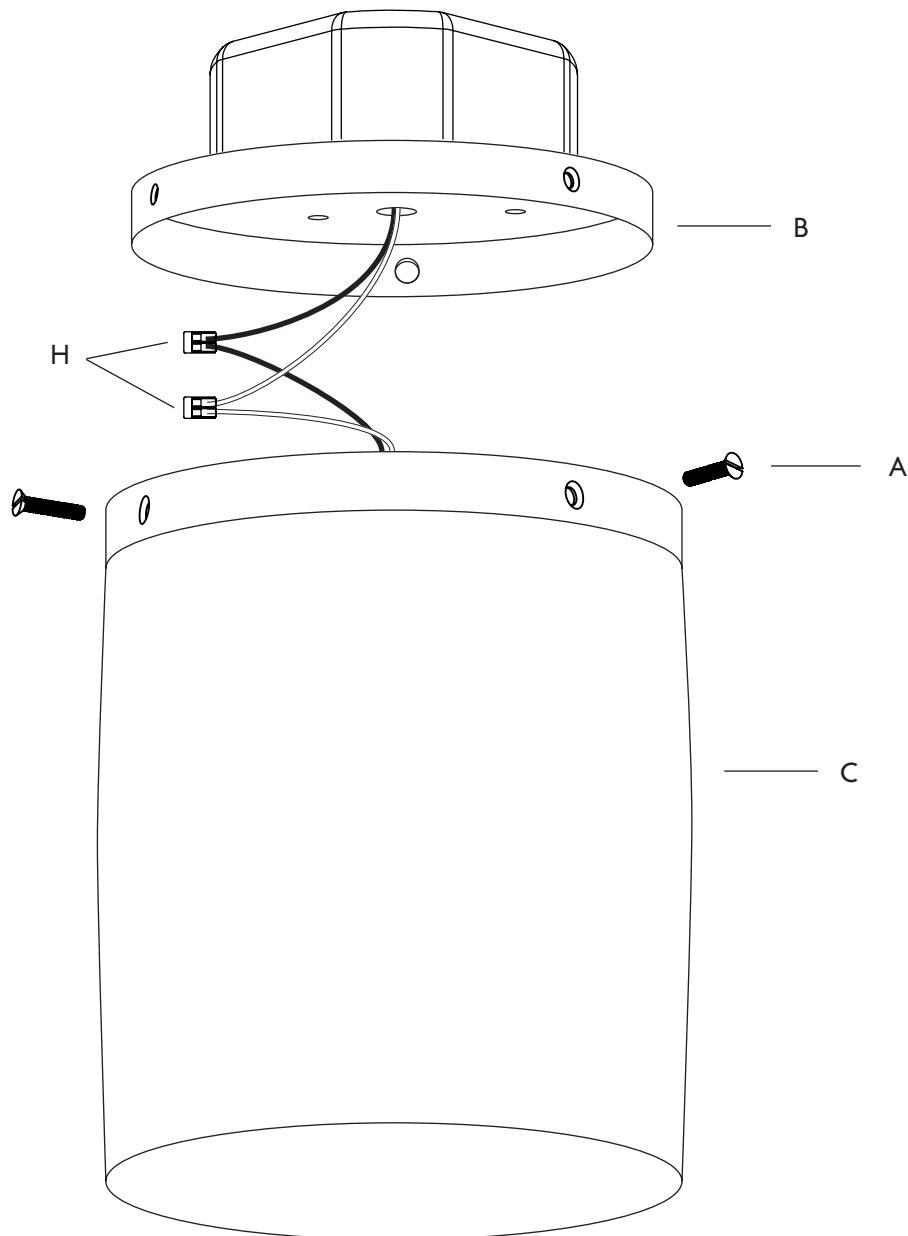

BULB INSTALLATION

Note: Please contact a licensed electrician.

1. Screw in the included LED bulb (A) into the socket (B) in a clockwise direction.

