


## Roll & Hill





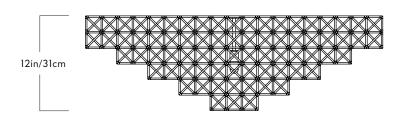



\_\_\_\_\_\_ 38in/96cm \_\_\_\_\_

## Gridlock

## 5640

<u>Series</u> Gridlock

Product 5640

 $\frac{\underline{\mathsf{Dimensions}}}{\mathsf{L}\;3\mathsf{8in}/9\mathsf{6cm}\;\mathsf{W}\;3\mathsf{8in}/9\mathsf{6cm}}$ 

H 12in/31cm

Weight 40lb/18kg

Materials Brass, steel

Finishes Raw Brass

**Mounting Plate** 

.5"x 4.5"x4.5" square mounting plate in matching metal finish

Certifications UL/cUL (120V) CE (240V) 120V Illumination Integrated LED

Wattage: 23.6 Watts Lumens: 2100 Lumens est.

Color Temperature: 2700K, CRI: 90+ LED Lifetime: 50,000 hours est. Dimming: Triac, ELV or 0-10V

240V Illumination Integrated LED

Wattage: 23.6 Watts Lumens: 2100 Lumens est.

Color Temperature: 2700K, CRI: 90+ LED Lifetime: 50,000 hours est.

Dimming: ELV or 0-10V

**Driver location** 

H lin x W 1.6in x L 3.25in Driver located in junction box

Fixture Mounting

Designed to be mounted on standard 4in. Electrical Box. Two #8-32 screws included.

Additional mounting hardware provided

for 240V versions.