

# ASPIRE CAMILLIEN CE

*Enhanced control on rail trails,  
open roads and any uneven  
gravel track.*





GRAVEL eROAD

# ASPIRE CAMILLIEN CE



## LIGHTWEIGHT GRAVEL SPECIFIC BUILD

Lightweight with drop-bars, 42c WTB gravel tires and 2x10 road capable group set. A durable and robust build that inspires confidence through stability, traction and exceptional control on rough or rocky terrain and will still speed along the open road with an exceptionally agile and natural ride feeling.



PEDAL ASSIST SYSTEM



CLASS 3 capable where permitted \*\*

## MOTOR

250W slim form motor with advanced-response dual side 40 pulse torque sensor technology for intuitive reactivity to rider input.

## POWER AND RANGE

378Wh capacity removable integrated battery with security lock. Power when you need it, discrete and passive when you don't. Providing up to 90km (56mi)\* range.



## PEDAL ASSIST SEGMENTS

Eco/Tour/Sport/Turbo/Boost



# ASPIRE CAMILLIEN CE

MSRP **\$3,299**

## GRAVEL eROAD

### FRAMESET

FRAME	Hydroformed 6061 Aluminum Alloy 700 Gravel frame with smooth welds. Fender/rack mounts, internal cable routing. Removable integrated battery with security lock
COLOR	Matte Taupe with Black accents
FORK	Hydroformed alloy 700C with quick release

### DRIVETRAIN

SHIFTERS	MICROSHIFT CENTOS 2x10
FRONT DERAILLEUR	MICROSHIFT CENTOS FD-R712-B
CHAINRINGS	48/32T
CHAIN	KMC X10 Double X-Durability
REAR DERAILLEUR	MICROSHIFT CENTOS RD-R51M 10-speed
CASSETTE	MICROSHIFT CENTOS 10-speed 11-28T

### COMPONENTS

HANDLEBAR	Alloy drop bar, 420mm
GRIPS	FSA bar tape - black
STEM	Alloy 4 bolt, 90mm, 31.8mm clamp dia.
SEAT POST	Alloy 30.4mm with quick release
SADDLE	VELO for iGO
BRAKE LEVERS	MICROSHIFT CENTOS Dual Control Levers
BRAKE CALIPERS	TEKTRO Cable Actuated Hydraulic Disc HY/RD
ROTORS	F160/R160

### WHEELS

TIRES	WTB Rolute 700X42C - tanwall
RIMS	Alloy P23D 700C - black

### ELECTRIC TECHNOLOGY

BLUETOOTH DISPLAY UNIT	NEW iGO Mobile App (Android and iOS). Customizable profile and performance settings with full diagnostic monitoring and alerts. 2" HD High Brightness IPS Color LCD Display, Ergonomically Designed Buttons, IP65 Waterproof, Password Protected Power On Option, USB Charging Port, Light Auto On/Off Option (Ambient Light Detector), Interface Color Coded Display Reference (for Quick Glance Safety), Main Power/PAS Control/Ride, Stats and Settings Toggle, PAS Level/Battery/Power/Clock, Speedometer/Max Speed/Avg Speed, Trip Distance, Battery Voltage/Capacity Percentage/Range/Accumulated Charging Cycles, Motor Power Output Average/Maximum, Ride Analysis Statistics, Diagnostic and Warning Information, Walk Assist
MOTOR	iGO DRIVE SE 250W geared rear hub drive, 36V
TORQUE	up to 45Nm
BATTERY	3500mAh SAMSUNG cell, integrated removable lithium battery with security lock (36V   10.5Ah   378Wh)
RANGE	90km (56mi) *
PEDAL ASSIST SYSTEM	Eco/Tour/Sport/Turbo/Boost color coded per PAS level
SENSOR	Dual sided 40 pulse Torque Sensor
CLASS	Class1 / Class3 capable where permitted **

### ACCESSORIES INCLUDED

Water Bottle Bosses on Seat Tube & Under Top Tube, Tool Kit, Battery Charger

### NOTES


BIKE WEIGHT (without battery)	16.7kg (36.8 lbs)	WEIGHT CAPACITY	125kg (275 lbs)
BATTERY WEIGHT	2kg (4.4 lbs)		



\*Actual range may vary depending on Ah of battery rider weight and other riding conditions.  
Specifications subject to change

SUGGESTED MAX. RIDER HEIGHT  
s/m - 175 cm (5'9") | m/l - 188 cm (6'2")

SUGGESTED MIN. RIDER HEIGHT  
s/m - 152 cm (5'0") - m/l - 170 cm (5'7")

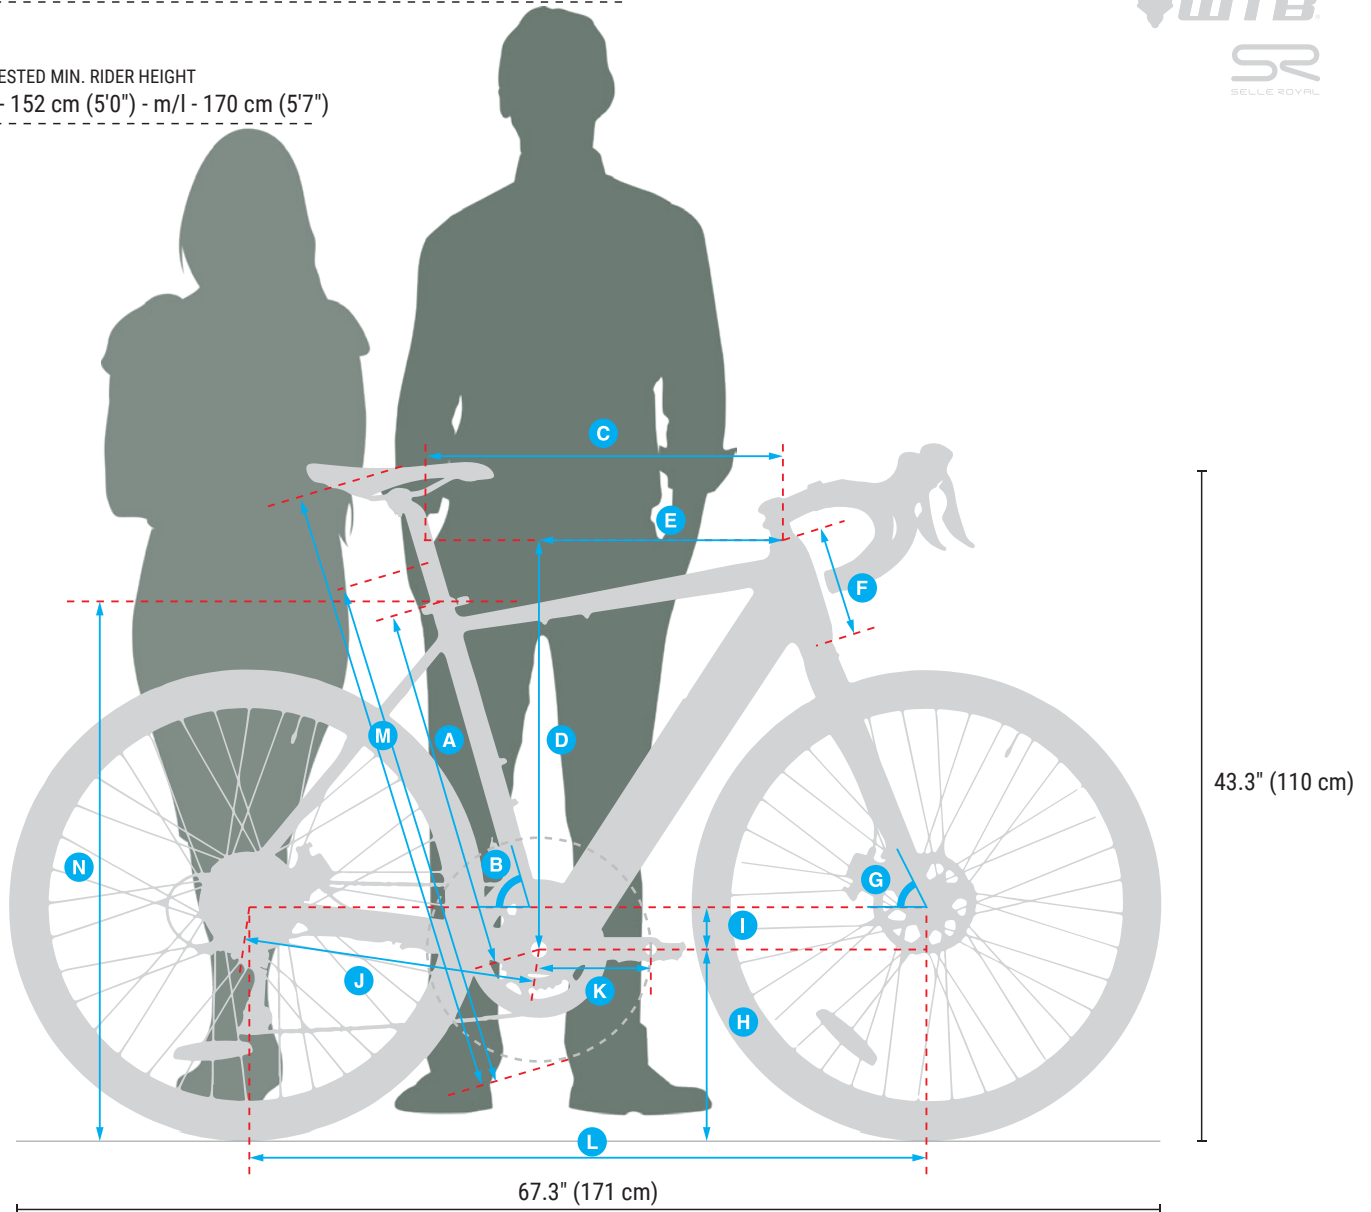

FRAME SIZE	s/m - 48cm (19")	m/l - 54cm (21")	s/m - 48cm (19")	m/l - 54cm (21")
<b>A</b> SEAT TUBE LENGTH	480mm	540mm	<b>H</b> BOTTOM BRACKET HEIGHT	275mm / 275mm
<b>B</b> SEAT TUBE ANGLE	74°	74°	<b>I</b> BOTTOM BRACKET DROP	65mm / 65mm
<b>C</b> EFFECTIVE TOP TUBE LENGTH	534mm	550mm	<b>J</b> CHAINSTAY LENGTH	445mm / 445mm
<b>D</b> STACK	609mm	609mm	<b>K</b> CRANK LENGTH	170mm / 170mm
<b>E</b> REACH	360mm	375mm	<b>L</b> WHEELBASE	1013mm / 1028mm
<b>F</b> HEAD TUBE LENGTH	160mm	160mm	<b>M</b> SADDLE HEIGHT (MIN/MAX)	79cm / 99cm (31.1" / 39") / 85cm / 105cm (33.5" / 41.3")
<b>G</b> HEAD TUBE ANGLE	73°	73°	<b>N</b> STAND OVER HEIGHT	77.5cm (30.5") / 79.5cm (31")