

MINI INTERNATIONAL
PRODUCT RANGE

COMMERCIAL CATALOGUE 20²³₂₄

Lighting+Solutions
HUAYI



COMMERCIAL CATALOGUE 20²³₂₄

HUAYI
Lighting+Solutions
www.huayilighting.com

HUAYI
Lighting+Solutions



HUAYI

Founded in 1986, HUAYI Lighting Company Limited was located in "China Lighting Capital" --Guzhen, Zhongshan city. After over 35 years development, keeping pursuing the production strategy of Quality and Profession, the company has become one of the prestigious manufacturers in the lighting industry. The brand of HUAYI has been recognized by customers both from China and abroad.

With 200,000 square meters industrial area and 20,000 square meters of a modern showroom catering for various types of lighting products, Huayi Lighting has kept the leading position in the line of lighting since its foundation.

The Huayi Engineering Center has a senior professional strength, characterized by the excellent ability of system implementation, organization of the field cross construction, effect verification and correction of deviation. Huayi Engineering Center combines its resources and everyone does its duties and works hard to present charm in the lighting projects through the integration of supply chain, construction management, after sale, domestic and foreign marketing and other one-stop services.



Contents

INDOOOR

P001-004	LED DOWNLIGHT
P005-012	DOWNLIGHT FRAME
P013-016	SPOT LIGHT
P017-024	LED CEILING LIGHT
P025-030	LED PANEL LIGHT
P031-040	TRACK LIGHT
P041-042	MIRROR LIGHT
P043-052	TABLE LIGHT
P053-066	INDUSTRIAL LIGHT

LIGHT SOURCE

P067-068	A60
P069-070	GU10&MR16
P071-072	LED FILAMENT
P073-074	C37&G45
P075-078	G4&G9
P079-082	G&R&PAR LIGHT
P083-084	T LIGHT
P085-088	BIG POWER LIGHT
P089-090	LED TUBE

OUTDOOR

P091-094	LED FLOODLIGHT
P095-098	BULKHEAD
P099-102	LED STREETLIGHT
P103-106	LED HIGHBAY LIGHT
P107-108	LED WORKLIGHT
P109-110	LED GARDENLIGHT

SOLAR LIGHT

P111-118	SOLAR FLOODLIGHT
P119-122	SOLAR WALL LIGHT
P123-126	SOLAR STREET LIGHT
P127-130	SOLAR GARDEN LIGHT
P131-132	SOLAR STRIP LIGHT

SOLAR ENERGY

P133-136	PORTABLE POWER STATION
----------	------------------------

INDOOR



LED DOWN LIGHT



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Cut-Size
HY-02-DL-6W-*	6W	PC+ABS+ALUMINUM	0.5	70-80LM/W	3000K/4000K/6000K	φ110mm	φ80-95mm
HY-02-DL-9W-*	9W	PC+ABS+ALUMINUM	0.5	70-80LM/W	3000K/4000K/6000K	φ130mm	φ105-120mm
HY-02-DL-12W-*	12W	PC+ABS+ALUMINUM	0.5	75-85LM/W	3000K/4000K/6000K	φ165mm	φ125-155mm
HY-02-DL-18W-*	18W	PC+ABS+ALUMINUM	0.5	80-90-LM/W	3000K/4000K/6000K	φ200mm	φ165-190mm
HY-02-DL-24W-*	24W	PC+ABS+ALUMINUM	0.5	80-90-LM/W	3000K/4000K/6000K	φ250mm	φ215-240mm
HY-02-DL-30W-*	30W	PC+ABS+ALUMINUM	0.5	80-90-LM/W	3000K/4000K/6000K	φ250mm	φ215-240mm

AC220-240V



Item Code	Wattage	Material	Lighting Source	Beam Angle	Luminous flux	Color temp.	Certificate	Driver
HY-02-DL02-9W-WW	9W	Die-casting Aluminum	-	90°	540LM	3000K	CCC	Isolated
HY-02-DL02-9W-CW	9W	Die-casting Aluminum	-	90°	540LM	4000K	CCC	Isolated
HY-02-DL02-20W-WW	20W	Die-casting Aluminum	COB	90°	1200LM	3000K	CCC	Isolated
HY-02-DL02-20W-CW	20W	Die-casting Aluminum	COB	90°	1200LM	4000K	CCC	Isolated
HY-02-DL03-9W-WW	9W	Die-casting Aluminum	-	24°	540LM	3000K	CCC	Isolated
HY-02-DL03-9W-CW	9W	Die-casting Aluminum	-	24°	540LM	4000K	CCC	Isolated
HY-02-DL03-20W-WW	20W	Die-casting Aluminum	COB	24°	1200LM	3000K	CCC	Isolated
HY-02-DL03-20W-CW	20W	Die-casting Aluminum	COB	24°	1200LM	4000K	CCC	Isolated

AC220-240V



Item Code	Wattage	Material	Luminous flux	Color temp.	Certificate	Product Size
HY-02-DL04-3W-*	3W	Injection molded aluminum	180LM	3000K/4000K/5700K	CCC	98*H30mm
HY-02-DL04-5W-*	5W	Injection molded aluminum	300LM	3000K/4000K/5700K	CCC	98*H30mm

AC220-240V



Item Code	Wattage	Material	Beam Angle	Luminous flux	Color temp.	Certificate	Driver	Product Size
HY-02-DL05-9W-WW	9W	Aluminum+PC	24°	570LM	3000K	CCC	Isolated	φ85*48mm
HY-02-DL05-9W-CW	9W	Aluminum+PC	24°	570LM	4000K	CCC	Isolated	φ85*48mm
HY-02-DL06-9W-CW	9W	Aluminum+PC	80°	570LM	4000K	CCC	Isolated	φ85*48mm
HY-02-DL06-9W-NW	9W	Aluminum+PC	80°	570LM	5700K	CCC	Isolated	φ85*48mm

AC220-240V

Frame+Lamp=Downlight



Choose your own colors



02DL-PA-0175 02DL-PA-0275 02DL-PA-0375 02DL-PA-0670 02DL-PA-0885A
 02DL-PA-0785A 02DL-PA-038080 02DL-PA-0380160 02DL-PA-10100B 02DL-PA-09100A



Item Code	Product size(mm)	Cut-Size(mm)
HY-02-DL-0175	φ88x32	φ75
HY-02-DL-0275	φ88x32	φ75
HY-02-DL-0375	φ90x29	φ75
HY-02-DL-0475	φ90x27	φ75
HY-02-DL-0575	φ90x28	φ75
HY-02-DL-0670	φ90x27	φ70
HY-02-DL-09100A	96x96x100	Surface Mounted
HY-02-DL-09100B	96x96x100	Surface Mounted
HY-02-DL-09100C	96x96x100	Surface Mounted
HY-02-DL-10100A	φ96x100	Surface Mounted
HY-02-DL-10100B	φ96x100	Surface Mounted
HY-02-DL-10100C	φ96x100	Surface Mounted

Item Code	Product size(mm)	Cut-Size(mm)
HY-02-DL-0785A	φ88x32	93x93x53
HY-02-DL-0785B	φ88x32	93x93x70
HY-02-DL-0885A	φ90x29	φ93x53
HY-02-DL-0885B	φ90x27	φ93x69
HY-02-DL-038080	φ90x28	93x93x29
HY-02-DL-0380160	φ90x27	173x93x29
HY-02-DL-0380240	96x96x100	252x93x29
HY-02-DL-048080	96x96x100	93x93x25
HY-02-DL-0480160	96x96x100	173x93x25
HY-02-DL-0480240	φ96x100	252x93x27
HY-02-DL-058080	φ96x100	93x93x25
HY-02-DL-0580160	φ96x100	173x93x25
HY-02-DL-0580240	φ96x100	252x93x27

Down light Frame





Show off



Optional reflective cup



Show off




Optional reflective cup



Item Code	Size	Cut-Out	Installation Method	Material	Suitable Power	Application
HY-02-DL-D501	φ85*H30mm	φ75mm	Recessed	Die-Casting AL+PC	3-9W	MR16/COB
HY-02-DL-D501M	φ90*H30mm	φ75mm	Recessed	Die-Casting AL+PC	3-9W	MR16/COB
HY-02-DL-D501PC	φ85*H30mm	φ75mm	Recessed	PC+PC	3-9W	MR16/COB
HY-02-DL-D501LPC	φ90*H30mm	φ75mm	Recessed	PC+PC	3-9W	MR16/COB



Item Code	Size	Cut-Out	Installation Method	Material	Suitable Power	Application
HY-02-DL-H805-RD	φ80*56mm	φ75mm	Recessed	Die-Casting AL+PC	5-9W	MR16/COB
HY-02-DL-H805-SQ	81*81*56mm	φ75mm	Recessed	Die-Casting AL+PC	5-9W	MR16/COB
HY-02-DL-H806	φ80*53mm	φ85mm	Recessed	Die-Casting AL+PC	5-9W	MR16/COB

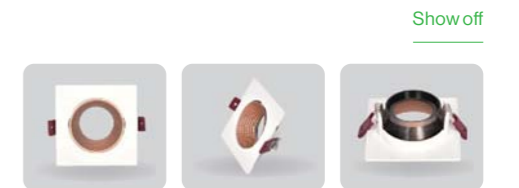

Item Code	Size	Cut-Out	Installation Method	Material	Suitable Power	Application
HY-02-DL-H101G-1-SQ	92*92mm	φ75mm	Recessed	Die-Casting AL+PC/PC+PC	5-12W	MR16/COB
HY-02-DL-H101G-2-SQ	172*92mm	150*75mm	Recessed	Die-Casting AL+PC/PC+PC	5-12W	MR16/COB
HY-02-DL-H101G-3-SQ	252*92mm	230*75mm	Recessed	Die-Casting AL+PC/PC+PC	5-12W	MR16/COB



Item Code	Size	Cut-Out	Installation Method	Material	Suitable Power	Application
HY-02-DL-H502-RD	φ80*39mm	φ75mm	Recessed	Die-Casting AL+PC	5-9W	MR16/COB



Show off




Optional reflective cup



Show off



Optional reflective cup

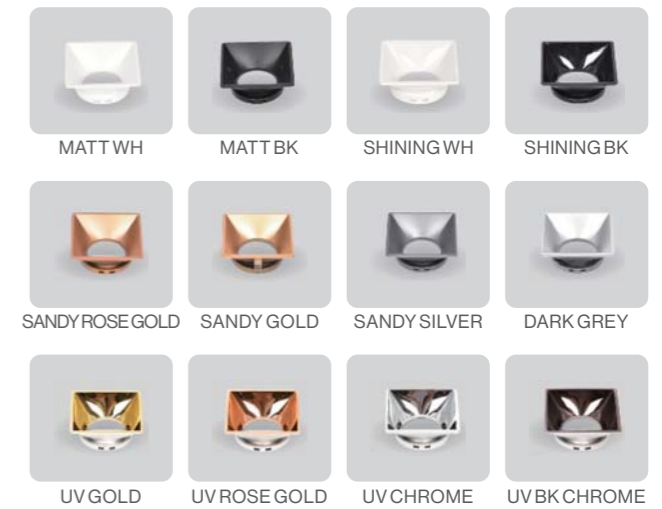

Item Code	Size	Cut-Out	Installation Method	Material	Suitable Power	Application
HY-02-DL-H600M-RD	φ90*105mm	/	Surface Mounted	PC+PC	5-7W	MR16/COB
HY-02-DL-H600M-SQ	90*90*105mm	/	Surface Mounted	PC+PC	5-7W	MR16/COB



Item Code	Size	Cut-Out	Installation Method	Material	Suitable Power	Application
HY-02-DL-H508	72*117mm	/	Surface Mounted	Die-Casting AL+PC	5-7W	MR16/COB
HY-02-DL-H508A	72*72*117mm	/	Surface Mounted	Die-Casting AL+PC	5-7W	MR16/COB



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Cut-Size
HY-02-SL-R3W-*	3W	PBT	>0.4	260LM	2700K-6500K	φ75*45mm	50-60mm
HY-02-SL-R5W-*	5W	PBT	>0.5	520LM	2700K-6500K	φ90*45mm	70-75mm
HY-02-SL-R7W-*	7W	PBT	>0.5	650LM	2700K-6500K	φ90*45mm	70-75mm
HY-02-SL-R10W-*	10W	PBT	>0.5	1100LM	2700K-6500K	φ120*55mm	90-95mm

AC100-240V



Spot light



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Cut-Size
HY-02-SL-S3W-*	3W	PBT	>0.4	260LM	2700K-6500K	75*75*45mm	65*65mm
HY-02-SL-S5W-*	5W	PBT	>0.5	520LM	2700K-6500K	90*90*45mm	75*75mm
HY-02-SL-S7W-*	7W	PBT	>0.5	650LM	2700K-6500K	90*90*45mm	75*75mm
HY-02-SL-S10W-*	10W	PBT	>0.5	1100LM	2700K-6500K	120*120*45mm	95*95mm

AC100-240V



Item Code	Wattage	Material	Lighting Source	Beam Angle	Luminous flux	Color temp.	Certificate	Driver
HY-02-SL01-9W-WW	9W	Die-casting Aluminum+PC	COB	24°	600LM	3000K	CCC	Isolated
HY-02-SL01-9W-CW	9W	Die-casting Aluminum+PC	COB	24°	600LM	4000K	CCC	Isolated
HY-02-SL01-12W-WW	12W	Die-casting Aluminum+PC	COB	24°	780LM	3000K	CCC	Isolated
HY-02-SL01-12W-CW	12W	Die-casting Aluminum+PC	COB	24°	780LM	4000K	CCC	Isolated

AC220-240V



Item Code	Wattage	Material	Beam Angle	Luminous flux	Color temp.	Certificate	Product Size
HY-02-SL03-5W-WW	5W	PC+Nylon+Aluminum	24°	350LM	3000K	CCC	φ83*57mm
HY-02-SL03-5W-CW	5W	PC+Nylon+Aluminum	24°	350LM	4000K	CCC	φ83*57mm
HY-02-SL03-7W-WW	7W	PC+Nylon+Aluminum	24°	490LM	3000K	CCC	φ83*57mm
HY-02-SL03-7W-CW	7W	PC+Nylon+Aluminum	24°	490LM	4000K	CCC	φ83*57mm
HY-02-SL04-5W-CW	5W	PC+Nylon+Aluminum	60°	350LM	4000K	CCC	φ83*62mm
HY-02-SL04-5W-NW	5W	PC+Nylon+Aluminum	60°	350LM	5700K	CCC	φ83*62mm
HY-02-SL04-7W-CW	7W	PC+Nylon+Aluminum	60°	490LM	4000K	CCC	φ83*62mm
HY-02-SL04-7W-NW	7W	PC+Nylon+Aluminum	60°	490LM	5700K	CCC	φ83*62mm

AC220-240V



Item Code	Wattage	Material	Lighting Source	Beam Angle	Luminous flux	Color temp.	Certificate	Driver
HY-02-SL02-10W-WW	10W	Die-casting Aluminum	COB	24°	550LM	3000K	CCC	Isolated
HY-02-SL02-10W-CW	10W	Die-casting Aluminum	COB	24°	550LM	4000K	CCC	Isolated
HY-02-SL02-20W-WW	20W	Die-casting Aluminum	COB	24°	1200LM	3000K	CCC	Isolated
HY-02-SL02-20W-CW	20W	Die-casting Aluminum	COB	24°	1200LM	4000K	CCC	Isolated

AC220-240V




Item Code	Wattage	Material	Lighting Source	Beam Angle	Luminous flux	Color temp.	Product Size
HY-02-SL05-6W-*	6W	Aluminum+Plastic	COB	24°	250LM	3000K/4000K/5700K/6500K	D90*H46.5mm
HY-02-SL05-10W-*	10W	Aluminum+Plastic	COB	24°	400LM	3000K/4000K/5700K/6500K	D105*H60mm
HY-02-SL05-15W-*	15W	Aluminum+Plastic	COB	24°	600LM	3000K/4000K/5700K/6500K	D115*H63mm
HY-02-SL06-12W-*	12W	Aluminum	COB	12°/24°/36°	960LM	3000K/4000K/5700K/6500K	D90*H61.5mm
HY-02-SL06-18W-*	18W	Aluminum	COB	12°/24°/36°	1440LM	3000K/4000K/5700K/6500K	D105*H72mm
HY-02-SL06-30W-*	30W	Aluminum	COB	12°/24°/36°	2400LM	3000K/4000K/5700K/6500K	D125*H86mm
HY-02-SL06-45W-*	45W	Aluminum	COB	12°/24°/36°	3600LM	3000K/4000K/5700K/6500K	D175*H115mm

AC220-240V



LED ceiling lights

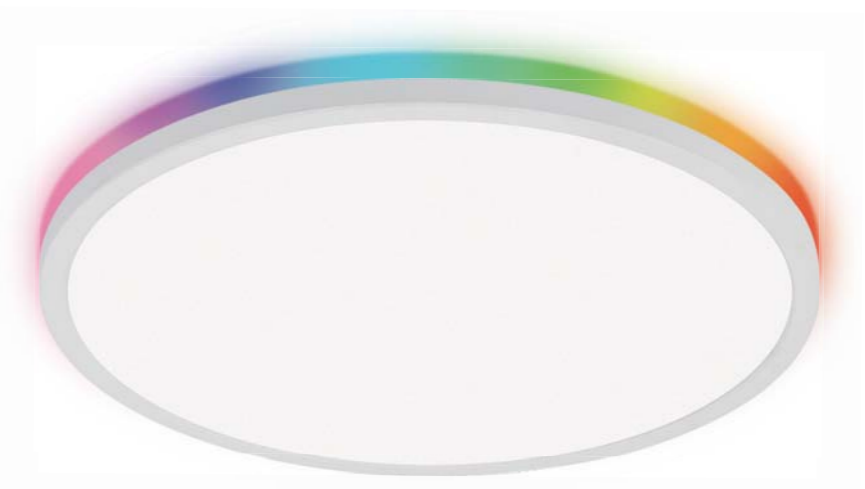

WIFI Control



Bluetooth



RGB CCT



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-CL01-18W-*	18W	PP+PS	0.7	1430LM	3000K/4000K/6000K	φ290*25mm
HY-02-CL01-24W-*	24W	PP+PS	0.7	2000LM	3000K/4000K/6000K	φ290*25mm
HY-02-CL01-36W-*	36W	PP+PS	0.7	2900LM	3000K/4000K/6000K	φ400*25mm

AC220-240V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-CL02-R12W-*	12W	PC	>0.5	1080LM	3000/4000/6500K	φ220*48mm
HY-02-CL02-R18W-*	18W	PC	>0.5	1620LM	3000/4000/6500K	φ280*48mm
HY-02-CL02-R24W-*	24W	PC	>0.5	2160LM	3000/4000/6500K	φ330*48mm

AC175-265V



3000K 4000K 6500K



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-CL02-S12W-*	12W	PC	>0.5	1080LM	3000/4000/6500K	220*220*48mm
HY-02-CL02-S18W-*	18W	PC	>0.5	1620LM	3000/4000/6500K	280*280*48mm
HY-02-CL02-S24W-*	24W	PC	>0.5	2160LM	3000/4000/6500K	330*330*48mm

AC175-265V



GOLD BLACK WHITE SILVER



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-CL03-12W-*	12W	PP+PMMA/PS	>0.5	960LM	3000/4000/6500K	φ230*30mm
HY-02-CL03-18W-*	18W	PP+PMMA/PS	>0.5	1440LM	3000/4000/6500K	φ300*30mm
HY-02-CL03-24W-*	24W	PP+PMMA/PS	>0.5	1920LM	3000/4000/6500K	φ420*30mm
HY-02-CL03-40W-*	40W	PP+PMMA/PS	>0.9	3200LM	3000/4000/6500K	φ540*35mm

AC175-240V



BLACK WHITE



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-CL04-20W-*	20W	PP	0.5	1600LM	3000/4000/6500K	φ200*55mm
HY-02-CL04-30W-*	30W	PP	0.9	2400LM	3000/4000/6500K	φ300*55mm
HY-02-CL04-40W-*	40W	PP	0.9	3200LM	3000/4000/6500K	φ400*55mm
HY-02-CL04-15W-*	15W	PP	0.5	1500LM	3000/4000/6500K	φ200*55mm
HY-02-CL04-24W-*	24W	PP	0.5	2400LM	3000/4000/6500K	φ300*55mm
HY-02-CL04-36W-*	36W	PP	0.9	3600LM	3000/4000/6500K	φ400*55mm

AC220-240V AC175-240V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-CL07-18W-*	18W	ABS	>0.9	1800LM	3000/4000/6500K	φ230*25mm
HY-02-CL07-24W-*	24W	ABS	>0.9	2400LM	3000/4000/6500K	φ300*25mm
HY-02-CL07-32W-*	32W	ABS	>0.9	3200LM	3000/4000/6500K	φ400*25mm
HY-02-CL07-40W-*	40W	ABS	>0.9	4000LM	3000/4000/6500K	φ500*27mm
HY-02-CL07-50W-*	50W	ABS	>0.9	5000LM	3000/4000/6500K	φ600*27mm
HY-02-CL07-70W-*	70W	ABS	>0.9	7000LM	3000/4000/6500K	φ750*27mm

AC110-277V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-CL05-12W-*	12W	Iron+Ms+Abs	>0.7	960LM	3000/4000/6500K	φ230mm
HY-02-CL05-18W-*	18W	Iron+Ms+Abs	>0.7	1920LM	3000/4000/6500K	φ300mm
HY-02-CL05-24W-*	24W	Iron+Ms+Abs	>0.9	1440LM	3000/4000/6500K	φ350mm
HY-02-CL05-36W-*	36W	Iron+Ms+Abs	>0.9	1920LM	3000/4000/6500K	φ450mm
HY-02-CL05-50W-*	50W	Iron+Ms+Abs	>0.9	3200LM	3000/4000/6500K	φ550mm

AC220-240V AC110-260V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-CL06-12W-*	12W	PC	>0.9	1320LM	3000/4000/6500K	φ260*95mm
HY-02-CL06-18W-*	18W	PC	>0.9	1980LM	3000/4000/6500K	φ300*100mm
HY-02-CL06-24W-*	24W	PC	>0.9	2640LM	3000/4000/6500K	φ350*100mm
HY-02-CL06-36W-*	36W	PC	>0.9	3960LM	3000/4000/6500K	φ400*100mm

AC110-265V AC175-240V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-CL08-12W-*	12W	PP	>0.5	1080LM	3000/4000/6500K	φ230*45mm
HY-02-CL08-18W-*	18W	PP	>0.5	1620LM	3000/4000/6500K	φ280*47mm
HY-02-CL08-24W-*	24W	PP	>0.5	2160LM	3000/4000/6500K	φ380*57mm
HY-02-CL08-36W-*	36W	PP	>0.9	3240LM	3000/4000/6500K	φ380*57mm
HY-02-CL08-45W-*	45W	PP	>0.9	4050LM	3000/4000/6500K	φ480*60mm

AC175-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Cut-Size
HY-02-CL09-18W-*	18W	PP	>0.5	1530LM	3000/4000/6500K	φ280*50mm	/
HY-02-CL09-24W-*	24W	PP	>0.5	2040LM	3000/4000/6500K	φ380*57mm	/
HY-02-CL09-36W-*	36W	PP	>0.9	3060LM	3000/4000/6500K	φ380*57mm	/
HY-02-CL09-45W-*	45W	PP	>0.9	3825LM	3000/4000/6500K	φ496*69mm	/

AC175-265V



Item Code	Wattage	Material	Beam Angle	Lighting Source	Luminous flux	Color temp.	Product size
HY-02-CL10-18W-*	18W	Iron+Plastic	180°	SMD	1440LM	3000K/4000K/6000K	Ø330*H70mm
HY-02-CL10-36W-*	36W	Iron+Plastic	180°	SMD	2880LM	3000K/4000K/6000K	Ø390*H70mm
HY-02-CL10-72W-*	72W	Iron+Plastic	180°	SMD	5760LM	3000K/4000K/6000K	Ø490*H70mm

AC220-240V



Ceiling installation



Pendant installation(E27)



Item Code	Wattage	Material	Beam Angle	Lighting Source	Luminous flux	Color temp.	Product size
HY-02-CL11-12W-*	12W	Iron+Plastic	180°	SMD	960LM	3000K/4000K/6000K	Ø250*H65mm
HY-02-CL11-18W-*	18W	Iron+Plastic	180°	SMD	1440LM	3000K/4000K/6000K	Ø320*H78mm
HY-02-CL11-24W-*	24W	Iron+Plastic	180°	SMD	1920LM	3000K/4000K/6000K	Ø370*H78mm

AC220-240V



LED Big Panel Light



Item Code	Wattage	Material	PF	RA	Luminous flux	Color temp.	Product size
HY-02-PL01-6060-36W-*	36W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	595*595*30mm
HY-02-PL01-6060-40W-*	40W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	595*595*30mm
HY-02-PL01-30120-36W-*	36W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	295*1195*30mm
HY-02-PL01-30120-40W-*	40W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	295*1195*30mm
HY-02-PL01-60120-64W-*	64W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	595*1195*30mm
HY-02-PL01-60120-72W-*	72W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	595*1195*30mm

AC220-240V

AC100-240V



Item Code	Wattage	Material	PF	RA	Luminous flux	Color temp.	Product size
HY-02-PL02-6060-36W-*	36W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	595*595*30mm
HY-02-PL02-6060-40W-*	40W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	595*595*30mm
HY-02-PL02-30120-36W-*	36W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	295*1195*30mm
HY-02-PL02-30120-40W-*	40W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	295*1195*30mm
HY-02-PL02-60120-64W-*	64W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	595*1195*30mm
HY-02-PL02-60120-72W-*	72W	Pure ALU+PS	0.5/0.9	80	100LM/W±10%	2700K-6500K	595*1195*30mm

AC220-240V

AC100-240V



LED Small Panel Light






Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Cut-Size
HY-02-PL03R-R4W-*	4W	flame retardant PP	>0.5	240LM	2700K-6500K	φ98*25.5mm	77-82mm
HY-02-PL03R-R6W-*	6W	flame retardant PP	>0.5	390LM	2700K-6500K	φ118*25.5mm	95-100mm
HY-02-PL03R-R9W-*	9W	flame retardant PP	>0.5	630LM	2700K-6500K	φ145*25.5mm	110-120mm
HY-02-PL03R-R15W-*	15W	flame retardant PP	>0.5	1200LM	2700K-6500K	φ175*26.5mm	140-150mm
HY-02-PL03R-R20W-*	20W	flame retardant PP	>0.5	1800LM	2700K-6500K	φ222*27.5mm	190-200mm
HY-02-PL03R-R24W-*	24W	flame retardant PP	>0.5	1920LM	2700K-6500K	φ295*30mm	275-285mm

AC200-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Cut-Size
HY-02-PL03R-S6W-*	6W	flame retardant PP	>0.5	420LM	2700K-6500K	120*120*26.5mm	95-100mm
HY-02-PL03R-S9W-*	9W	flame retardant PP	>0.5	675LM	2700K-6500K	145*145*26.5mm	110-120mm
HY-02-PL03R-S15W-*	15W	flame retardant PP	>0.5	1200LM	2700K-6500K	175*175*26.5mm	140-150mm
HY-02-PL03R-S20W-*	20W	flame retardant PP	>0.5	2000LM	2700K-6500K	224*224*27.5mm	190-200mm
HY-02-PL03R-S24W-*	24W	flame retardant PP	>0.5	1920LM	2700K-6500K	295*295*30mm	275-285mm

AC200-240V AC185-265V AC110-265V

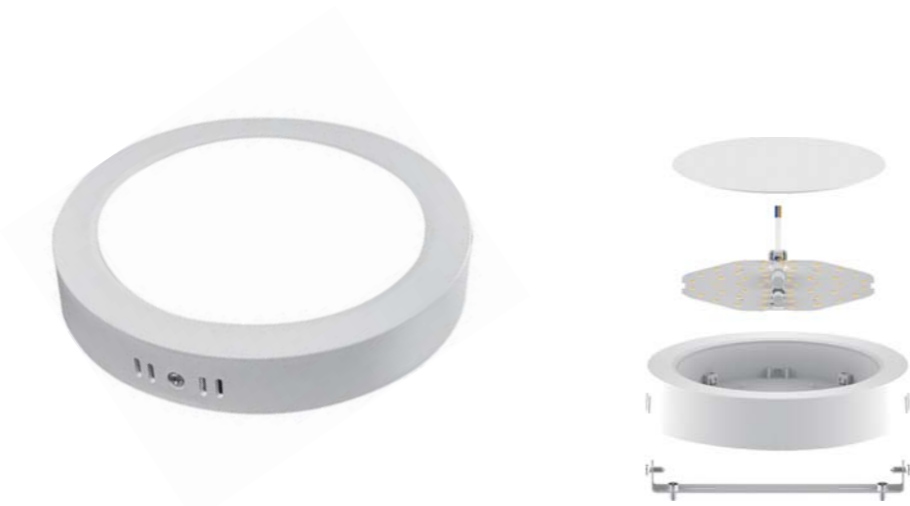

Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Cut-Size
HY-02-PL03C-R6W-*	6W	flame retardant PP	>0.5	420LM	2700K-6500K	φ122*35mm	/
HY-02-PL03C-R12W-*	12W	flame retardant PP	>0.5	960LM	2700K-6500K	φ173*35mm	/
HY-02-PL03C-R18W-*	18W	flame retardant PP	>0.5	1800LM	2700K-6500K	φ226*35mm	/
HY-02-PL03C-R24W-*	24W	flame retardant PP	>0.5	1920LM	2700K-6500K	φ289*38mm	/

AC200-240V AC185-265V AC110-265V




Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Cut-Size
HY-02-PL03C-S6W-*	6W	flame retardant PP	>0.5	420LM	2700K-6500K	122*122*35mm	/
HY-02-PL03C-S12W-*	12W	flame retardant PP	>0.5	960LM	2700K-6500K	173*173*35mm	/
HY-02-PL03C-S18W-*	18W	flame retardant PP	>0.5	1800LM	2700K-6500K	226*226*35mm	/
HY-02-PL03C-S24W-*	24W	flame retardant PP	>0.5	1920LM	2700K-6500K	289*289*38mm	/

AC200-240V AC185-265V AC110-265V



Track Light







Item Code	Input Voltage	Material	Product size	Track type	Installation
HY-02-MAG-TRK-L	DC 48V	Aluminum	W32*H24mm	M20	Surface / Recessed / Trimless / Pendant

DC48V



Item Code	Input Voltage	Material	Product size	Track type	Installation
HY-02-MAG-TRK-HV	DC 48V	Aluminum	W42*H51mm	M20	Surface / Recessed / Trimless / Pendant

DC48V

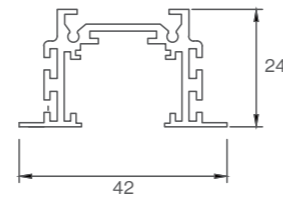


Item Code	Input Voltage	Material	Product size	Track type	Installation
HY-02-MAG-TRK-LV	DC 48V	Aluminum	W42*H24mm	M20	Surface / Recessed / Trimless / Pendant

DC48V




Item Code	Input Voltage	Material	Product size	Track type	Installation
HY-02-MAG-TRK-RTP	DC 48V	Aluminum	80*23*1.2mm	M20	Recessed / Trimless

DC48V

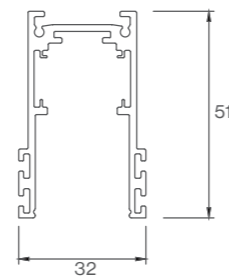

Item Code	Input Voltage	Material	Product size	Track type	Installation
HY-02-MAG-TRK-H	DC 48V	Aluminum	W32*H51mm	M20	Surface / Recessed / Trimless / Pendant

DC48V



Item Code	Input Voltage	Material	Product size	Track type	Installation
HY-02-MAG-TRK-C	DC 48V	Aluminum	D60-240mm	M20	Surface / Recessed / Trimless / Pendant

DC48V




Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-AF11-12W-*	12W	Aluminum + PC	OSRAM	2700K-6500K	≥90	100°	L300*W26*H40mm
HY-02-MAG-AF11-24W-*	24W	Aluminum + PC	OSRAM	2700K-6500K	≥90	100°	L600*W26*H40mm
HY-02-MAG-AF11-36W-*	36W	Aluminum + PC	OSRAM	2700K-6500K	≥90	100°	L900*W26*H40mm
HY-02-MAG-AF11-48W-*	48W	Aluminum + PC	OSRAM	2700K-6500K	≥90	100°	L1200*W26*H40mm

DC48V




Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-AJ11-6W-*	6W	Aluminum	OSRAM	2700K-6500K	≥90	15°/24°/38°	L138*W16*H58mm
HY-02-MAG-AJ11-12W-*	12W	Aluminum	OSRAM	2700K-6500K	≥90	15°/24°/38°	L138*W16*H68mm
HY-02-MAG-AJ11-18W-*	18W	Aluminum	OSRAM	2700K-6500K	≥90	15°/24°/38°	L138*W16*H78mm

DC48V

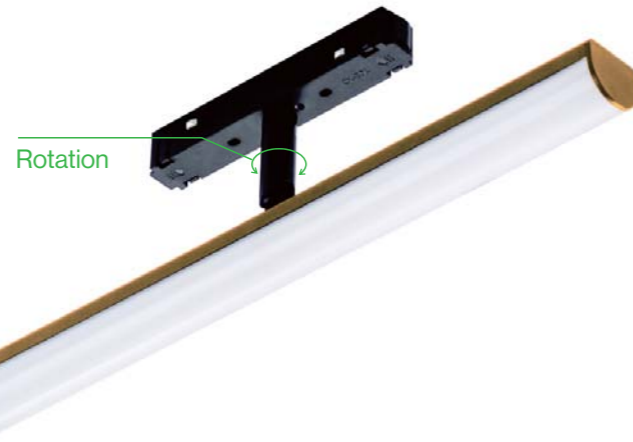


Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-AF12-12W-*	12W	Aluminum + PC	OSRAM	2700K-6500K	≥90	100°	L300*W26*H88mm
HY-02-MAG-AF12-24W-*	24W	Aluminum + PC	OSRAM	2700K-6500K	≥90	100°	L600*W26*H88mm
HY-02-MAG-AF12-36W-*	36W	Aluminum + PC	OSRAM	2700K-6500K	≥90	100°	L900*W26*H88mm
HY-02-MAG-AF12-48W-*	48W	Aluminum + PC	OSRAM	2700K-6500K	≥90	100°	L1200*W26*H88mm

DC48V

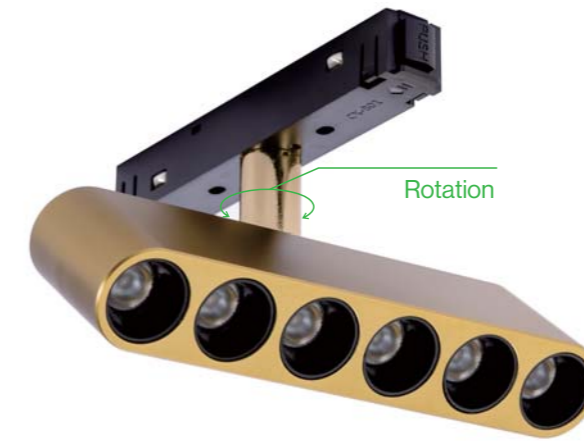

Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-AJ21-6W-*	6W	Aluminum	OSRAM	2700K-6500K	≥90	15°/24°/38°	L138*W16*H95mm
HY-02-MAG-AJ21-12W-*	12W	Aluminum	OSRAM	2700K-6500K	≥90	15°/24°/38°	L138*W16*H105mm
HY-02-MAG-AJ21-18W-*	18W	Aluminum	OSRAM	2700K-6500K	≥90	15°/24°/38°	L138*W16*H115mm

DC48V

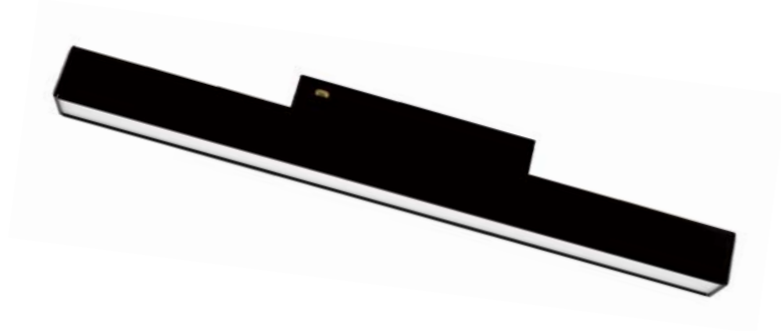

Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-BF11-12W-*	12W	Aluminum	OSRAM	2700K-6500K	≥90	100°	L300*W22*H43mm
HY-02-MAG-BF11-24W-*	24W	Aluminum	OSRAM	2700K-6500K	≥90	100°	L600*W22*H43mm
HY-02-MAG-BF11-36W-*	36W	Aluminum	OSRAM	2700K-6500K	≥90	100°	L900*W22*H43mm
HY-02-MAG-BF11-48W-*	48W	Aluminum	OSRAM	2700K-6500K	≥90	100°	L1200*W22*H43mm

DC48V



Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-MF11-12W-*	12W	Aluminum	OSRAM	2700K-6500K	≥90	100°	L355*W22*H22.5mm
HY-02-MAG-MF11-24W-*	24W	Aluminum	OSRAM	2700K-6500K	≥90	100°	L655*W22*H22.5mm

DC48V



Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-BJ11-6W-*	6W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L112*W22*H45mm
HY-02-MAG-BJ11-12W-*	12W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L220*W22*H45mm
HY-02-MAG-BJ11-18W-*	18W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L330*W22*H45mm
HY-02-MAG-BJ11-24W-*	24W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L436*W22*H45mm
HY-02-MAG-BJ11-36W-*	36W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L653*W22*H45mm

DC48V



Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-MJ11-12W-*	12W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L283*W22*H22.5mm
HY-02-MAG-MJ11-18W-*	18W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L396*W22*H22.5mm
HY-02-MAG-MJ11-24W-*	24W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L510*W22*H22.5mm

DC48V



Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-BF21-6W-*	6W	Aluminum	OSRAM	2700K-6500K	≥90	100°	L119*W22*H83mm
HY-02-MAG-BF21-12W-*	12W	Aluminum	OSRAM	2700K-6500K	≥90	100°	L228*W22*H83mm
HY-02-MAG-BF21-18W-*	18W	Aluminum	OSRAM	2700K-6500K	≥90	100°	L332*W22*H83mm
HY-02-MAG-BF21-24W-*	24W	Aluminum	OSRAM	2700K-6500K	≥90	100°	L445*W22*H83mm

DC48V



Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-MJ31-6W-*	6W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L120*W22*H60mm
HY-02-MAG-MJ31-12W-*	12W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L220*W22*H60mm
HY-02-MAG-MJ31-18W-*	18W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L320*W22*H60mm

DC48V



Item Code	Wattage	Material	LED brand	Color temp.	CRI	Beam angle	Product size
HY-02-MAG-BJ21-6W-*	6W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L119*W22*H83mm
HY-02-MAG-BJ21-12W-*	12W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L228*W22*H83mm
HY-02-MAG-BJ21-18W-*	18W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L332*W22*H83mm
HY-02-MAG-BJ21-24W-*	24W	Aluminum	OSRAM	2700K-6500K	≥90	24°/36°	L445*W22*H83mm

DC48V



Item Code	Wattage	Material	Beam Angle	Lighting Source	Luminous flux	Color temp.	Product Size
HY-02-TK-20W-*	20W	Aluminum	24°	COB	1400LM	3000K/4000K/5700K	D65*150mm
HY-02-TK-30W-*	30W	Aluminum	24°	COB	2100LM	3000K/4000K/5700K	D175*115mm

AC100-265V



Item Code	Wattage	Material	Luminous flux	CRI	Color temp.	IP	Product size
HY-02-ML03-5W-*	5W	PC+ABS	100LM/W	≥80	2700-6500K	44	300*128*66mm
HY-02-ML03-6W-*	6W	PC+ABS	100LM/W	≥80	2700-6500K	44	350*128*66mm
HY-02-ML03-8W-*	8W	PC+ABS	100LM/W	≥80	2700-6500K	44	400*128*66mm
HY-02-ML03-15W-*	15W	PC+ABS	100LM/W	≥80	2700-6500K	44	600*128*66mm
HY-02-ML03-20W-*	20W	PC+ABS	100LM/W	≥80	2700-6500K	44	800*128*66mm

AC220-240V

Mirror Light



Mirror Above



Mirror Side




surface mounted/Stuck




Item Code	Wattage	Material	Luminous flux	CRI	Color temp.	IP	Product size
HY-02-ML01-10W-*	10W	PC+ABS	90LM/W	≥80	2700-6500K	44	378*56*58mm
HY-02-ML01-15W-*	15W	PC+ABS	90LM/W	≥80	2700-6500K	44	578*56*58mm
HY-02-ML01-20W-*	20W	PC+ABS	90LM/W	≥80	2700-6500K	44	778*56*58mm

AC220-240V



Install over cabinet

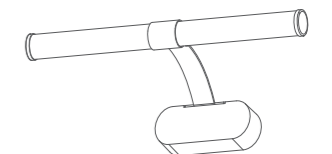

Install over cabinet/on wall (with installation box)



Item Code	Wattage	Material	Luminous flux	CRI	Color temp.	IP	Product size
HY-02-ML02-6W-*	6W	Steel+PC	105LM/W	≥80	2700-6500K	44	400*150*52mm
HY-02-ML02-8W-*	8W	Steel+PC	105LM/W	≥80	2700-6500K	44	600*150*52mm

AC220-240V



Table Light





With standard USB cable



Item Code	Wattage	Material	Color	Battery capacity	Luminous flux	Color temp.	Product size
HY-02-TL-U02C	5W	ABS+PC	White	2000mAh	200LM	4000K	147*45*45mm

DC5V/1A



With standard USB cable



Item Code	Wattage	Material	Color	Battery capacity	Luminous flux	Color temp.	Product size
HY-02-TL-U02	5W	ABS+PC	White	1800mAh	150LM	4000K	61.2*34.3*177mm

DC5V/1A



>280lm/Stand-by time 6 hours
140lm/Stand-by time 12 hours
30lm/Stand-by time >20 hours

With Type-C Cable 1Meter

RED ORANGE YELLOW



Item Code	Wattage	Material	Color	Battery capacity	Luminous flux	Color temp.	Product size
HY-02-TL-VSH45	3W	AL+FE+ABS+PC	Candy colored	LiFePO4 2*18650 1800mA-5200mA	280LM	3000K	140*180*30.3mm

DC5V/1A



With Type-C Cable 1Meter

RED WHITE BLACK YELLOW



Item Code	Wattage	Material	Color	Battery capacity	Luminous flux	Color temp.	Product size
HY-02-TL-VSH47A	3W	AL+FE+ABS+PC	Candy colored	Li-ion 18650 1800mA-5200mA	250LM	3000K	365*110*110mm
HY-02-TL-VSH47B	3W	AL+FE+ABS+PC	Candy colored	Li-ion 18650 1800mA-5200mA	250LM	3000K+RGB	365*110*110mm

DC5V/1A



With Type-C Cable 1m

RED WHITE BLACK YELLOW



Item Code	Wattage	Material	Color	Battery capacity	Luminous flux	Color temp.	Product size
HY-02-TL-VSH56A	3W	AL+FE+ABS+PC	Candy colored	LiFePO4 18650 1800mA-5200mA	250LM	3000K	60*142*215mm
HY-02-TL-VSH56B	3W	AL+FE+ABS+PC	Candy colored	Li-ion 18650 1800mA-5200mA	250LM	3000K+RGB	60*142*215mm

DC5V/1A



With Type-C Cable 1m

RED WHITE BLACK YELLOW



Item Code	Wattage	Material	Color	Battery capacity	Luminous flux	Color temp.	Product size
HY-02-TL-VSH57A	3W	AL+FE+ABS+PC	Candy colored	LiFePO4 18650 1800mA-5200mA	200LM	3000K	140*487mm
HY-02-TL-VSH57B	3W	AL+FE+ABS+PC	Candy colored	Li-ion 18650 1800mA-5200mA	200LM	3000K+RGB	200*887mm

DC5V/1A



With Type-C Cable 1Meter

BLACK WHITE



Item Code	Wattage	Material	Color	Battery capacity	Luminous flux	Color temp.	Product size
HY-02-TL-VSH48A	2.5W	ABS+PC+FE	White/Black	Li-ion 18650 1800mA-1200mA	220LM	3000K	132*286*79mm
HY-02-TL-VSH48B	2.5W	ABS+PC+FE	White/Black	Li-ion 18650 1800mA-1200mA	220LM	3000K+RGB	132*286*79mm

DC5V/1A



- A: Table Lamp
- B: Clip Lamp
- C: Wall Lamp
- D: Three-In-One



With Type-C Cable 1Meter



Item Code	Wattage	Material	Color	Battery capacity	Luminous flux	Color temp.	Product size
HY-02-TL-VSH55A	3W	FE+ABS	Black	Li-ion 18650-1200mAh	220LM	3000K	160*120*420mm
HY-02-TL-VSH55B	3W	FE+ABS	Black	Li-ion 18650-1200mAh	220LM	3000K	140*80*110mm
HY-02-TL-VSH55C	3W	FE+ABS	Black	Li-ion 18650-1200mAh	220LM	3000K	180*80*100mm
HY-02-TL-VSH55D	3W	FE+ABS	Black	Li-ion 18650-1200mAh	220LM	3000K	3IN1

5V/1A



With standard USB cable



Item Code	Wattage	Material	Color	Luminous flux	Battery capacity	Color temp.	Product size
HY-02-TL-U12D-*	5W	ABS+PC	White	>240LM	1500mAh	2700K-6500K	290*95*95mm

DC5V/1A



-With standard power plug

BLACK WHITE



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-U20-*	12W	ABS+PC	White/Black	600LM	3000-5500K	145*145*445mm

AC100-240V



With standard USB cable

BLACK WHITE



Item Code	Wattage	Material	Color	Battery capacity	Luminous flux	Color temp.	Product size
HY-02-TL-U12C	4W	ABS+PC	White/Black	1800mAh	600LM	4000K	106*104*338mm

DC5V/1A



02A: Without Wireless Charging
02B: With Wireless Charging 5W

-With Type-C Cable 1Meter
-Adapter optional

BLACK WHITE



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-VSH02A-*	5W	ABS+PC	White/Black	250LM	3000/4000/6000K	120*160*320mm
HY-02-TL-VSH02B-*	5W	ABS+PC	White/Black	250LM	3000/4000/6000K	120*160*320mm

DC5V/2A



-With Type-C Cable 1Meter
-Adapter optional

BLACK WHITE



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-VSH07-*	5W	ABS+PC	White/Black	>240LM	3000/4000/6000K	120*160*320mm

DC5V/1A



04A: Without Wireless Charging
04B: With Wireless Charging 5W

-With Type-C Cable 1Meter
-Adapter optional

BLACK WHITE



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-VSH04A-*	5W	ABS+PC	White/Black	250LM	3000/4000/6000K	120*160*320mm
HY-02-TL-VSH04B-*	5W	ABS+PC	White/Black	250LM	3000/4000/6000K	120*160*320mm

DC5V/2A



-With Type-C Cable 1Meter
-Adapter optional

BLACK WHITE



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-VSH08-*	5W	ABS+PC	Candy colored	240LM	3000/4000/6000K	120*160*320mm

DC5V/1A



With standard power plug



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-U18TC-*	24W	ABS+PC	White/Black	1200LM	3000-6000K	580*550*310mm

AC100-240V



With standard USB cable



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-U13A	5W	ABS+PC	White/Black	200LM	3800-4500K	148*72*510mm

DC5V/1A



With standard power plug



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-U19TC2-*	18W	ABS+PC	White/Black	1200LM	3000-6000K	700*590*53mm

AC100-240V



With standard power plug



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-U19AC-*	10W	ABS+PC	White/Black	600LM	3000K-6000K	54*70*830mm

AC100-240V



With standard power plug



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-U19TC-*	10W	ABS+PC	White/Black	500LM	3000-6500K	65*450*900mm

AC100-240V




Desk/floor 2IN1
With standard power plug



Item Code	Wattage	Material	Color	Luminous flux	Color temp.	Product size
HY-02-TL-U19JF-K-*	10W	ABS+PC	White/Black	500LM	3000-6500K	60*450*1300mm

AC100-240V

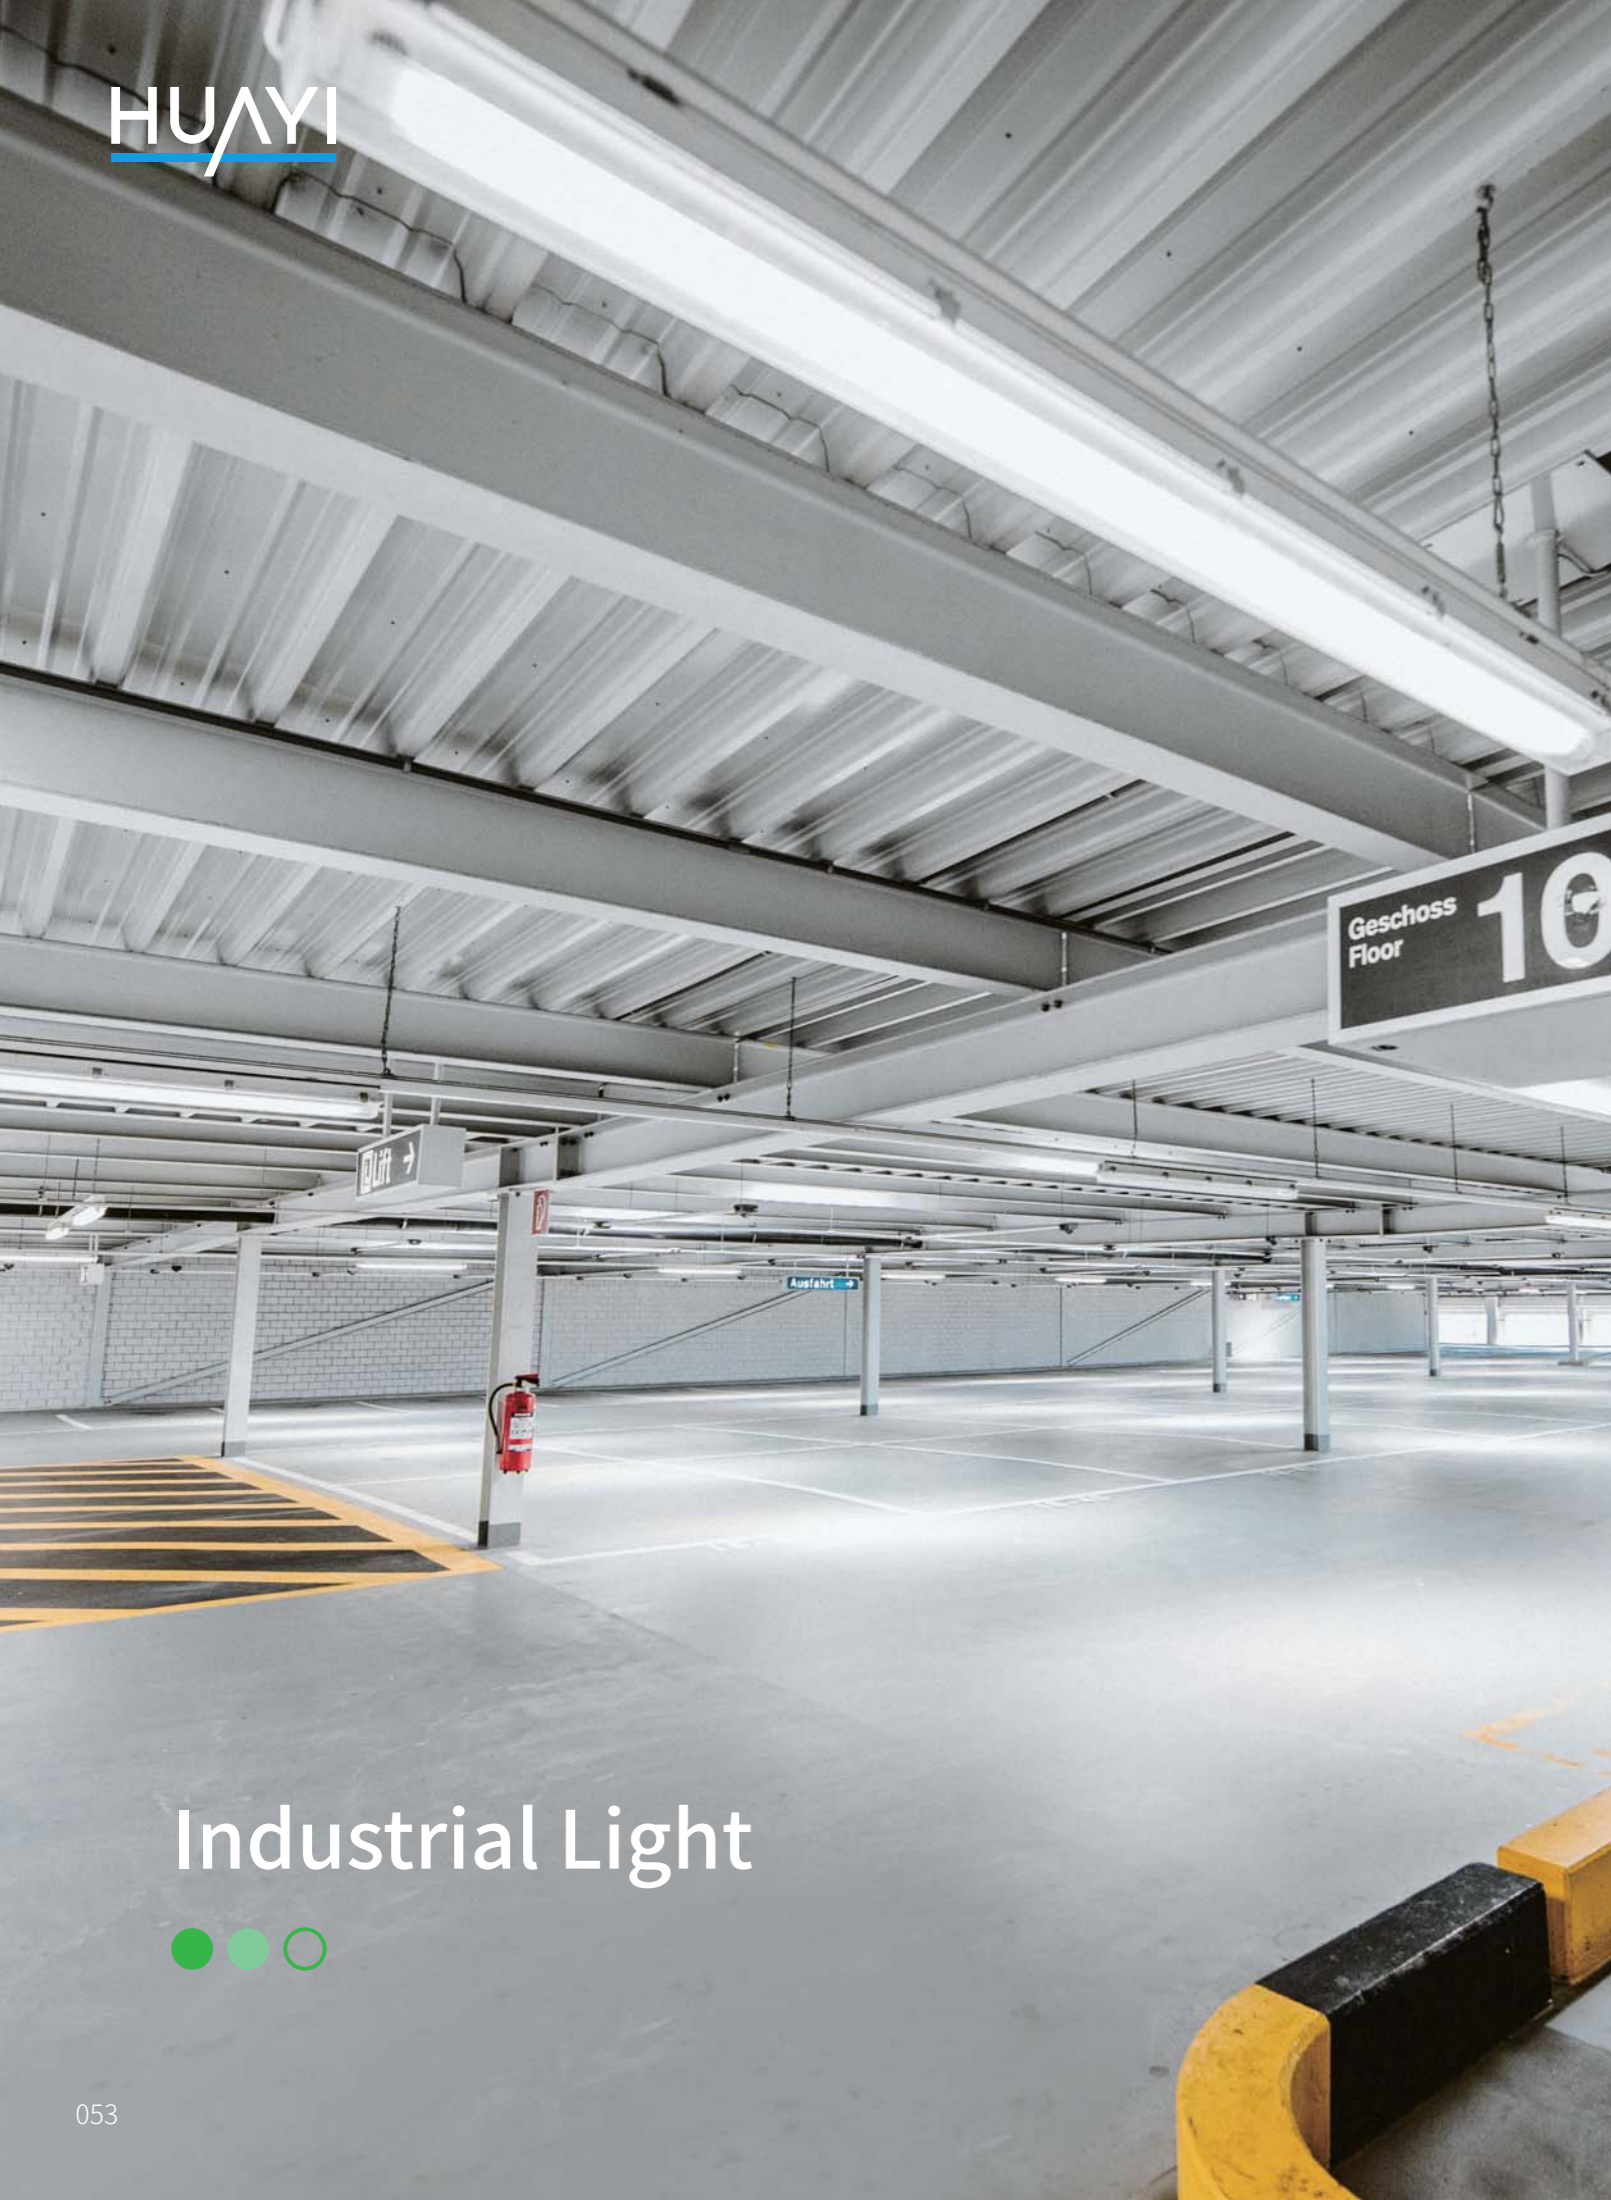

Industrial Light



Option 1:
Empty Fixture for T8 Tube



Option 2:
LED SMD type
High lumen efficiency
100lm/w





Unique design
Innovative fast lock clips
very easy to open and lock



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-TP01-40W-*	40W	PC	0.9	4000LM	2700K-6500K	683*138*84mm
HY-02-TP01-80W-*	80W	PC	0.9	8000LM	2700K-6500K	683*138*84mm

AC220-240V

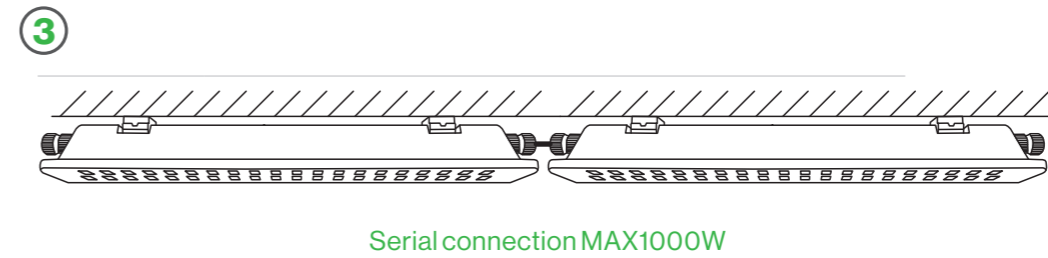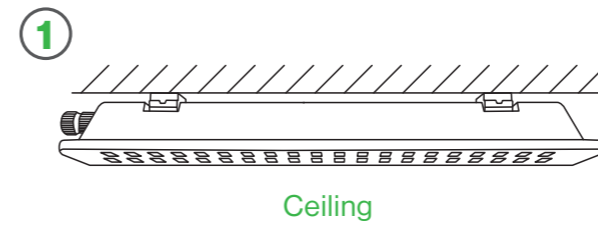

Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-TP02-40W-*	40W	PC+tempered glass	0.9	4000LM	2700K-6500K	606*120*53.2mm
HY-02-TP02-80W-*	80W	PC+tempered glass	0.9	8000LM	2700K-6500K	1147*120*53.2mm

AC220-240V AC100-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-TP03-18W-*	18W	PC+PC	0.95	2700LM	3000K-6500K	580*76*72mm
HY-02-TP03-36W-*	36W	PC+PC	0.95	5400LM	3000K-6500K	1165*76*72mm
HY-02-TP03-50W-*	50W	PC+PC	0.95	7500LM	3000K-6500K	1465*76*72mm

AC220-240V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-TP04-18W-*	18W	PC	0.5	1620LM	3000K-6500K	600*43*38mm
HY-02-TP04-36W-*	36W	PC	0.9	3240LM	3000K-6500K	1200*43*38mm
HY-02-TP04-45W-*	45W	PC	0.9	4050LM	3000K-6500K	1500*43*38mm
HY-02-TP05-18W-*	18W	PC	0.9	1620LM	3000K-6500K	600*70*40mm
HY-02-TP05-36W-*	36W	PC	0.9	3240LM	3000K-6500K	1200*70*40mm
HY-02-TP05-45W-*	45W	PC	0.9	4050LM	3000K-6500K	1500*70*40mm

AC100-277V

AC175-265V

AC110-265V

PIR sensor available



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-TP06-18W-*	18W	PC	0.5	1620LM	3000K-6500K	600*82*48mm
HY-02-TP06-36W-*	36W	PC	0.9	3240LM	3000K-6500K	1200*82*48mm
HY-02-TP06-45W-*	45W	PC	0.9	4050LM	3000K-6500K	1500*82*48mm
HY-02-TP06-60W-*	60W	PC	0.9	5400LM	3000K-6500K	1200*82*48mm
HY-02-TP06-70W-*	70W	PC	0.9	6300LM	3000K-6500K	1500*82*48mm

AC175-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-TP07-18W-*	18W	ABS+PC / PC+PC	0.9	1800LM	3000K-6500K	650*105*71mm
HY-02-TP07-36W-*	36W	ABS+PC / PC+PC	0.9	3500LM	3000K-6500K	1260*105*71mm
HY-02-TP07-48W-*	48W	ABS+PC / PC+PC	0.9	4800LM	3000K-6500K	1560*105*71mm

AC220-240V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-TP08-18W-*	18W	ABS+PC / PC+PC	0.9	1800LM	3000K-6500K	568*70*55mm
HY-02-TP08-36W-*	36W	ABS+PC / PC+PC	0.9	3600LM	3000K-6500K	1168*70*55mm
HY-02-TP08-48W-*	48W	ABS+PC / PC+PC	0.9	4800LM	3000K-6500K	1468*70*55mm

AC220-240V



Item Code	Tube Wattage	Power end	Clips qty	Product size	IP grade	Warranty
HY-02-TP09-20610	1*18W / 1*9W	single/double	6pcs	657*75*88mm	IP65	2 years
HY-02-TP09-21210	1*36W / 1*18W	single/double	10pcs	1257*75*88mm	IP65	2 years
HY-02-TP09-21510	1*58W / 1*24W	single/double	12pcs	1557*75*88mm	IP65	2 years
HY-02-TP09-20620	2*18W / 2*9W	single/double	6pcs	657*116*88mm	IP65	2 years
HY-02-TP09-21220	2*36W / 2*18W	single/double	10pcs	1257*116*88mm	IP65	2 years
HY-02-TP09-21520	2*58W / 2*24W	single/double	12pcs	1557*116*88mm	IP65	2 years



Item Code	Tube Wattage	Power end	Clips qty	Product size	IP grade	Warranty
HY-02-TP11-20610	1*18W / 1*9W	single/double	6pcs	657*67*74mm	IP65	3 years
HY-02-TP11-21210	1*36W / 1*18W	single/double	10pcs	1270*67*74mm	IP65	3 years
HY-02-TP11-21510	1*58W / 1*24W	single/double	12pcs	1567*67*74mm	IP65	3 years
HY-02-TP11-20620	2*18W / 2*9W	single/double	6pcs	657*110*74mm	IP65	3 years
HY-02-TP11-21220	2*36W / 2*18W	single/double	10pcs	1270*110*74mm	IP65	3 years
HY-02-TP11-21520	2*58W / 2*24W	single/double	12pcs	1567*110*74mm	IP65	3 years



Item Code	Tube Wattage	Power end	Clips qty	Product size	IP grade	Warranty
HY-02-TP10-20610	1*18W / 1*9W	single/double	6pcs	648*65*60mm	IP65	2 years
HY-02-TP10-21210	1*36W / 1*18W	single/double	10pcs	1258*65*60mm	IP65	2 years
HY-02-TP10-21510	1*58W / 1*24W	single/double	14pcs	1558*65*60mm	IP65	2 years
HY-02-TP10-20620	2*18W / 2*9W	single/double	6pcs	648*102*60mm	IP65	2 years
HY-02-TP10-21220	2*36W / 2*18W	single/double	10pcs	1258*102*60mm	IP65	2 years
HY-02-TP10-21520	2*58W / 2*24W	single/double	14pcs	1558*102*60mm	IP65	2 years



Item Code	Tube Wattage	Power end	Clips qty	Product size	IP grade	Warranty
HY-02-TP12-20610	1*18W / 1*9W	single/double	6pcs	670*85*60mm	IP65	2 years
HY-02-TP12-21210	1*36W / 1*18W	single/double	12pcs	1280*85*60mm	IP65	2 years
HY-02-TP12-21510	1*58W / 1*24W	single/double	14pcs	1580*85*60mm	IP65	2 years
HY-02-TP12-20620	2*18W / 2*9W	single/double	6pcs	660*110*60mm	IP65	2 years
HY-02-TP12-21220	2*36W / 2*18W	single/double	12pcs	1267*110*60mm	IP65	2 years
HY-02-TP12-21520	2*58W / 2*24W	single/double	14pcs	1565*110*60mm	IP65	2 years



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-BL01-18W-*	18W	Alu+PC	0.5	1800LM	2700K-6500K	600*52*25mm
HY-02-BL01-36W-*	36W	Alu+PC	0.5	3600LM	2700K-6500K	1200*52*25mm
HY-02-BL01-45W-*	45W	Alu+PC	0.5	4500LM	2700K-6500K	1500*52*25mm

AC170-260V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-BL03-18W-*	18W	PC	0.5	1620LM	2700K-6500K	600*76*25mm
HY-02-BL03-36W-*	36W	PC	0.5	3240LM	2700K-6500K	1200*76*25mm
HY-02-BL03-45W-*	45W	PC	0.5	4050LM	2700K-6500K	1500*76*25mm

AC175-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-BL02-18W-*	18W	Metal+PP	0.5	1440LM	2700K-6500K	600*62*25mm
HY-02-BL02-36W-*	36W	Metal+PP	0.5	2880LM	2700K-6500K	1200*62*25mm
HY-02-BL02-45W-*	45W	Metal+PP	0.5	3600LM	2700K-6500K	1500*62*25mm

AC170-260V




Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-BL04-18W-*	18W	Alu+PC	0.5	1620LM	2700K-6500K	600*76*25mm
HY-02-BL04-36W-*	36W	Alu+PC	0.5	3240LM	2700K-6500K	1200*76*25mm
HY-02-BL04-45W-*	45W	Alu+PC	0.5	4050LM	2700K-6500K	1500*76*25mm

AC175-265V



CCT | Microwave Sensor | Emergency Type

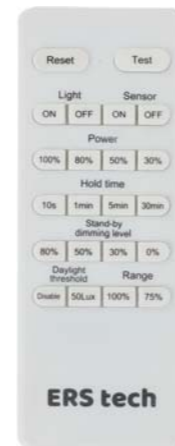

Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-BL05-20W-*	20W	Metal+PC	0.9	2400LM	3000K/4000K/6500K	700*65*72mm
HY-02-BL05-40W-*	40W	Metal+PC	0.9	4800LM	3000K/4000K/6500K	1170*65*72mm
HY-02-BL05-60W-*	60W	Metal+PC	0.9	7200LM	3000K/4000K/6500K	1470*65*72mm
HY-02-BL06-40W-*	40W	Metal+PC	0.9	4800LM	3000K/4000K/6500K	700*83*72mm
HY-02-BL06-60W-*	60W	Metal+PC	0.9	7200LM	3000K/4000K/6500K	1170*83*72mm
HY-02-BL06-80W-*	80W	Metal+PC	0.9	9600LM	3000K/4000K/6500K	1470x83x72mm

AC175-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-BL07-4W-*	4W	PC	0.5	360LM	2700K-6500K	304*22*36mm
HY-02-BL07-8W-*	8W	PC	0.5	720LM	2700K-6500K	575*22*36mm
HY-02-BL07-12W-*	12W	PC	0.5	1080LM	2700K-6500K	875*22*36mm
HY-02-BL07-16W-*	16W	PC	0.5	1440LM	2700K-6500K	1175*22*36mm
HY-02-BL07-20W-*	20W	PC	0.5	1980LM	2700K-6500K	1475*22*36mm

AC165-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-02-BL08-5W-*	5W	PC	0.5	425LM	2700K-6500K	310*22*36mm
HY-02-BL08-9W-*	9W	PC	0.5	765LM	2700K-6500K	560*22*36mm
HY-02-BL08-12W-*	12W	PC	0.5	1020LM	2700K-6500K	880*22*36mm
HY-02-BL08-18W-*	18W	PC	0.5	1530LM	2700K-6500K	1180*22*36mm

AC165-265V

LIGHT SOURCE



A60



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-A60-5W-*	5W	ALU+PC	>0.5	450LM	2700K-6500K	Φ60*108mm	E27/B22
HY-03-A60-7W-*	7W	ALU+PC	>0.5	630LM	2700K-6500K	Φ60*108mm/Φ55*100mm	E27/B22
HY-03-A60-9W-*	9W	ALU+PC	>0.5	820LM	2700K-6500K	Φ60*108mm	E27/B22
HY-03-A60-10W-*	10W	ALU+PC	>0.5	900LM	2700K-6500K	Φ60*112mm	E27/B22
HY-03-A60-12W-*	12W	ALU+PC	>0.5	1080LM	2700K-6500K	Φ60*112mm	E27/B22
HY-03-A60-15W-*	15W	ALU+PC	>0.5	1350LM	2700K-6500K	Φ60*118mm	E27/B22

AC220-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-A70-18W-*	18W	ALU+PC	>0.5	1620LM	2700K-6500K	Φ70*132mm	E27/B22
HY-03-A80-20W-*	20W	ALU+PC	>0.5	1800LM	2700K-6500K	Φ80*150mm	E27/B22
HY-03-A95-25W-*	25W	ALU+PC	>0.5	2250LM	2700K-6500K	Φ95*175mm	E27/B22

AC220-240V AC185-265V AC110-265V



GU10&MR16



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Beam Angle
HY-03-GU10-3W-*	3W	Plastic + ALU+PC cover	>0.5	230LM	3000K-6500K	Φ50*55mm	38°/100°
HY-03-GU10-5W-*	5W	Plastic + ALU+PC cover	>0.5	370LM	3000K-6500K	Φ50*55mm	38°/100°
HY-03-GU10-6W-*	6W	Plastic + ALU+PC cover	>0.5	450LM	3000K-6500K	Φ50*55mm	38°/100°
HY-03-GU10-7W-*	7W	Plastic + ALU+PC cover	>0.5	595LM	3000K-6500K	Φ50*55mm	38°/100°

AC220-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Beam Angle
HY-03-MR16-3W-*	3W	Plastic + ALU+PC cover	>0.5	250LM	3000K-6500K	Φ50*53mm	38°/100°
HY-03-MR16-5W-*	5W	Plastic + ALU+PC cover	>0.5	400LM	3000K-6500K	Φ50*53mm	38°/100°
HY-03-MR16-6W-*	6W	Plastic + ALU+PC cover	>0.5	420LM	3000K-6500K	Φ50*53mm	38°/100°
HY-03-MR16-7W-*	7W	Plastic + ALU+PC cover	>0.5	550LM	3000K-6500K	Φ50*53mm	38°/100°

AC220-240V AC185-265V AC110-265V



LED Filament



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-C35/C35L-F-2W-*	2W	Glass	>0.5	220LM	2700K-6500K	Φ35*98mm/Φ35*117mm	E14
HY-03-C35/C35L-F-4W-*	4W	Glass	>0.5	470LM	2700K-6500K	Φ35*98mm/Φ35*117mm	E14
HY-03-C35/C35L-F-5W-*	5W	Glass	>0.5	600LM	2700K-6500K	Φ35*98mm/Φ35*117mm	E14
HY-03-C35/C35L-F-6W-*	6W	Glass	>0.5	806LM	2700K-6500K	Φ35*98mm/Φ35*117mm	E14

AC220-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-A60-F-4W-*	4W	Glass	>0.5	400LM	3000K-6500K	Φ60*108mm	E27/B22
HY-03-A60-F-7W-*	7W	Glass	>0.5	800LM	3000K-6500K	Φ60*108mm	E27/B22
HY-03-A60-F-8W-*	8W	Glass	>0.5	1050LM	3000K-6500K	Φ60*108mm	E27/B22
HY-03-A60-F-11W-*	11W	Glass	>0.5	1521LM	3000K-6500K	Φ60*108mm	E27/B22

AC220-240V AC185-265V AC110-265V



C37&G45



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-C37-3W-*	3W	Plastic + ALU+PC cover	>0.5	250LM	3000K-6500K	Φ37*98mm/Φ37*124mm	E27/E14
HY-03-C37-5W-*	5W	Plastic + ALU+PC cover	>0.5	400LM	3000K-6500K	Φ37*98mm/Φ37*124mm	E27/E14
HY-03-C37-6W-*	6W	Plastic + ALU+PC cover	>0.5	510LM	3000K-6500K	Φ37*98mm/Φ37*124mm	E27/E14
HY-03-C37-7W-*	7W	Plastic + ALU+PC cover	>0.5	600LM	3000K-6500K	Φ37*98mm/Φ37*124mm	E27/E14

AC220-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-G45-3W-*	3W	Plastic + ALU+PC cover	>0.5	250LM	3000K-6500K	Φ45*80mm	E27/E14
HY-03-G45-5W-*	5W	Plastic + ALU+PC cover	>0.5	400LM	3000K-6500K	Φ45*80mm	E27/E14
HY-03-G45-6W-*	6W	Plastic + ALU+PC cover	>0.5	510LM	3000K-6500K	Φ45*80mm	E27/E14
HY-03-G45-7W-*	7W	Plastic + ALU+PC cover	>0.5	600LM	3000K-6500K	Φ45*80mm	E27/E14

AC220-240V AC185-265V AC110-265V



G4&G9





Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-G4-002-*	2W	Silicon	>0.5	150LM	2700K-6500K	Φ10*37mm	G4
HY-03-G4-003-*	2W	Silicon	>0.5	220LM	2700K-6500K	Φ13*37mm	G4
HY-03-G4-004-*	1.5W	Silicon	>0.5	150LM	2700K-6500K	Φ10*37mm	G4
HY-03-G4-005-*	2W	Silicon	>0.5	230LM	2700K-6500K	Φ12.5*41mm	G4
HY-03-G4-008-*	1.2W	PC	>0.5	120LM	2700K-6500K	Φ16*45mm	G4

AC/DC12V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-DIM-G9TC-027-*	3W	Ceramic+PC	>0.5	300LM	2700K-6500K	Φ17*50mm	G9
HY-03-DIM-G9TC-019-*	3.7W	Ceramic+PC	>0.5	360LM	2700K-6500K	Φ19*55mm	G9
HY-03-G9COB-001-*	2W	Glass	>0.5	230LM	2700K-6500K	Φ14*60mm	G9
HY-03-G9COB-002-*	3.8W	Glass	>0.5	450LM	2700K-6500K	Φ14*60mm	G9
HY-03-G9SL-007-*	2W	PC	>0.5	170LM	2700K-6500K	Φ16*48mm	G9
HY-03-G9SL-008-*	3W	PC	>0.5	330LM	2700K-6500K	Φ16*60mm	G9
HY-03-G9TC-002-*	3.5W	Ceramic+PC	>0.5	350LM	2700K-6500K	Φ17*50mm	G9

AC220-240V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-E14-002-*	1.6W	Ceramic+PC	>0.5	120LM	2700K-6500K	Φ22*51mm	E14
HY-03-E14-005-*	3.5W	Ceramic+PC	>0.5	350LM	2700K-6500K	Φ16*54mm	E14

AC220-240V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-R7S-78-*	7.5W	Aluminum+PC	>0.5	850LM	2700K-6500K	Φ28*78mm	R7S
HY-03-R7S-118-*	13.5W	Aluminum+PC	>0.5	1800LM	2700K-6500K	Φ28*118mm	R7S
HY-03-R7SCOB-78-*	3.8W	Glass	>0.5	450LM	2700K-6500K	Φ16*78mm	R7S
HY-03-R7SCOB-118-*	7.5W	Glass	>0.5	800LM	2700K-6500K	Φ16*118mm	R7S

AC220-240V



G Lights



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-G95-15W-*	15W	ALU+PC	>0.5	1350LM	2700K-6500K	Φ95*140mm	E27/B22
HY-03-G120-20W-*	20W	ALU+PC	>0.5	1800LM	2700K-6500K	Φ120*160mm	E27/B22

AC220-240V AC185-265V AC110-265V



R/Par Lights



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-R63-8W-*	8W	ALU+PC	>0.5	720LM	2700K-6500K	Φ63*100mm	E27/B22
HY-03-R80-12W-*	12W	ALU+PC	>0.5	1080LM	2700K-6500K	Φ80*115mm	E27/B22

AC220-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-PAR20-9W-*	9W	ALU+PC	>0.5	806LM	2700K-6500K	Φ63.5*83mm	E27/B22
HY-03-PAR30-12W-*	12W	ALU+PC	>0.5	1055LM	2700K-6500K	Φ95*115mm	E27/B22
HY-03-PAR38-15W-*	15W	ALU+PC	>0.5	1250LM	2700K-6500K	Φ120*135mm	E27/B22

AC220-240V AC185-265V AC110-265V



T Lights



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-T140-70W-*	70W	ALU+PC	>0.5	6000LM	2700K-6500K	Φ140*240mm	E27/B22/E40
HY-03-T140-80W-*	80W	ALU+PC	>0.5	7000LM	2700K-6500K	Φ140*240mm	E27/B22/E40

AC220-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-T80-20W-*	20W	ALU+PC	>0.5	1600LM	2700K-6500K	Φ80*118mm	E27/B22
HY-03-T100-30W-*	30W	ALU+PC	>0.5	2400LM	2700K-6500K	Φ100*148mm	E27/B22
HY-03-T120-40W-*	40W	ALU+PC	>0.5	3200LM	2700K-6500K	Φ120*170mm	E27/B22
HY-03-T140-50W-*	50W	ALU+PC	>0.5	4000LM	2700K-6500K	Φ140*194mm	E27/B22

AC220-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-T150-100W-*	100W	ALU+PC	>0.5	9000LM	2700K-6500K	Φ150*255mm	E27/B22/E40
HY-03-T150-120W-*	120W	ALU+PC	>0.5	11000LM	2700K-6500K	Φ150*270mm	E27/B22/E40
HY-03-T170-140W-*	140W	ALU+PC	>0.5	14000LM	2700K-6500K	Φ170*280mm	E27/B22/E40

AC220-240V AC185-265V AC110-265V



IR
Sensor



Radar
Sensor




Photocell
Sensor



Wi-Fi
Control



BT Mesh
Control





Item Code	Wattage	Luminous Efficiency	PF	Color Temperature	Light Size (mm)	Reflector Size (mm)
HY-03-RS1-PC	65W/80W/100W/150W	130LM/W	0.5/0.9	3000K / 4000K / 6500K	Φ200*275	Φ398*295
HY-03-RS1-D-PC	65W/80W/100W/150W	130LM/W	0.5/0.9	3000K / 4000K / 6500K	Φ200*238	Φ398*295
HY-03-RS1-LENS	65W/80W/100W/150W	130LM/W	0.5/0.9	3000K / 4000K / 6500K	Φ200*209	Φ398*229
HY-03-RS1-D-LENS	65W/80W/100W/150W	130LM/W	0.5/0.9	3000K / 4000K / 6500K	Φ200*172	Φ398*229

AC100-277V AC185-265V



Item Code	Wattage	Luminous Efficiency	PF	Color Temperature	Light Size (mm)	Reflector Size (mm)
HY-03-RS1-S-PC	65W/80W/100W/150W	130LM/W	0.9	3000K / 4000K / 6500K	Φ200*283	Φ398*295
HY-03-RS1-SD-PC	65W/80W/100W/150W	130LM/W	0.9	3000K / 4000K / 6500K	Φ200*245	Φ398*295
HY-03-RS1-S-LENS	65W/80W/100W/150W	130LM/W	0.9	3000K / 4000K / 6500K	Φ200*216	Φ398*229
HY-03-RS1-SD-LENS	65W/80W/100W/150W	130LM/W	0.9	3000K / 4000K / 6500K	Φ200*179	Φ398*229

AC100-277V



Item Code	Wattage	Luminous Efficiency	PF	Color Temperature	Light Size(mm)	Installation
HY-03-WP1-01-36W-*	36W	130LM/W	0.9	3000K / 4000K / 6500K	Φ90*272	E40/E39/E27/E26/B22
HY-03-WP1-02-36W-*	36W	130LM/W	0.9	3000K / 4000K / 6500K	Φ90*272	E40/E39/E27/E26/B22
HY-03-WP1-S36W-*	36W	130LM/W	0.9	3000K / 4000K / 6500K	Φ90*283	E40/E39/E27/E26/B22

AC100-277V



Item Code	Wattage	Luminous Efficiency	PF	Color Temperature	Light Size(mm)	Installation
HY-03-WP2-30W-*	30W	130LM/W	0.9	3000K / 4000K / 6500K	Φ90*275	E40/E39/E27/E26/B22
HY-03-WP2-40W-*	40W	130LM/W	0.9	3000K / 4000K / 6500K	Φ90*275	E40/E39/E27/E26/B22
HY-03-WP2-50W-*	50W	130LM/W	0.9	3000K / 4000K / 6500K	Φ90*275	E40/E39/E27/E26/B22

AC100-277V



LED Tube



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-T8-9W-G-*	9W	Glass	>0.5	900LM	2700K-6500K	Φ26*600mm	G13
HY-03-T8-18W-G-*	18W	Glass	>0.5	1800LM	2700K-6500K	Φ26*1200mm	G13
HY-03-T8-22W-G-*	22W	Glass	>0.5	2200LM	2700K-6500K	Φ26*1500mm	G13

AC220-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-T8-9W-AL-*	9W	Aluminum + PC	>0.5	810LM	2700K-6500K	Φ28*600mm	G13
HY-03-T8-18W-AL-*	18W	Aluminum + PC	>0.5	1620LM	2700K-6500K	Φ28*1200mm	G13
HY-03-T8-22W-AL-*	22W	Aluminum + PC	>0.5	1980LM	2700K-6500K	Φ28*1500mm	G13

AC220-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Surge	Power-in
HY-03-T5-9W-*	9W	Glass	0.9	900LM	2700K-6500K	1000V	Single-ended
HY-03-T5-18W-*	18W	Glass	0.9	1800LM	2700K-6500K	1000V	Single-ended
HY-03-T5-22W-*	22W	Glass	0.9	2200LM	2700K-6500K	1000V	Single-ended

AC220-240V AC185-265V AC110-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size	Lamp base
HY-03-T8-9W-PC-*	9W	PC	>0.5	810LM	2700K-6500K	Φ26*600mm	G13
HY-03-T8-18W-PC-*	18W	PC	>0.5	1620LM	2700K-6500K	Φ26*1200mm	G13
HY-03-T8-22W-PC-*	22W	PC	>0.5	1980LM	2700K-6500K	Φ26*1500mm	G13

AC220-240V AC185-265V AC110-265V

OUTDOOR



PIR Senor

Detect motion and activate the light, providing automatic and energy-efficient security lighting.



Item Code	Wattage	Material	PF	LED Chips	Luminous flux	Color temp.	Product size
HY-01-FL01-10W-*	10W	Die casting aluminum	0.9	12pcs	80LM/W	3000K/4000K/6000K	103*83*24mm
HY-01-FL01-20W-*	20W	Die casting aluminum	0.9	24pcs	80LM/W	3000K/4000K/6000K	124*100*24mm
HY-01-FL01-30W-*	30W	Die casting aluminum	0.9	36pcs	80LM/W	3000K/4000K/6000K	159*122*26mm
HY-01-FL01-50W-*	50W	Die casting aluminum	0.9	56pcs	80LM/W	3000K/4000K/6000K	205*160*34mm
HY-01-FL01-100W-*	100W	Die casting aluminum	0.9	112pcs	80LM/W	3000K/4000K/6000K	270*210*34mm
HY-01-FL01-150W-*	150W	Die casting aluminum	0.9	168pcs	80LM/W	3000K/4000K/6000K	326*246*37mm
HY-01-FL01-200W-*	200W	Die casting aluminum	0.9	224pcs	80LM/W	3000K/4000K/6000K	380*280*46mm
HY-01-FL01-250W-*	250W	Die casting aluminum	0.9	280pcs	80LM/W	3000K/4000K/6000K	445*335*46mm
HY-01-FL01-300W-*	300W	Die casting aluminum	0.9	336pcs	80LM/W	3000K/4000K/6000K	445*335*46mm
HY-01-FL01-400W-*	400W	Die casting aluminum	0.9	420pcs	120LM/W	3000K/4000K/6000K	490*370*50mm

AC220-240V AC100-265V DC12-36V



breather valve

keep balance of the air pressure inside&outside



Item Code	Wattage	Material	PF	LED Chips	Luminous flux	Color temp.	Product size
HY-01-FL02-10W-*	10W	Die casting aluminum	0.9	12pcs	80LM/W	3000K/4000K/6000K	92*80*24mm
HY-01-FL02-20W-*	20W	Die casting aluminum	0.9	24pcs	80LM/W	3000K/4000K/6000K	120*115*24mm
HY-01-FL02-30W-*	30W	Die casting aluminum	0.9	36pcs	80LM/W	3000K/4000K/6000K	155*125*24mm
HY-01-FL02-50W-*	50W	Die casting aluminum	0.9	56pcs	80LM/W	3000K/4000K/6000K	200*165*33mm
HY-01-FL02-100W-*	100W	Die casting aluminum	0.9	112pcs	80LM/W	3000K/4000K/6000K	260*205*35mm
HY-01-FL02-150W-*	150W	Die casting aluminum	0.9	180pcs	80LM/W	3000K/4000K/6000K	320*240*35mm
HY-01-FL02-200W-*	200W	Die casting aluminum	0.9	240pcs	80LM/W	3000K/4000K/6000K	375*280*40mm
HY-01-FL02-250W-*	250W	Die casting aluminum	0.9	280pcs	80LM/W	3000K/4000K/6000K	440*325*46mm
HY-01-FL02-300W-*	300W	Die casting aluminum	0.9	336pcs	80LM/W	3000K/4000K/6000K	440*325*46mm
HY-01-FL02-400W-*	400W	Die casting aluminum	0.9	420pcs	80LM/W	3000K/4000K/6000K	480*350*52mm

AC220-240V AC100-265V DC12-36V



Item Code	Wattage	Material	Surge	PF	LED	Luminous flux	Color temp.	Product size
HY-01-FL03-50W-*	50W	Alu.+glass+reflector	4KV	0.95	SMD2835	5500LM	3000K-6500K	190*160*30mm
HY-01-FL03-100W-*	100W	Alu.+glass+reflector	6KV	0.95	SMD2835	11000LM	3000K-6500K	280*240*30mm
HY-01-FL03-150W-*	150W	Alu.+glass+reflector	6KV	0.95	SMD2835	16500LM	3000K-6500K	350*270*36mm
HY-01-FL03-200W-*	200W	Alu.+glass+reflector	6KV	0.95	SMD2835	22000LM	3000K-6500K	350*270*36mm
HY-01-FL03-300W-*	300W	Alu.+glass+reflector	6KV	0.95	SMD2835	32000LM	3000K-6500K	468*358*40mm

AC220-240V



Item Code	Wattage	Material	PF	LED Chips	Luminous flux	Color temp.	Product size
HY-01-FL05-50W	50W	Aluminum+PC	>0.55	60pcs	5000LM	6000K-6500K	235*27*195mm
HY-01-FL05-100W	100W	Aluminum+PC	>0.55	120pcs	10000LM	6000K-6500K	295*233*26mm
HY-01-FL05-150W	150W	Aluminum+PC	>0.55	180pcs	15000LM	6000K-6500K	358*27*272mm
HY-01-FL05-200W	200W	Aluminum+PC	>0.55	240pcs	20000LM	6000K-6500K	385*27*328mm

AC100-265V





Item Code	Wattage	Material	PF	LED Chips	Luminous flux	Color temp.	Product size
HY-01-FL04-10W	10W	Aluminum+PC	>0.6	12pcs	1000LM	RGB with remote control	130*25*100mm
HY-01-FL04-20W	20W	Aluminum+PC	>0.6	24pcs	2000LM	RGB with remote control	150*25*130mm
HY-01-FL04-30W	30W	Aluminum+PC	>0.6	36pcs	3000LM	RGB with remote control	162*25*135mm
HY-01-FL04-50W	50W	Aluminum+PC	>0.6	72pcs	5000LM	RGB with remote control	190*25*165mm
HY-01-FL04-100W	100W	Aluminum+PC	>0.6	144pcs	10000LM	RGB with remote control	230*25*195mm
HY-01-FL04-150W	150W	Aluminum+PC	>0.6	180pcs	15000LM	RGB with remote control	255*25*210mm
HY-01-FL04-200W	200W	Aluminum+PC	>0.6	288pcs	15000LM	RGB with remote control	315*25*220mm


AC100-265V




LED Bulkhead

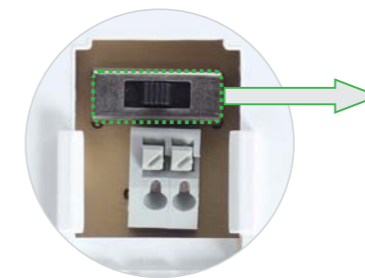


Dial switch on the back of the lamp
Just dial it to reach the color temperature you want
Save stock, save cost



3000K

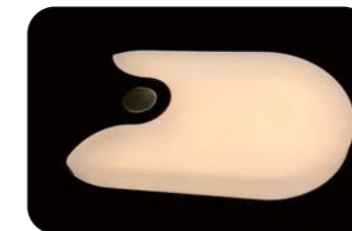

4000K

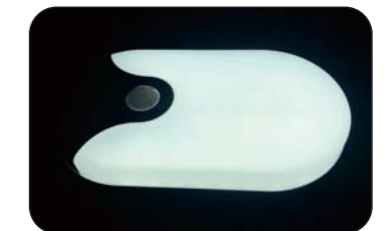

6000K



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-01-BH06-ROUND-12W-*	12W	PC	0.5	960LM	3000-6000K	φ173*67mm
HY-01-BH06-OVAL-12W-*	12W	PC	0.5	960LM	3000-6000K	215*120*67mm
HY-01-BH06-ROUND-S12W-*	12W	PC	0.5	960LM	3000-6000K	φ173*67mm
HY-01-BH06-OVAL-S12W-*	12W	PC	0.5	960LM	3000-6000K	215*120*67mm

AC175-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-01-BH01-OVAL-8W-*	8W	PP+PP	0.5	720LM	3000-6500K	155*80*55mm
HY-01-BH01-OVAL-12W-*	12W	PP+PP	0.5	1080LM	3000-6500K	174*87*55mm
HY-01-BH01-OVAL-18W-*	18W	PP+PP	0.5	1620LM	3000-6500K	198*98*55mm
HY-01-BH01-OVAL-24W-*	24W	PP+PP	0.5	2160LM	3000-6500K	250*120*55mm
HY-01-BH01-ROUND-8W-*	8W	PP+PP	0.5	640LM	3000-6500K	140*55mm
HY-01-BH01-ROUND-12W-*	12W	PP+PP	0.5	960LM	3000-6500K	150*55mm
HY-01-BH01-ROUND-18W-*	18W	PP+PP	0.5	960LM	3000-6500K	175*55mm
HY-01-BH01-ROUND-24W-*	24W	PP+PP	0.5	1200LM	3000-6500K	220*55mm

AC100-265V



Item Code	Wattage	Material	PF	Luminous flux	Color temp.	Product size
HY-01-BH02-OVAL-8W-*	8W	PP+PP	0.5	640LM	3000K-6500K	170*70*50mm
HY-01-BH02-OVAL-15W-*	15W	PP+PP	0.5	1200LM	3000K-6500K	210*100*60mm
HY-01-BH02-OVAL-18W-*	18W	PP+PP	0.5	1440LM	3000K-6500K	270*130*65mm
HY-01-BH02-ROUND-8W-*	8W	PP+PP	0.5	640LM	3000K-6500K	140*50mm
HY-01-BH02-ROUND-15W-*	15W	PP+PP	0.5	1200LM	3000K-6500K	170*55mm
HY-01-BH02-ROUND-18W-*	18W	PP+PP	0.5	1440LM	3000K-6500K	205*65mm

AC100-265V




Item Code	Wattage	Material	PF	LED/QTY	Luminous flux	Color temp.	Product size
HY-01-BH03-OVAL-8W-*	8W	PP+PP	0.5	28	720LM	3000-6500K	170*80*35mm
HY-01-BH03-OVAL-15W-*	15W	PP+PP	0.5	46	1350LM	3000-6500K	200*95*35mm
HY-01-BH03-ROUND-8W-*	8W	PP+PP	0.5	28	720LM	3000-6500K	φ140*35mm
HY-01-BH03-ROUND-15W-*	15W	PP+PP	0.5	46	1350LM	3000-6500K	φ175*35mm
HY-01-BH04-OVAL-8W-*	8W	PP+PP	0.5	24	560LM	3000-6500K	170*80*35mm
HY-01-BH04-OVAL-12W-*	12W	PP+PP	0.5	24	840LM	3000-6500K	170*80*35mm
HY-01-BH04-OVAL-18W-*	18W	PP+PP	0.5	39	1260LM	3000-6500K	200*95*35mm
HY-01-BH04-ROUND-8W-*	8W	PP+PP	0.5	26	560LM	3000-6500K	φ140*35mm
HY-01-BH04-ROUND-12W-*	12W	PP+PP	0.5	26	840LM	3000-6500K	φ140*35mm
HY-01-BH04-ROUND-18W-*	18W	PP+PP	0.5	39	1260LM	3000-6500K	φ175*35mm

AC220-240V



Item Code	Wattage	Material	PF	Light Source	Luminous flux	Color temp.	Product size
HY-01-BH05-ROUND-6W-*	6W	Aluminum+Glass	0.5	E27 Holder	480LM	3000K-6500K	φ75*H90mm
HY-01-BH05-ROUND-9W-*	9W	Aluminum+Glass	0.5	E27 Holder	720LM	3000K-6500K	φ75*H90mm
HY-01-BH05-ROUND-12W-*	12W	Aluminum+Glass	0.5	E27 Holder	960LM	3000K-6500K	φ240*H112mm
HY-01-BH05-OVAL-6W-*	6W	Aluminum+Glass	0.5	E27 Holder	480LM	3000K-6500K	210*106*90mm
HY-01-BH05-OVAL-9W-*	9W	Aluminum+Glass	0.5	E27 Holder	720LM	3000K-6500K	210*106*90mm
HY-01-BH05-OVAL-12W-*	12W	Aluminum+Glass	0.5	E27 Holder	960LM	3000K-6500K	278*160*120mm

AC220-240V

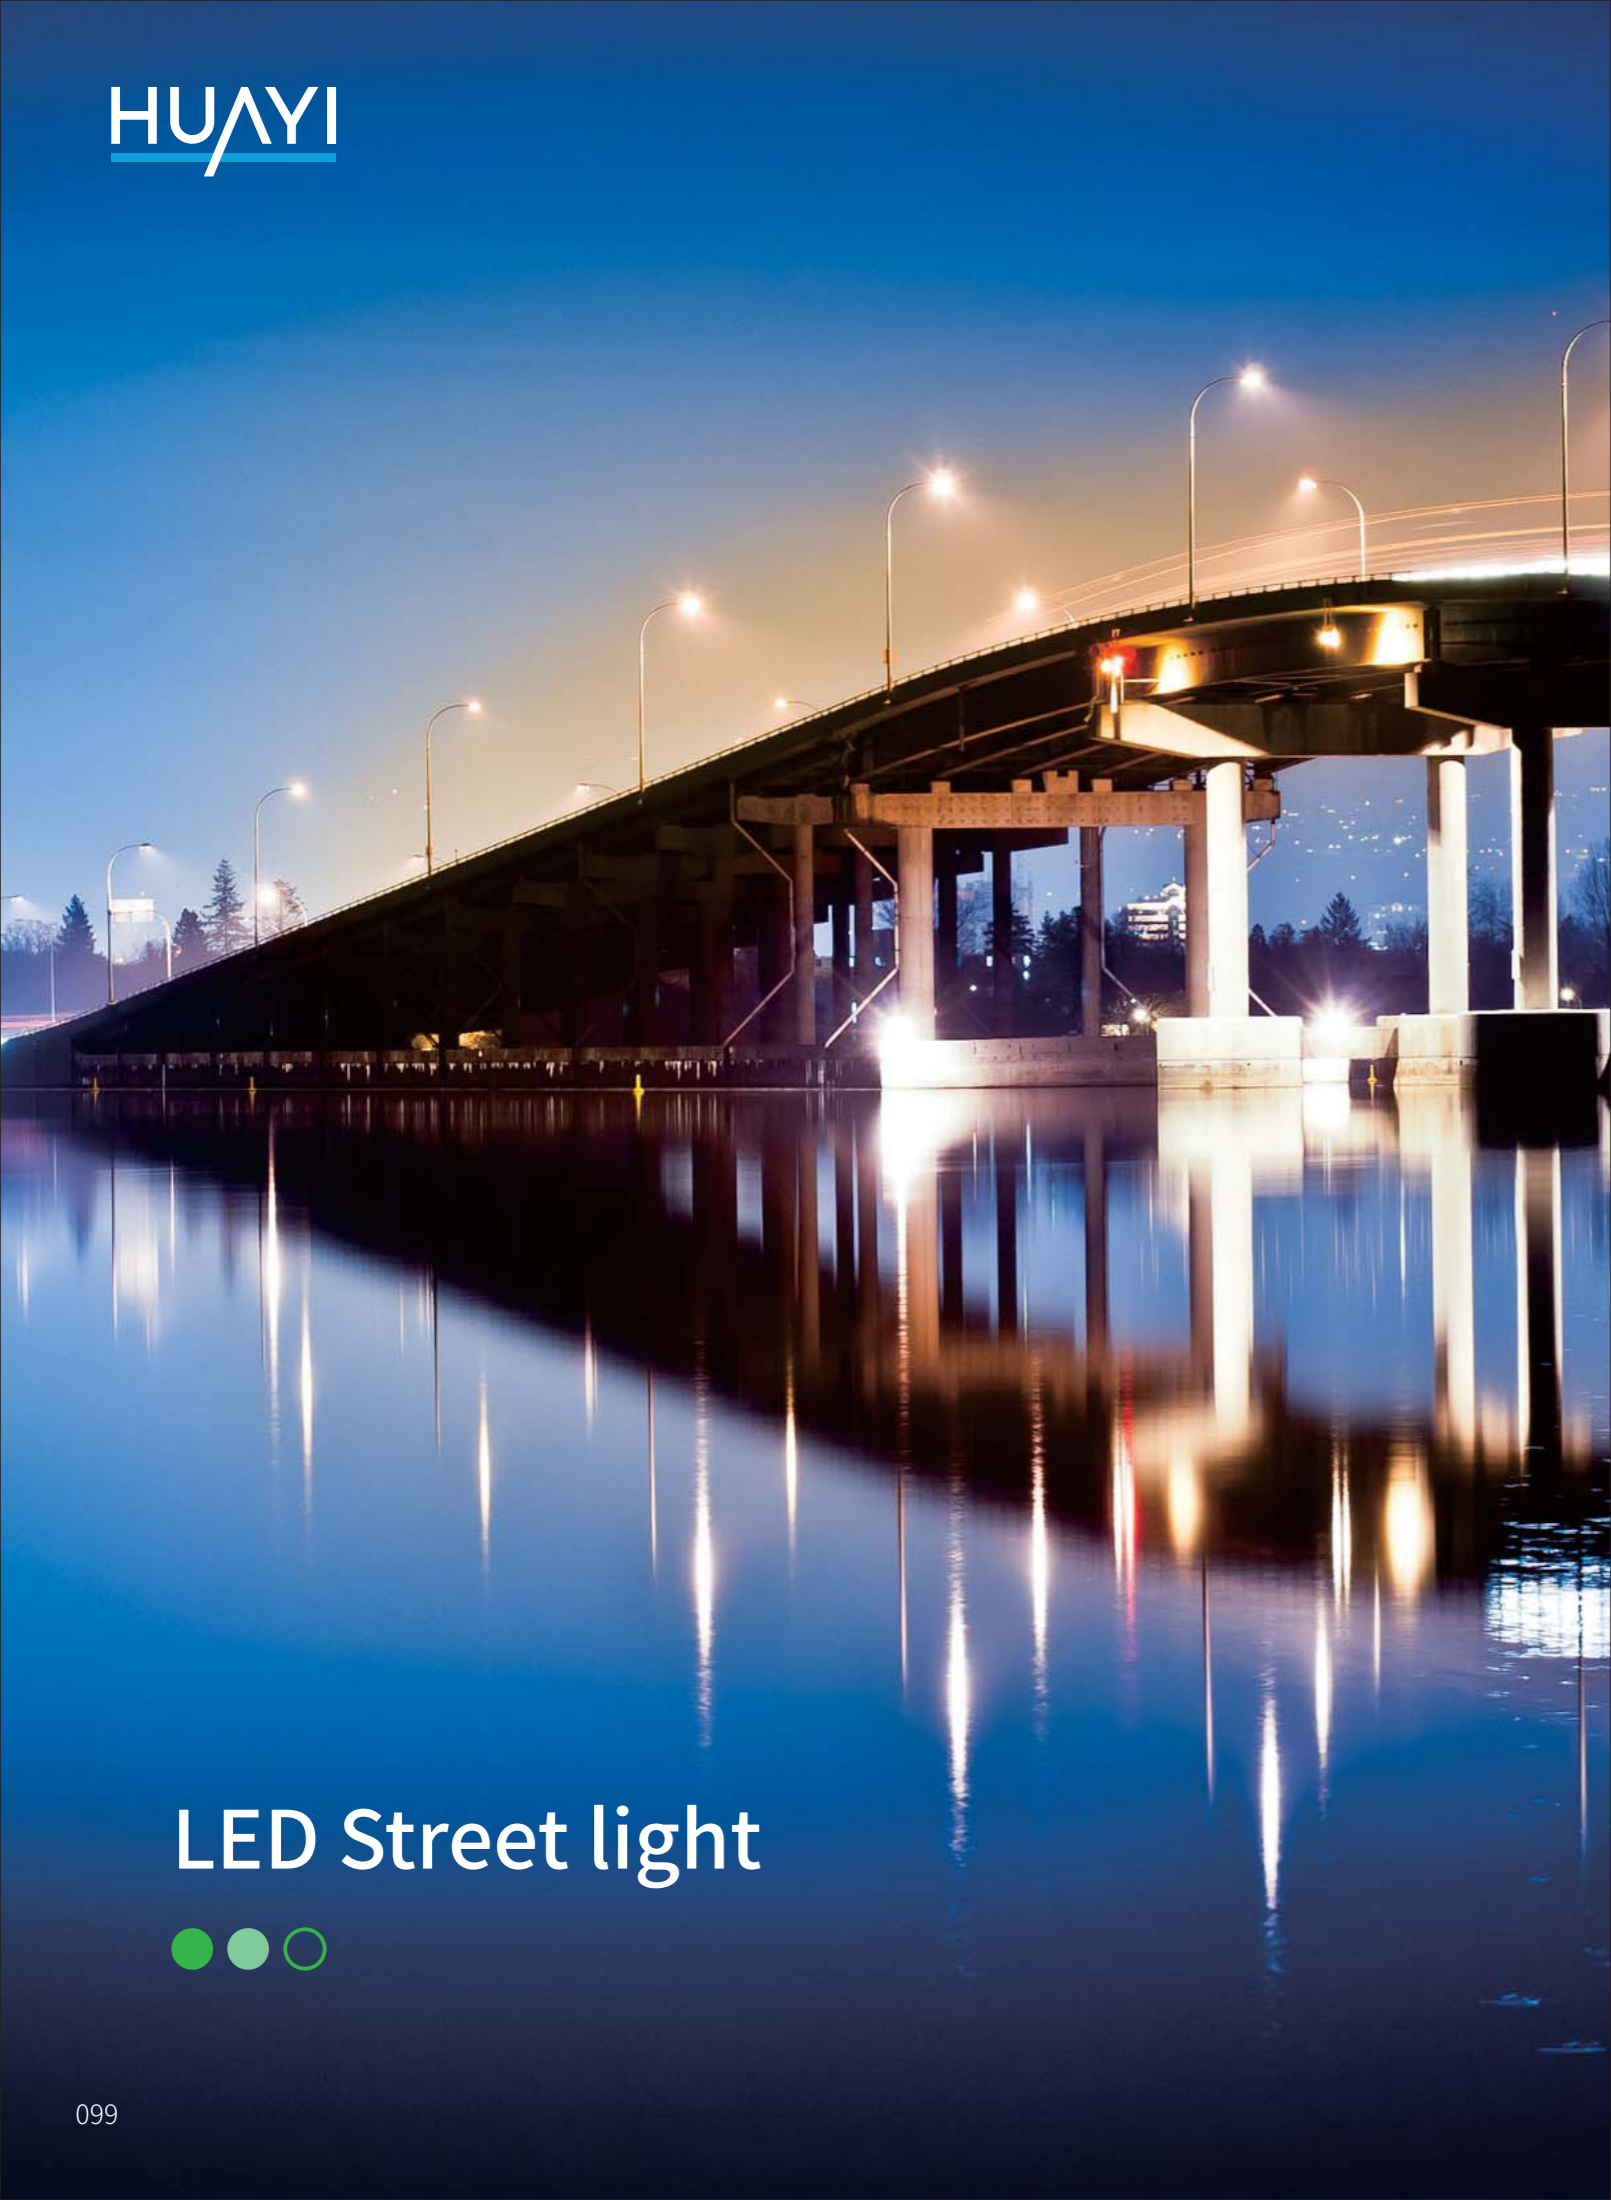

LED Street light



With photocell




Item Code	Wattage	Material	PF	LED	Luminous flux	Color temp.	Product size
HY-01-ST06-50W	50W	Aluminum+toughened glass	>0.9	Philip 3030SMD	5000LM	6000-6500K	423*179*56mm
HY-01-ST06-100W	100W	Aluminum+toughened glass	>0.9	Philip 3030SMD	10000LM	6000-6500K	505*210*70mm
HY-01-ST06-150W	150W	Aluminum+toughened glass	>0.9	Philip 3030SMD	15000LM	6000-6500K	640*240*70mm
HY-01-ST06-200W	200W	Aluminum+toughened glass	>0.9	Philip 3030SMD	20000LM	6000-6500K	640*240*70mm
HY-01-ST06-250W	250W	Aluminum+toughened glass	>0.9	Philip 3030SMD	25000LM	6000-6500K	820*305*70mm

AC100-265V



Item Code	Wattage	Surge	PF	LED Chips	Luminous flux	Color temp.	Product size
HY-01-ST05-60W	60W	6KV	>0.95	144pcs	8400LM	6000K	50.5*23*11mm
HY-01-ST05-100W	100W	6KV	>0.95	216pcs	14000LM	6000K	57*23*11mm
HY-01-ST05-150W	150W	6KV	>0.95	288pcs	21000LM	6000K	62*26*11mm
HY-01-ST05-200W	200W	6KV	>0.95	480pcs	28000LM	6000K	67.5*32*12mm

AC90-305V

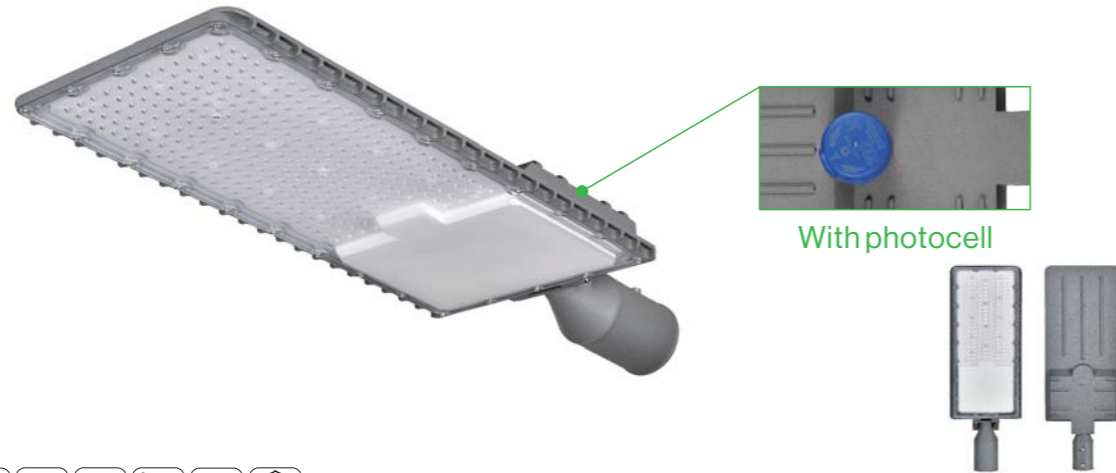

Item Code	Wattage	Material	PF	LED Chips	Luminous flux	Color temp.	Product size
HY-01-ST01-50W	50W	Die-casting aluminum+PC	>0.9	100pcs	6500LM	6000-6500K	500*160*38mm
HY-01-ST01-100W	100W	Die-casting aluminum+PC	>0.9	200pcs	13000LM	6000-6500K	636.6*211*38mm
HY-01-ST01-150W	150W	Die-casting aluminum+PC	>0.9	300pcs	19500LM	6000-6500K	675*255*83mm
HY-01-ST01-200W	200W	Die-casting aluminum+PC	>0.9	400pcs	26000LM	6000-6500K	783*260*83mm

AC100-265V



Item Code	Wattage	Material	PF	LED Chips	Luminous flux	Color temp.	Product size
HY-01-ST03-50W	50W	Aluminum+PC	>0.9	72pcs	5000LM	6000-6500K	138*23*408mm
HY-01-ST03-100W	100W	Aluminum+PC	>0.9	144pcs	12000LM	6000-6500K	151*23*460mm
HY-01-ST03-150W	150W	Aluminum+PC	>0.9	216pcs	18000LM	6000-6500K	183*23*537mm
HY-01-ST03-200W	200W	Aluminum+PC	>0.9	288pcs	24000LM	6000-6500K	211*24*650mm

AC100-265V



Item Code	Wattage	Material	PF	LED Chips	Luminous flux	Color temp.	Product size
HY-01-ST02-50W	50W	Die-casting aluminum	>0.9	80pcs	5500LM	6000-6500K	480*200*90mm
HY-01-ST02-100W	100W	Die-casting aluminum	>0.9	130pcs	11000LM	6000-6500K	550*220*90mm
HY-01-ST02-150W	150W	Die-casting aluminum	>0.9	215pcs	16500LM	6000-6500K	675*295*90mm

AC100-265V



Item Code	Wattage	Material	PF	LED Chips	Luminous flux	Color temp.	Product size
HY-01-ST04-50W	50W	Aluminum+PC	>0.9	SMD 2835*72PCS	5000LM	6000K-6500K	445*113*75mm
HY-01-ST04-100W	100W	Aluminum+PC	>0.9	SMD 2835*144PCS	10000LM	6000K-6500K	500*128*75mm
HY-01-ST04-150W	150W	Aluminum+PC	>0.9	SMD 2835*216PCS	15000LM	6000K-6500K	565*164*75mm
HY-01-ST04-200W	200W	Aluminum+PC	>0.9	SMD 2835*288PCS	20000LM	6000K-6500K	685*196*75mm

AC100-265V

LED High bay





Item Code	Wattage	Material	PF	Lumen Efficiency	Color temp.	Product size
HY-01-HB01-100W	100W	Alu+PC	>0.9	110lm/w	2700K-6500K	φ221.5*136.5mm
HY-01-HB01-150W	150W	Alu+PC	>0.9	110lm/w	2700K-6500K	φ264*139mm
HY-01-HB01-200W	200W	Alu+PC	>0.9	110lm/w	2700K-6500K	φ301*150mm

AC100-265V



Item Code	Wattage	Material	PF	Lumen Efficiency	Color temp.	Product size
HY-01-HB02-100W-*	100W	Alu+Glass Cover	>0.9	100lm/w	2700K-6500K	φ240*60mm
HY-01-HB02-150W-*	150W	Alu+Glass Cover	>0.9	100lm/w	2700K-6500K	φ280*40mm
HY-01-HB02-150W-*	150W	Alu+Glass Cover	>0.9	100lm/w	2700K-6500K	φ340*60mm
HY-01-HB02-200W-*	200W	Alu+Glass Cover	>0.9	100lm/w	2700K-6500K	φ340*60mm
HY-01-HB02-250W-*	250W	Alu+Glass Cover	>0.9	100lm/w	2700K-6500K	φ440*60mm

AC200-240V

AC185-265V

AC110-265V



Item Code	Wattage	Material	PF	Lumen Efficiency	Color temp.	Product size
HY-01-HB03-100W	100W	Alu+PC	>0.9	100lm/w	2700K-6500K	φ257*70mm
HY-01-HB03-150W	150W	Alu+PC	>0.9	100lm/w	2700K-6500K	φ295*70mm
HY-01-HB03-200W	200W	Alu+PC	>0.9	100lm/w	2700K-6500K	φ358*70mm

AC100-265V



Item Code	Wattage	Material	PF	Lumen Efficiency	Color temp.	Product size
HY-01-HB04-100W	100W	Alu+PC	>0.9	120lm/w	2700K-6500K	φ291*156mm
HY-01-HB04-150W	150W	Alu+PC	>0.9	120lm/w	2700K-6500K	φ335*165mm
HY-01-HB04-200W	200W	Alu+PC	>0.9	120lm/w	2700K-6500K	φ380*173mm
HY-01-HB04-250W	250W	Alu+PC	>0.9	120lm/w	2700K-6500K	φ380*173mm

AC100-265V



HY-01-WL03-10W

HY-01-WL04-2*10W

HY-01-WL05-10W

LED Work Light




Unique 180°rotating two in one design of stand



Power Bank Function---Built in high quality Lithium Battery with standard USB port charges mobile or other devices conveniently



Portable and lightweight work light, easy to carry or put onto the ground with the stand or hanging

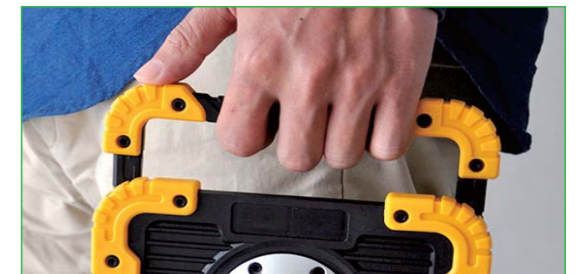

Multi Modes---Press red switch button to switch 3lighting modes:Dim, Brighter and Flashing for emergency situation, the best gear for a ROADSIDE EMERGENCY or sendan sos when need HELP in the wild



Item Code	Wattage	Luminous flux	Battery capacity	Working time	Charging time	Color temp.	Product size
HY-01-WL03-10W	10W	1000LM	4400mAh	5-6hrs	4hrs	2700-7000K	172*127*46mm
HY-01-WL04-2*10W	10W	1200LM	2*2200mAh	4-5hrs	4hrs	2700-7000K	172*127*46mm
HY-01-WL05-10W-DRY	10W	500LM	4*AA Battery	6hrs	/	2700-7000K	172*127*46mm
HY-01-WL05-10W	10W	750LM	2*2200mAh	5-6hrs	4hrs	2700-7000K	172*127*46mm

AC100-240V



LED Garden Light



Item Code	Wattage	Material	PF	LED	Luminous flux	Color temp.	Product size
HY-01-GL01-50W	50W	Aluminum+toughened glass	>0.9	SMD3030	5000LM	6000-6500K	φ466.5*565mm
HY-01-GL01-100W	100W	Aluminum+toughened glass	>0.9	SMD3030	10000LM	6000-6500K	φ466.5*565mm
HY-01-GL01-150W	150W	Aluminum+toughened glass	>0.9	SMD3030	15000LM	6000-6500K	φ466.5*565mm

AC100-305V




Item Code	Wattage	Material	PF	LED Chips	Luminous flux	Color temp.	Product size
HY-01-GL02-50W	50W	Aluminum+PC	>0.9	120pcs	6000LM	6000-6500K	φ458*150mm
HY-01-GL02-100W	100W	Aluminum+PC	>0.9	120pcs	12000LM	6000-6500K	φ458*150mm

AC100-305V

SOLAR LIGHT



Solar Floodlight

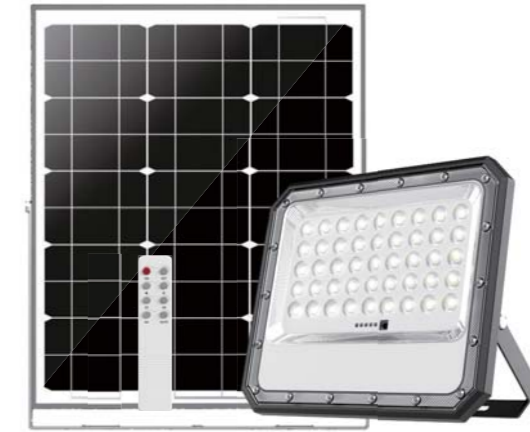


Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Power Code	Light Size (mm)	Solar Panel Size (mm)
HY-04-SFL01-50W	700lm	6W/5V	5AH3.2V	3030/21PCS	0.3mm ² /2Meters	205*170*45	210*200*17
HY-04-SFL01-100W	1400lm	10W/5V	10AH3.2V	3030/45PCS	0.5mm ² /2Meters	256*211*45	205*300*17
HY-04-SFL01-150W	2000lm	15W/5V	15AH3.2V	3030/66PCS	0.5mm ² /2Meters	306*257*47	390*230*17
HY-04-SFL01-200W	2700lm	20W/5V	20AH3.2V	3030/91PCS	0.5mm ² /2Meters	361*301*47	390*300*17



 Battery Replaceable
 Imbricated Solar Panel



Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Power Code	Light Size (mm)	Solar Panel Size (mm)
HY-04-SFL02-50W	650lm	5W/5V	5AH3.2V	3030/24PCS	0.3mm ² /2Meters	182*152*45	210*200*17
HY-04-SFL02-100W	1200lm	10W/5V	10AH3.2V	3030/40PCS	0.5mm ² /2Meters	255*188*45	205*300*17
HY-04-SFL02-150W	1800lm	15W/5V	15AH3.2V	3030/40PCS	0.5mm ² /2Meters	255*188*45	390*230*17
HY-04-SFL02-200W	2200lm	20W/5V	20AH3.2V	3030/60PCS	0.5mm ² /2Meters	275*225*45	390*300*17
HY-04-SFL02-250W	2800lm	25W/5V	25AH3.2V	3030/60PCS	0.75mm ² /2Meters	275*225*45	390*360*17
HY-04-SFL02-300W	3300lm	30W/5V	30AH3.2V	3030/96PCS	0.75mm ² /2Meters	332*275*45	390*430*17

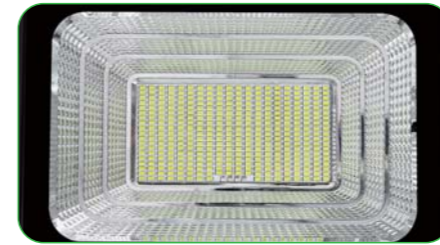

PC silver reflector with SMD5730 LEDs to reach a high lumen output. Power indicator provides a valid reminder to end-user.



Monocrystalline silicon solar panel, long life cycle, high fire resistance, better heat dissipation and higher power generation efficiency.



High-performance lithium battery, over-charge protection, over-discharge protection, and night anti-reverse charge protection.




The aluminum shell has a smooth surface that is not easy to accumulate dust. Tempered glass improves overall luminous flux.

Remote Control

- ON** Turn ON **Brightness-** **3H** 3hrs timing **5H** 5hrs timing
- OFF** Turn OFF **Brightness+** **ATUO** Auto mode **8H** 8hrs timing



SFL03-25W	SFL03-40W	SFL03-60W	SFL03-120W	SFL03-200W
Light Size L: 195mm W: 46mm H: 150mm	Light Size L: 232mm W: 50mm H: 188mm	Light Size L: 260mm W: 63mm H: 210mm	Light Size L: 314mm W: 73mm H: 255mm	Light Size L: 353mm W: 77mm H: 272mm
Solar Panel Size L: 235mm W: 17mm H: 350mm	Solar Panel Size L: 235mm W: 17mm H: 350mm	Solar Panel Size L: 300mm W: 17mm H: 350mm	Solar Panel Size L: 350mm W: 17mm H: 450mm	Solar Panel Size L: 350mm W: 17mm H: 600mm

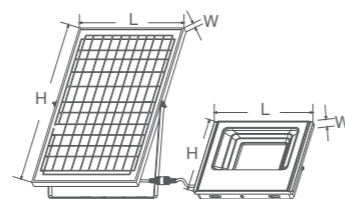

Item Code	Lumen	Battery	Solar Panel	SMD5730	Charing	Discharging	Light Size	Solar Panel Size
HY-04-SFL03-25W	250lm	3.2V,5AH	6V,9W	72 PCS	6-8 hrs	10-12 hrs	195*150*46mm	350*235*17mm
HY-04-SFL03-40W	350lm	3.2V,6AH	6V,12W	110 PCS	6-8 hrs	10-12 hrs	232*188*50mm	350*235*17mm
HY-04-SFL03-60W	550lm	3.2V,10AH	6V,15W	156 PCS	6-8 hrs	10-12 hrs	260*210*63mm	350*300*17mm
HY-04-SFL03-120W	1200lm	3.2V,20AH	6V,25W	256 PCS	6-8 hrs	10-12 hrs	314*255*73mm	450*350*17mm
HY-04-SFL03-200W	1600lm	3.2V,25AH	6V,35W	376 PCS	6-8 hrs	10-12 hrs	353*272*77mm	600*350*17mm



Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Power Code	Light Size (mm)	Solar Panel Size (mm)
HY-04-SFL04-40W	500lm	5W/5V	4AH3.2V	2835/32PCS	0.3mm ² /2Meters	185*138*41	210*200*17
HY-04-SFL04-100W	1200lm	10W/5V	10AH3.2V	2835/66PCS	0.3mm ² /2Meters	230*175*48	205*300*17
HY-04-SFL04-150W	2000lm	15W/5V	15AH3.2V	2835/66PCS	0.5mm ² /2Meters	230*175*48	390*230*17
HY-04-SFL04-200W	2700lm	20W/5V	20AH3.2V	2835/126PCS	0.5mm ² /2Meters	280*218*48	390*300*17
HY-04-SFL04-250W	3000lm	25W/5V	25AH3.2V	2835/126PCS	0.75mm ² /2Meters	280*218*48	390*360*17
HY-04-SFL04-300W	3600lm	30W/5V	30AH3.2V	2835/198PCS	0.75mm ² /2Meters	336*256*48	390*430*17
HY-04-SFL04-400W	4000lm	40W/5V	40AH3.2V	2835/198PCS	1.0mm ² /2Meters	336*256*48	390*500*17



Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Power Code	Light Size (mm)	Solar Panel Size (mm)
HY-04-SFL05-50W	700lm	5W/5V	5.5AH3.2V	3030/28PCS	0.3mm ² /2Meters	168*126*35	210*200*17
HY-04-SFL05-100W	1400lm	10W/5V	8AH3.2V	3030/60PCS	0.5mm ² /2Meters	230*172*39	205*300*17
HY-04-SFL05-150W	2100lm	15W/5V	16AH3.2V	3030/60PCS	0.5mm ² /2Meters	230*172*39	390*230*17
HY-04-SFL05-200W	2700lm	20W/5V	20AH3.2V	3030/60PCS	0.5mm ² /2Meters	230*172*39	390*300*17
HY-04-SFL05-250W	3200lm	25W/5V	24AH3.2V	3030/126PCS	0.75mm ² /2Meters	298*225*41	390*360*17
HY-04-SFL05-300W	4100lm	30W/5V	28AH3.2V	3030/126PCS	0.75mm ² /2Meters	298*225*41	390*430*17
HY-04-SFL05-400W	4600lm	40W/5V	40AH3.2V	3030/126PCS	1.0mm ² /2Meters	298*225*41	390*560*17



Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Power Code	Light Size (mm)	Solar Panel Size (mm)
HY-04-SFL06-50W	600lm	6W/5V	5AH3.2V	5050/18PCS	0.3mm ² /2Meters	205*170*45	210*200*17
HY-04-SFL06-100W	1200lm	10W/5V	10AH3.2V	5050/32PCS	0.5mm ² /2Meters	256*211*45	205*300*17
HY-04-SFL06-150W	1800lm	15W/5V	15AH3.2V	5050/45PCS	0.5mm ² /2Meters	306*257*47	390*230*17
HY-04-SFL06-200W	2200lm	20W/5V	20AH3.2V	5050/66PCS	0.5mm ² /2Meters	361*301*47	390*300*17



Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Power Code	Light Size (mm)	Solar Panel Size (mm)
HY-04-SFL08-50W	600lm	6W/5V	5AH3.2V	5050/70PCS	0.3mm ² /2Meters	205*170*45	210*200*17
HY-04-SFL08-100W	1200lm	10W/5V	10AH3.2V	5050/160PCS	0.5mm ² /2Meters	256*211*45	205*300*17
HY-04-SFL08-150W	1800lm	15W/5V	15AH3.2V	5050/297PCS	0.5mm ² /2Meters	306*257*47	390*230*17
HY-04-SFL08-200W	2200lm	20W/5V	20AH3.2V	5050/445PCS	0.5mm ² /2Meters	361*301*47	390*300*17



Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Power Code	Light Size (mm)	Solar Panel Size (mm)
HY-04-SFL07-50W	600lm	6W/5V	5AH3.2V	2835/90PCS	0.3mm ² /2Meters	205*170*45	210*200*17
HY-04-SFL07-100W	1200lm	10W/5V	10AH3.2V	2835/174PCS	0.5mm ² /2Meters	256*211*45	205*300*17
HY-04-SFL07-150W	1800lm	15W/5V	15AH3.2V	2835/282PCS	0.5mm ² /2Meters	306*257*47	390*230*17
HY-04-SFL07-200W	2200lm	20W/5V	20AH3.2V	2835/554PCS	0.5mm ² /2Meters	361*301*47	390*300*17

SOLAR LED FLOOD LIGHT
SOLAR LED STREET LIGHT
2IN1




Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Power Code	Light Size (mm)	Solar Panel Size (mm)
HY-04-SFL09-100W	1100lm	10W/5V	8AH3.2V	3030/40PCS	/	226*165*53	210*340*17
HY-04-SFL09-200W	2600lm	20W/5V	20AH3.2V	3030/70PCS	/	293*205*53	390*300*17
HY-04-SFL09-300W	3000lm	30W/5V	28AH3.2V	3030/108PCS	/	348*243*53	390*430*17



Solar Wall Light



Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Material	Light Size (mm)	Solar Panel Size (mm)
HY-04-SWL01-15	1500lm	2W/5.5V	2600mAh	2835/28PCS	Die-casting Aluminum	121*87*33	137*82
HY-04-SWL01-25	2500lm	4W/9V	2*2600mAh	2835/60PCS	Die-casting Aluminum	190*119*34	200*120



Item Code	Lumen	Solar Panel	Battery	Induction Mode	Light Size (mm)	IP Rating
HY-04-SWL04-20	500lm	1.8W/5V	1800mAh/3.2V	Lighting Control+PIR	160*130*28	IPX4
HY-04-SWL04-40	1000lm	4.5W/5V	3800mAh/3.2V	Lighting Control+PIR	350*140*28	IPX4
HY-04-SWL04-60	1350lm	9W/5V	5700mAh/3.2V	Lighting Control+PIR	350*266*28	IPX4
HY-04-SWL05-12	100lm	1.8W/5V	1200mAh/3.2V	Lighting Control	160*130*28	IPX4
HY-04-SWL05-40	400lm	4.5W/5V	3800mAh/3.2V	Lighting Control	350*140*28	IPX4
HY-04-SWL05-62	600lm	9W/5V	5700mAh/3.2V	Lighting Control	350*266*28	IPX4
HY-04-SWL05-12-RGB	/	1.8W/5V	1200mAh/3.2V	Lighting Control RGB	160*130*28	IPX4
HY-04-SWL05-40-RGB	/	4.5W/5V	3800mAh/3.2V	Lighting Control RGB	350*140*28	IPX4
HY-04-SWL05-60-RGB	/	9W/5V	5700mAh/3.2V	Lighting Control RGB	350*266*28	IPX4



High quality SMD2835 LEDs with optical lens, ensure a high lumen output and low light decay.

PIR motion sensor, sensing angle 120°, sensing distance 3-6 meters, it is more sensitive. Light turned off 30 seconds after the sensing object leaves.


Backside of the solar wall lamp has a luminous design, gives a unique halo on the wall.

Foldable design, 20% savings in shipping volume to reduce transportation costs.



SWL02-20 SWL02-40 SWL02-60

Light Size L: 130mm W: 103mm H: 190mm	Light Size L: 180mm W: 103mm H: 185mm	Light Size L: 230mm W: 103mm H: 185mm
Solar Panel Size L: 119mm H: 93mm	Solar Panel Size L: 167mm H: 93mm	Solar Panel Size L: 219mm H: 93mm



SWL03-20 SWL03-40 SWL03-60

Light Size L: 95mm W: 90mm H: 190mm	Light Size L: 115mm W: 110mm H: 220mm	Light Size L: 135mm W: 125mm H: 260mm
Solar Panel Size L: 54mm H: 114mm	Solar Panel Size L: 64mm H: 134mm	Solar Panel Size L: 74mm H: 157mm



Item Code	Lumen	Battery	Solar Panel	SMD2835	Charing	Discharging	Light Size	Solar Panel Size
HY-04-SWL02-20	200lm	3.2V,1.5AH	5.5V,1.2W	36 PCS	4-6 hrs	6-8 hrs	130*103*190mm	119*93mm
HY-04-SWL02-40	350lm	3.2V,1.8AH	5.5V,1.8W	54 PCS	4-6 hrs	6-8 hrs	180*103*185mm	167*93mm
HY-04-SWL02-60	420lm	3.2V,3.0AH	5.5V,2.5W	72 PCS	4-6 hrs	6-8 hrs	230*103*185mm	219*93mm


Item Code	Lumen	Battery	Solar Panel	SMD2835	Charing	Discharging	Light Size	Solar Panel Size
HY-04-SWL03-20	260lm	3.2V,1.5AH	5.5V,0.8W	16 PCS	4-6 hrs	6-8 hrs	95*90*190mm	114*54mm
HY-04-SWL03-40	330lm	3.2V,1.8AH	5.5V,1W	20 PCS	4-6 hrs	6-8 hrs	115*110*220mm	134*64mm
HY-04-SWL03-60	430lm	3.2V,3.0AH	5.5V,1.5W	30 PCS	4-6 hrs	6-8 hrs	135*125*260mm	157*74mm



Solar Street Light



Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Power Code	Light Size (mm)	Solar Panel Size (mm)
HY-04-SSL01-300W	4300lm	30W/5V	30AH3.2V	3030/91PCS	/	534*215*79	390*430
HY-04-SSL01-400W	5200lm	40W/5V	40AH3.2V	3030/91PCS	/	534*215*79	390*560
HY-04-SSL01-500W	6300lm	50W/5V	50AH3.2V	3030/91PCS	/	534*215*79	390*700

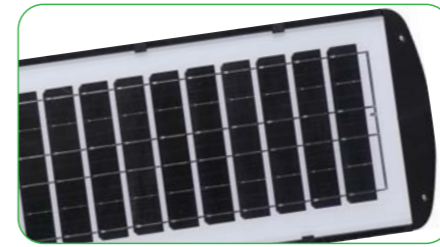

High quality ABS housing in black color, with high brightness SMD5730 LEDs. Silver or white reflector gives different lumen for option.

Monocrystalline solar panel, high energy conversion rate reaches 21%, long lifespan more than 5 years.

High quality LiFePO4 lithium battery in AAA class ensure a long lifespan, serve more than 5 years. Battery replaceable design makes light more durability.

The PIR sensing function can save energy and make the lights work longer at night. Factory set 20%-100%-20% mode or 0-100%-0.

Remote Control

OFF Turn OFF 2H 2hrs timing 4H 4hrs timing 6H 6hrs timing

Induction Induction Mode:20%-100%-20%

Always Light for whole night

SSL02-30

Light Size

L: 210mm
W: 55mm
H: 380mm

Solar Panel Size

L: 193mm
H: 282mm

SSL02-60

Light Size

L: 210mm
W: 55mm
H: 505mm

Solar Panel Size

L: 193mm
H: 382mm

SSL02-90

Light Size

L: 225mm
W: 55mm
H: 630mm

Solar Panel Size

L: 209mm
H: 497mm


SSL02-120

Light Size

L: 225mm
W: 55mm
H: 745mm

Solar Panel Size

L: 207mm
H: 609mm

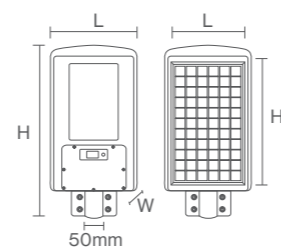

Item Code	Lumen	Battery	Solar Panel	SMD5730	Charing	Discharging	Product size	Solar Panel Size
HY-04-SSL02-30	450lm	3.2V,5AH	6V,6.5W	84 PCS	6-8hrs	10-12hrs	210*380*55mm	193*282mm
HY-04-SSL02-60	900lm	3.2V,10AH	6V,10.5W	168 PCS	6-8hrs	10-12hrs	210*505*55mm	193*382mm
HY-04-SSL02-90	1490lm	3.2V,15AH	6V,12.5W	252 PCS	6-8hrs	10-12hrs	225*630*55mm	209*497mm
HY-04-SSL02-120	1750lm	3.2V,20AH	6V,16.6W	336 PCS	6-8hrs	10-12hrs	225*745*55mm	207*609mm




Solar Garden Light



Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Number of lamp caps	Light Size (mm)	Solar Panel Size (mm)
HY-04-SGL01-LY04	90lm	5W/5V	4000mAh/3.7V	3030/4PCS	4 heads	511*173*30	Φ204*167*4
HY-04-SGL01-LY06	90lm	5W/5V	4000mAh/3.7V	3030/6PCS	6 heads	511*173*30	Φ204*167*4



Item Code	Lumen	Solar Panel	Battery	Chips&QTY	Material	Light Size (mm)	Solar Panel Size (mm)
HY-04-SGL03-G50	500lm	1.5W/5.5V	1200mAh	2835/48PCS	ABS+PC	136*86*47	146*90*31
HY-04-SGL03-G85	850lm	1.5W/5.5V	2*1200mAh	2835/48PCS	ABS+PC	136*86*47	146*90*31

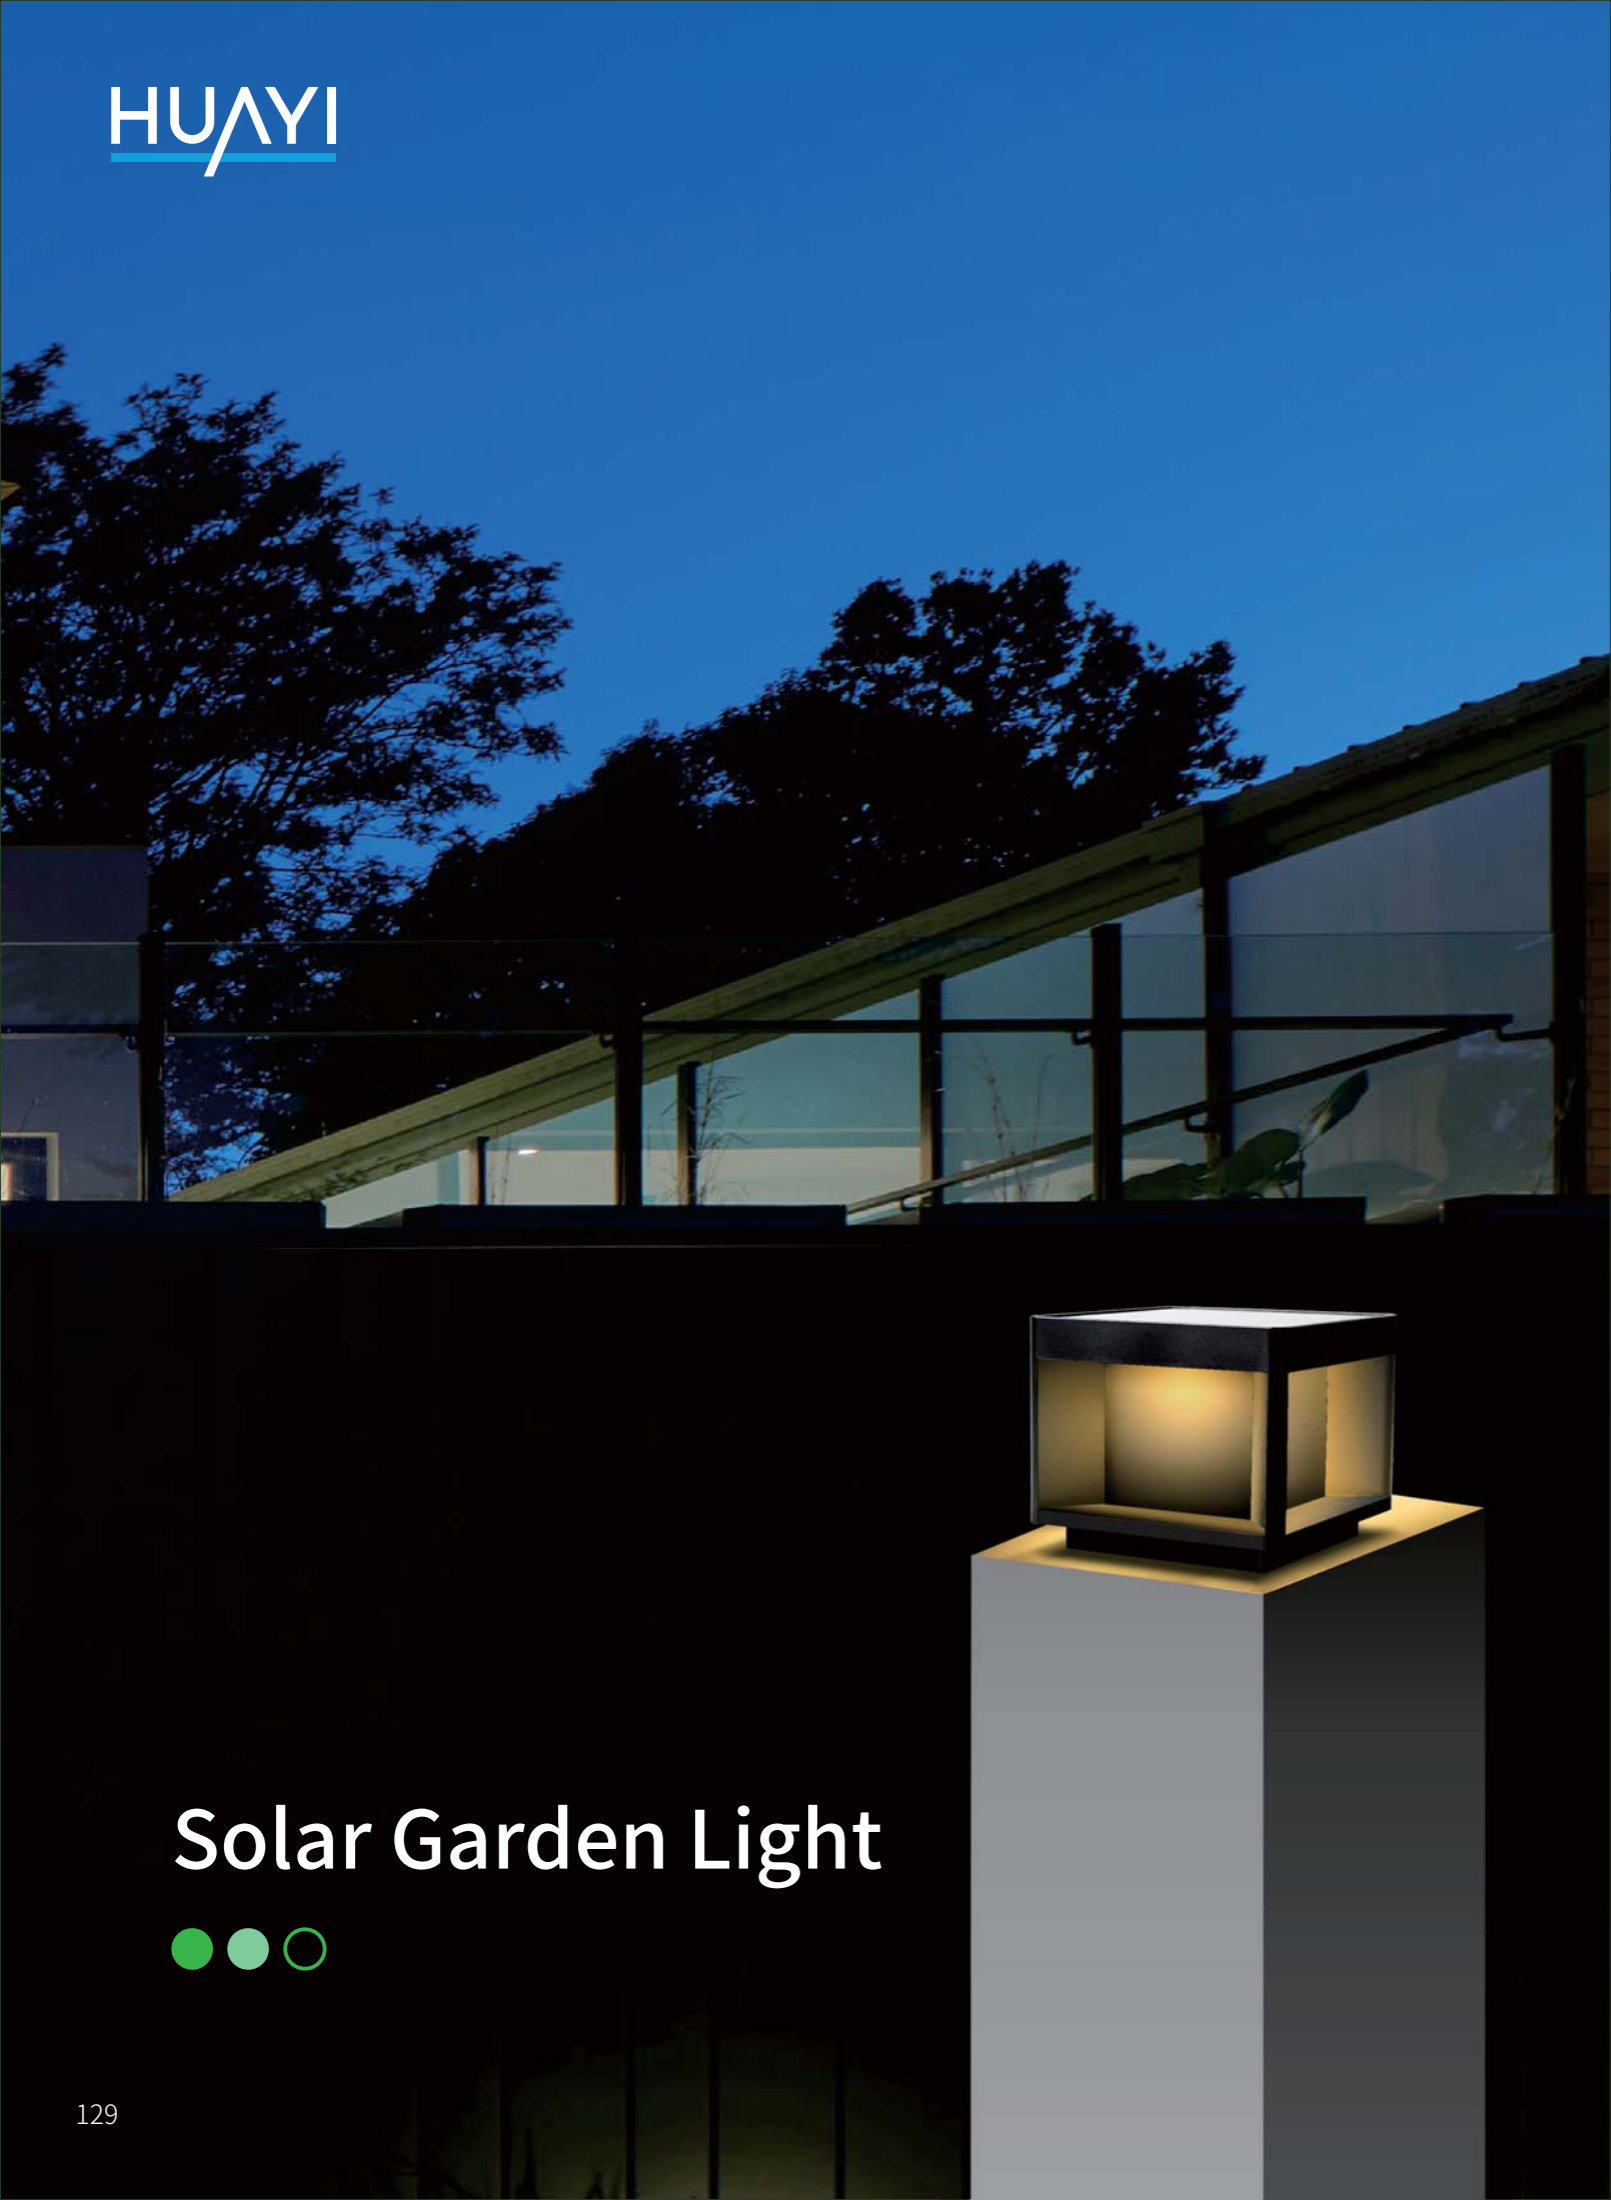

Solar Garden Light



Highlight



No wiring,
easy installation



Item Code	Material	Solar Panel	Battery	Chips&QTY	Power Code	Light Size (mm)	Solar Panel Size (mm)
HY-04-SGL02-S150	ABS	1.6W/5V	1.2AH/3.2V	3030/32PCS (2CCT 3000K/6500K)	/	150*150*125	140*140*4


Solar Strip Light




Remote Control

- Forced OFF no photocell
- ON Turn ON
- + Mode+ (20modes)
- Speed-
- 3H 3hrs timing
- 5H 5hrs timing
- M Left/Right direction
- OFF Turn OFF
- Mode- (20modes)
- Speed+
- AUTO Automode
- 8H 8hrs timing


- | | | |
|--|--|--|
| MG-50
Strip Length Size
L: 5m
Solar Panel Size
L: 329mm
H: 169mm | MG-100
Strip Length Size
L: 10m
Solar Panel Size
L: 329mm
H: 229mm | MG-200
Strip Length Size
L: 20m
Solar Panel Size
L: 409mm
H: 329mm |
|--|--|--|

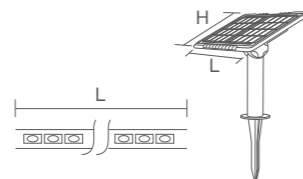

Different length and color for option. Provide 5m, 10m and 20m strip. Can choose single color 3000K or RGB color for different decoration demands.

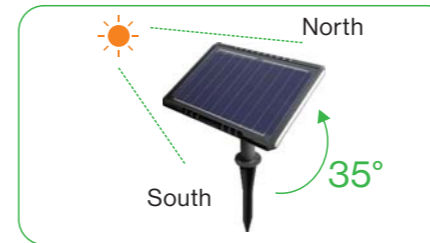

High-efficiency fast charging, solar controller simulates the MPPT charging scheme charging efficiency improved by 50%.

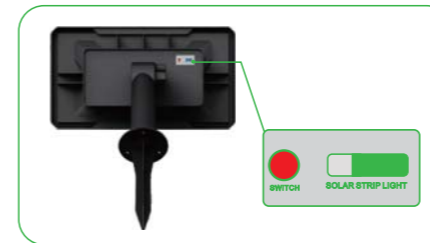

Switch with memory function, especially for single color, can adjust lighting mode, breathing or flashing.



Multi-installation way, equipped with connecting rod & spike, can be both wall mounted and ground plug mounted.



Various lighting modes, single color support constant lighting, flash and breathing. RGB version support color changing, fading, chasing, flowing, breathing, flashing, jumping etc. And can adjust speed and direction.

Item Code	Lumen	Battery	Solar Panel	SMD2835	Charing	Discharging	Strip Length	Solar Panel Size
HY-04-SSP-MG-50	360lm	3.2V,6AH	4V,9W	48PCS/m	4-6 hrs	10-12 hrs	5 meters	329*169 mm
HY-04-SSP-MG-100	720lm	3.2V,12AH	4V,13W	48PCS/m	4-6 hrs	10-12 hrs	10 meters	329*229 mm
HY-04-SSP-MG-200	1440lm	3.2V,24AH	4V,25W	48PCS/m	4-6 hrs	10-12 hrs	20 meters	409*329 mm
HY-04-SSP-MG-50RGB	/	3.2V,6AH	4V,9W	24PCS/m	4-6 hrs	10-12 hrs	5 meters	329*169mm
HY-04-SSP-MG-100RGB	/	3.2V,12AH	4V,13W	24PCS/m	4-6 hrs	10-12 hrs	10 meters	329*229 mm
HY-04-SSP-MG-200RGB	/	3.2V,24AH	4V,25W	24PCS/m	4-6 hrs	10-12 hrs	20 meters	409*329 mm



HY-05-PPS-300W

Power Station
300W 252Wh



SPECIFICATION

Capacity: 252Wh(14.4V, 17.5Ah)	INPUT
Li-ion NCM, 70,000mAh@3.6V	DC Input: 15V/4A, 60W max Car Charge: 12V/5A, 60W max Solar Charge: 12-24V, 60W max
Pure Sine Wave Output 300W Continuous, 600W Surge Max AC Output: 110V/220V 50Hz/60Hz	OUTPUT
Operating Temp: -10°C~40°C Charging Temp: 0°C~40°C Weight: 3.2KG Size: 220*170*210mm	2-DC Port: 12V/8A, 100W max 1-Car Port: 12V/8.3A, 100W max Wireless Charge Port: NO 2-USB-A: 5V/2.4A*1, 18W*1 (QC 3.0) 1-USB-C(PD): 30W

TV(100W) ≈2.26 hours	Laptop(50Wh) ≈4 recharges	Mini Fridge(60W) ≈3.7hours
LED light(5W) ≈45.3 hours	Phone(12Wh) ≈18 recharges	Tablet(30Wh) ≈7 recharges

HY-05-PPS-600W-1

Power Station
600W 568Wh

TV(100W) ≈5.1 hours
LED light(5W) ≈102 hours
Laptop(50Wh) ≈10 recharges
Phone(12Wh) ≈42 recharges



SPECIFICATION

Capacity: 568Wh(21.6V, 25Ah)	INPUT
Li-ion NCM, 150,000mAh@3.6V	DC Input: 20V/5A, 100W max Car Charge: 12V/5A, 60W max Solar Charge: 12-24V, 60W max
Pure Sine Wave Output 600W Continuous, 1200W Surge Max AC Output: 110V/220V 50Hz/60Hz	OUTPUT
Operating Temp: -10°C~40°C Charging Temp: 0°C~40°C Weight: 5.4KG Size: 275*170*215mm	2-DC Port: 12V/8A, 100W max 1-Car Port: 12V/8.3A, 100W max Wireless Charge Port: NO 2-USB-A: 5V/2.4A*1, 18W*1 (QC 3.0) 1-USB-C(PD): 65W



HY-05-PPS-600W-2

Power Station
600W 568Wh



SPECIFICATION

Capacity: 568Wh(21.6V, 25Ah)	INPUT
Li-ion NCM, 150,000mAh@3.6V	DC Input: 20V/5A, 100W max Car Charge: 12V/5A, 60W max Solar Charge: 12-24V, 60W max
Pure Sine Wave Output 600W Continuous, 1200W Surge Max AC Output: 110V/220V 50Hz/60Hz	OUTPUT
Operating Temp: -10°C~40°C Charging Temp: 0°C~40°C Weight: 5.4KG Size: 275*170*215mm	2-DC Port: 12V/8A, 100W max 1-Car Port: 12V/8.3A, 100W max Wireless Charge Port: YES 2-USB-A: 5V/2.4A*1, 18W*1 (QC 3.0) 1-USB-C(PD): 65W

TV(100W) ≈5.1 hours	Laptop(50Wh) ≈10 recharges	Mini Fridge(60W) ≈8.5 hours
LED light(5W) ≈102 hours	Phone(12Wh) ≈42 recharges	Tablet(30Wh) ≈17 recharges



HY-05-PPS-1200W

Power Station
1200W 960Wh



SPECIFICATION

Capacity: 960Wh(32V, 30Ah)	INPUT
LiFePO4, 300,000mAh@3.2V	DC Input: 25V/8A, 200W max Car Charge: 12V/8.3A, 100W max Solar Charge: 12-30V, 100W max
Pure Sine Wave Output 1200W Continuous, 1800W Surge Max AC Output: 110V/220V 50Hz/60Hz	OUTPUT
Operating Temp: -10°C~40°C Charging Temp: 0°C~40°C Weight: 13KG Size: 463*289*366mm	1-Car Port: 12V/8.3A, 100W max Wireless Charge Port: NO 2-USB-A: 5V/2.4A*1, QC 18W*1 2-USB-C: 5V2.4A*1, PD 65W*1

TV(100W) ≈4.8 hours	Laptop(50Wh) ≈9 recharges	Mini Fridge(60W) ≈8 hours
LED light(5W) ≈96.7 hours	Phone(12Wh) ≈40 recharges	Tablet(30Wh) ≈16 recharges







HY-05-PPS-UPS-1200W

Power Station
1200W 960Wh

SPECIFICATION

Capacity: 960Wh(32V, 30Ah)	INPUT
LiFePO4, 300,000mAh@3.2V	AC Input: 1000W Car Charge: 12V/10A, 120W max Solar Charge: 12-30V/12A, 300W max
Pure Sine Wave Output 1200W Continuous, 1800W Surge Max AC Output: 110V/220V 50Hz/60Hz	OUTPUT
Operating Temp: -10°C~40°C Charging Temp: 0°C~40°C Weight: 14KG Size: 366*235*266mm	1*Car Port: 12V/10A, 120W max Wireless Charge Port: YES 3*USB-A: 5V/2.4A*2, QC 18W*1 3*USB-C: 5V2.4A*2, PD 65W*1



HY-05-PPS-UPS-2000W

Power Station
2000W 2160Wh



SPECIFICATION

Capacity: 2160Wh(45V, 48Ah)	INPUT
LiFePO4, 675,000mAh@3.2V	AC Input: 1500W Car Charge: 12V/24V, 12A Solar Charge: 12-50V/12A, 400W max
Pure Sine Wave Output 2000W Continuous, 4000W Surge Max AC Output: 110V/220V 50Hz/60Hz	OUTPUT
Operating Temp: -10°C~40°C Charging Temp: 0°C~40°C Weight: 25KG Size: 463*289*366mm	1*Car Port: 12V/10A, 120W max Wireless Charge Port: YES 6*USB-A: 5V/2.4A*4, QC 18W*2 3*USB-C(PD): PD 45W*2, PD 65W*1

PHONE 10w
19.4
hours

drone 40w
48.6
hours

notebook 58W
33
hours

Rice cooker 820w
2.3
hours

fan 35w
55
hours

Electric oven 1000w
1.9
hours

Mobile refrigerator 45w
43
hours

Electric kettle 1600w
1.2
hours