

Instruction to Group Controlling

You can group-control the lights with a single remote.


For this, first please despair the remote control from their light respectively. Press the **ON** button on the remote control 5 times with 5 seconds to despair the remote controls from their corresponding lights. **(The light will flash 5 times to indicate the success of the despairing.)**

Choose one of the remote controls and press it **SETUP** button 5 times within 5 seconds to pair it with all of the lights. **(The lights will flash 3 times to indicate the success of pairing.)**

After the pairing, you can control all lights with this remote control.

(Note: Ensure the lights are turned on before carrying out this operation)

Dimmable Ceiling Light User Manual

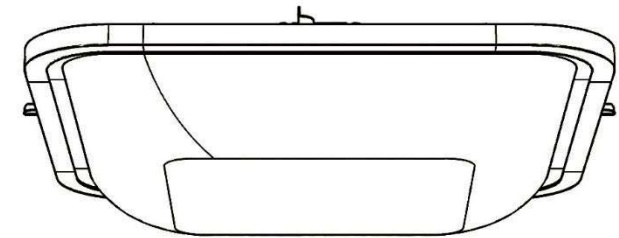

Note: This user manual is generic for model 11MCL001-36W-R11.V1, 11MCL002-48W-R11.V1 and 11MCL005-24W-15.

Specifications


Model	11MCL001-36W-R11.V1	11MCL002-48W-R11.V1
Voltage	110 V	110 V
Power	36 W	48 W
Overall Dimensions (L x W x H)	15 3/4" x 15 3/4" x 3 15/16" (40 x 40 x 10 cm)	25 9/16" x 16 15/16" x 3 15/16" (65 x 43 x 10 cm)

Model	11MCL005-24W-15
Voltage	110 V
Power	24 W
Overall Dimensions (L x W x H)	17 11/16" x 17 11/16" x 3 15/16" (45 x 45 x 10 cm)


Safety Instructions

1. The personnel who carry out the installation and operation of this product must have the related certifications, knowledge and working experience.
2. Any installation must not be carried out unless all the powers are turned off.
3. The power applied on the product should not exceed the rated voltage of the product.
4. Keep the small parts away from children in case of choking.
5. During the installation, please handle the edges carefully in case of cutting yourself.
6. Ensure the light is installed securely enough on your ceiling before use.
7. Do not expose the product to water, fire or other heating sources.


Package Contents



Ceiling Light Set x 1



Screw Sleeve x 4




Screw x 4



Remote Control x 1

Remote Control Operation Instructions

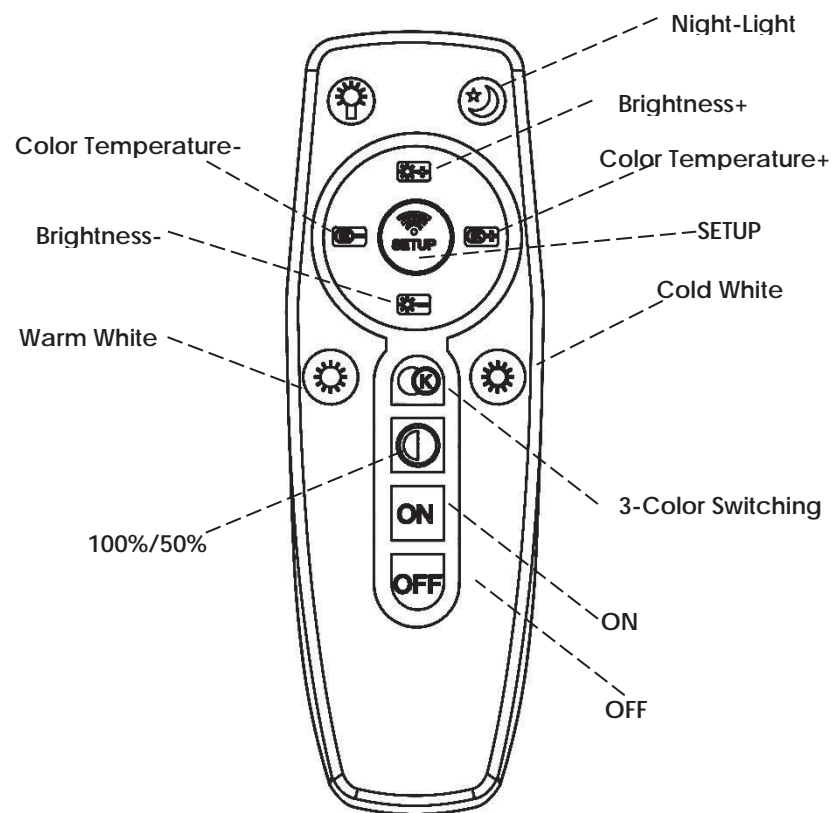

ON/OFF: Press these two buttons to turn on/off the light.

Brightness- / Brightness+: Press these two buttons to adjust the brightness.

Color Temperature- / Color Temperature+: Press these two buttons to adjust color temperature.

Night-Light: Press this button to enter night-light mode.


Warm White: Press this button to enter warm white mode.

Cold White: Press this button to enter cold white mode.

100%/50% Brightness: Press this button to switch between 100% / 50% brightness.


3-Color Switching: Press this button to switch between 3 colors.

4 Connect Lines to Wires

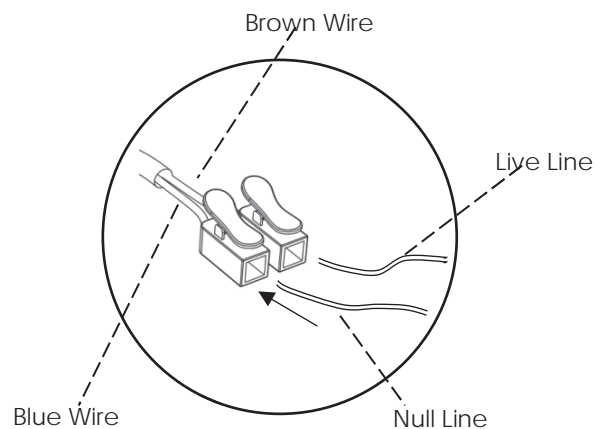


Connect the brown wire to your live line and blue wire to your null line.


Tools Required (Not Included)



Screw Driver



Hammer

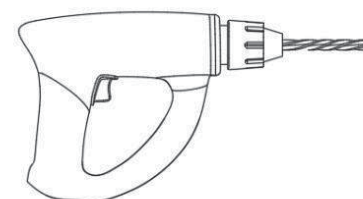

Electrical Driller




Pencil

Assembly Instructions


Ensure the power supply is turned off before assembly for safety concerns.

1 Drill Holes

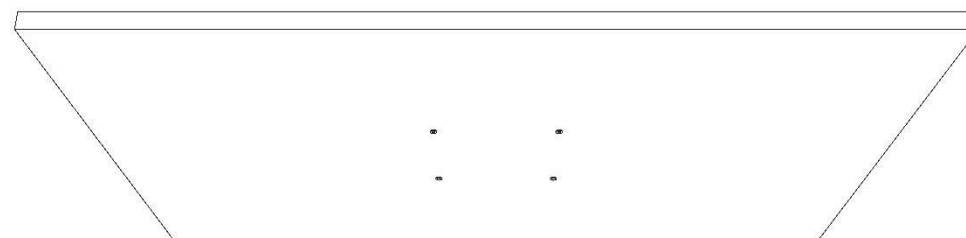


1. According to the location of holes on the ceiling light cover, mark 4 holes on your wall with pencil for installing ceiling light.
2. According to the size of screw sleeve, drill 4 standard holes on your wall with electric driller.

5 Install the Light Cover

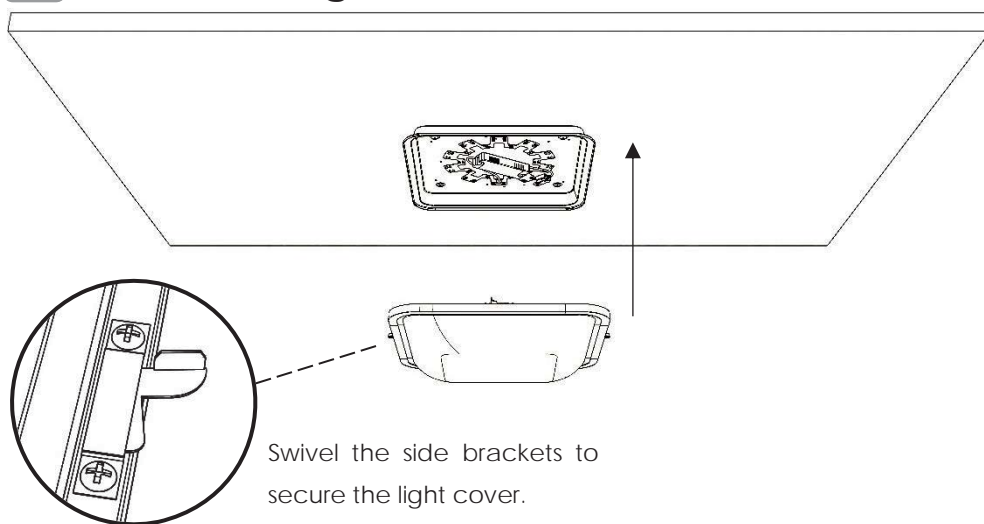


Install the light cover on the light base. After their edges engaged accordingly, swivel the side brackets to secure the light cover.

2 Install 4 Screw Sleeves

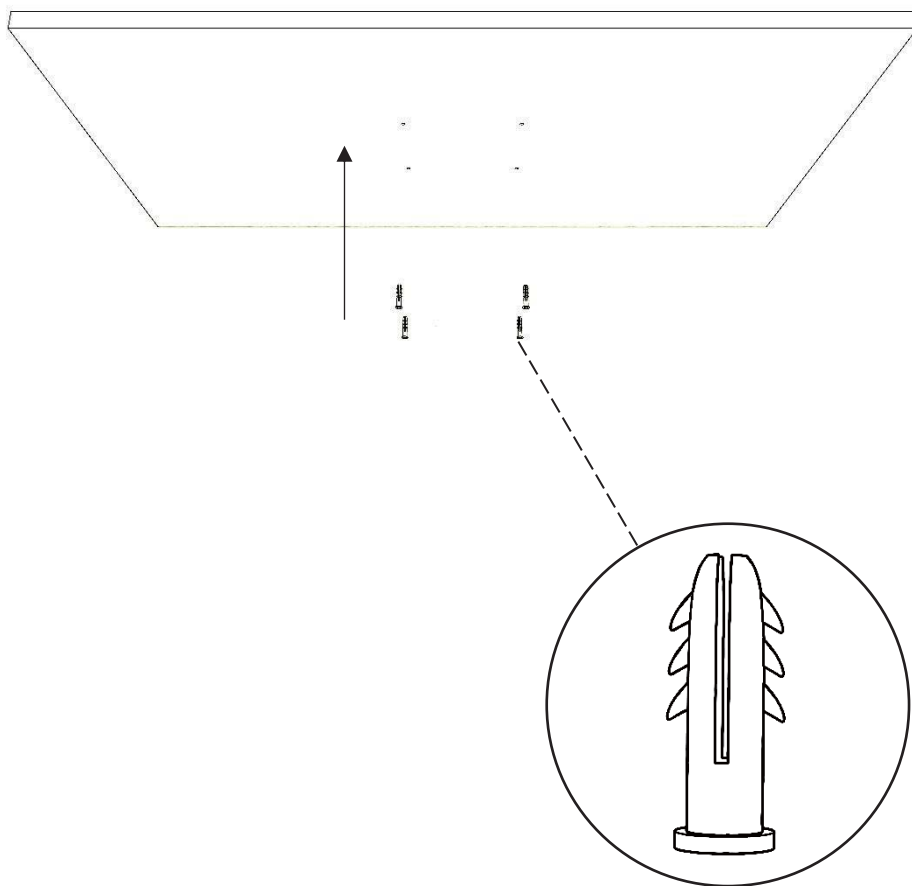

Install 4 screw sleeves into the 4 holes on the wall with hammer.

3 Install Light Base

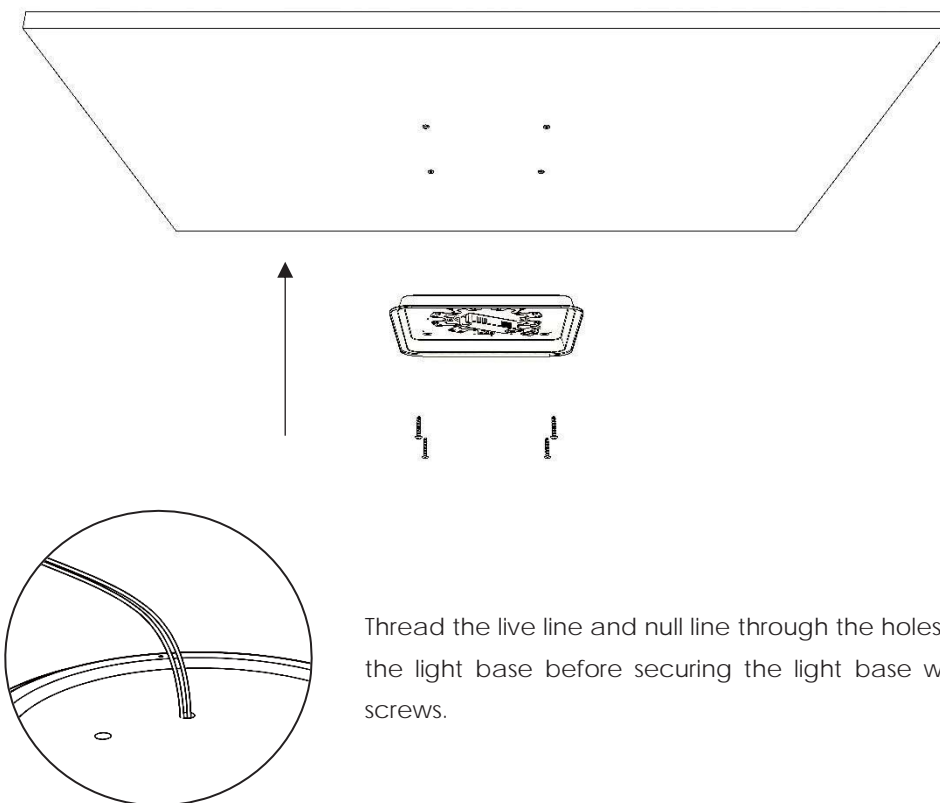

Thread the live line and null line through the holes of the light base before securing the light base with screws.

Put up ceiling light base beneath the wall and install your live line (not included) and null line (not included) through the nearest hole of ceiling light cover for connecting wires in later step. After that Use 4 screws to secure the light base.