


ELEVATIONS GRAVITY GRIP COLLECTION

ELEVATIONS GRAVITY GRIP COLLECTION

# elevations

FLOATING RESILIENT  
GRAVITY GRIP FLOORING

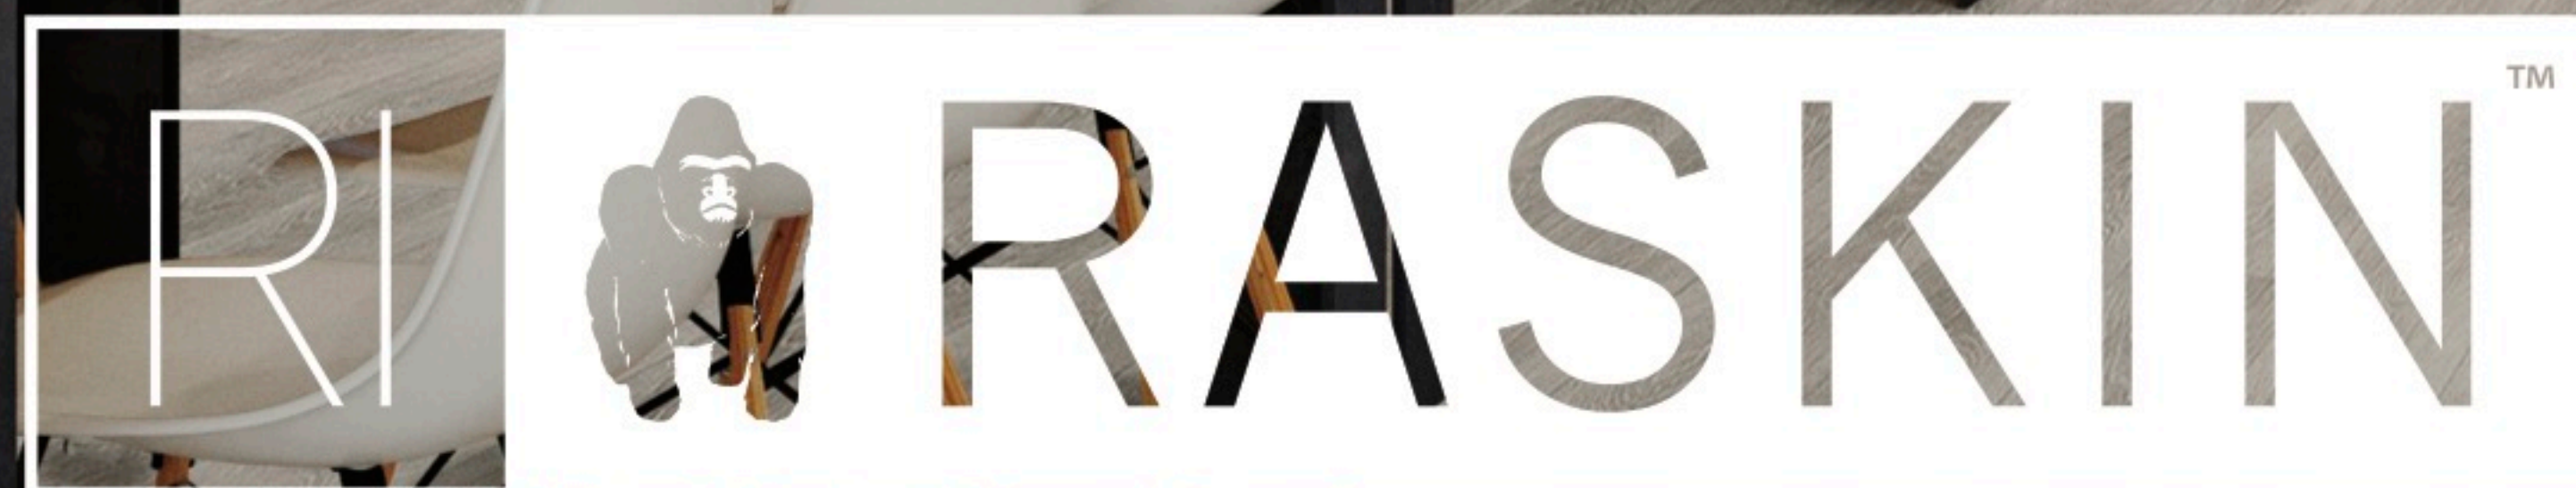

LOOSE LAY FLEXIBLE  
LVT FLOORING

BUILT IN SOLID FIBERGLASS SHEET  
FOR DIMENSIONAL STABILITY

**THICKNESS:** 5.0 MM | **WEAR LAYER:** 20 MIL | **FINISH:** G88 ADVANCED COATING TECHNOLOGY FOR ANTI-FUNGAL, ANTI-BACTERIAL, NO WAX, NO BUFF PROTECTION | **ASTM F1700:** PRODUCT CLASSIFICATION: CLASS III, TYPE B, EMBOSSED SURFACE – MEETS AND EXCEEDS PASSING REQUIREMENTS | **ASTM E648:** RADIANT PANEL (CRITICAL RADIANT FLUX-FIRE RATING FLAMING SPREAD) – MEETS AND EXCEEDS PASSING REQUIREMENTS (CLASS 1) | **ASTM-F925:** RESISTANCE TO CHEMICALS – MEETS AND EXCEEDS PASSING REQUIREMENTS | **ASTM F970:** STATIC LOAD LIMIT – MEETS AND EXCEEDS PASSING REQUIREMENTS | **STATEMENT:** RECYCLED MIDDLE CORE LAYER; PHTHALATE-FREE WEAR LAYER; MEETS AND EXCEEDS ISO-9001 (QUALITY MANAGEMENT SYSTEMS), ISO-14001 (ENVIRONMENTAL MANAGEMENT SYSTEMS) AND IS FLOORSCORE® CERTIFIED | **ASTM E492:** IMPACT SOUND INSULATION – 57 IIC | (OVER 6" CONCRETE WITH DROP CEILING) | **ASTM E2192:** IMPACT SOUND INSULATION (DELTA) – 18 IIC (OVER 6" CONCRETE WITH DROP CEILING) | **WARRANTY:** LIMITED LIFETIME RESIDENTIAL / 15 YEAR COMMERCIAL

SIZE: 7.08'' X 47.24'' | PCS/CTN: 10 | SQ.FT/CTN: 23.25

SIZE: 12'' X 24'' | PCS/CTN: 10 | SQ.FT/CTN: 20



**FLOORS BEYOND LIMITS™**





ELEV20 410 **BIRCH**



ELEV20 105 **BOWERY**



ELEV20 101 **SOHO**



ELEV20 403 **HAMPTON WHITE OAK**



ELEV20 413 **ROSEWOOD**



ELEV20 401 **RECLAIMED WOOD**



ELEV20 301 **CHATEAU**



ELEV20 302 **COUNTRY HOME**



ELEV20 303 **AVIGNON**