



FLOORNATION COLLECTION

FLOORNATION COLLECTION

FN FLOORNATION

RIRASKIN™

FLEXIBLE GLUEDOWN

LVT

COMMERCIAL GRADE FLOORS

THICKNESS: 3.0MM (PRIDE), 4.0MM (GLORY) | **WEAR LAYER:** 20 MIL | **FINISH:** G88 ADVANCED COATING TECHNOLOGY FOR ANTI-FUNGAL, ANTI-BACTERIAL, NO WAX, NO BUFF PROTECTION | **ASTM-D2047:** COEFFICIENT OF FRICTION (JAMES MACHINE) MEETS AND EXCEEDS PASSING REQUIREMENTS >.6 | **ASTM-E648:** CRITICAL RADIANT FLUX – MEETS AND EXCEEDS PASSING REQUIREMENTS FOR CLASS I | **ASTM-E662:** SMOKE DENSITY – MEETS AND EXCEEDS PASSING REQUIREMENTS - <450 | **ASTM-E648:** CRITICAL RADIANT FLUX – MEETS AND EXCEEDS PASSING REQUIREMENTS FOR CLASS I | **ASTM-E662:** SMOKE DENSITY – MEETS AND EXCEEDS PASSING REQUIREMENTS - <450 | **ASTM-F925:** RESISTANCE TO CHEMICALS – MEETS AND EXCEEDS PASSING REQUIREMENTS | **ASTM-F1515:** RESISTANCE TO LIGHT – MEETS AND EXCEEDS PASSING REQUIREMENTS | **ASTM-F1514:** RESISTANCE TO HEAT – MEETS AND EXCEEDS PASSING REQUIREMENTS | **ASTM-F970:** STATIC LOAD LIMIT – MEETS AND EXCEEDS PASSING REQUIREMENTS – 1,000 PSI MODIFIED | **SUSTAINABILITY STATEMENT:** CONTAINS NO RECYCLED CONTENT; PHTHALATE-FREE; MEETS AND EXCEEDS ISO-9001(QUALITY MANAGEMENT SYSTEMS), ISO-14001 (ENVIRONMENTAL MANAGEMENT SYSTEMS) AND IS FLOORSCORE® CERTIFIED | **WARRANTY:** PRIDE - LIFETIME RESIDENTIAL / 15 YEAR COMMERCIAL GLORY - LIFETIME RESIDENTIAL / 20 YEAR COMMERCIAL

7.08'' X 47.24'' | PCS/CTN: 15 | SQ.FT/CTN: 34.88

12'' X 24'' | PCS/CTN: 18 | SQ.FT/CTN: 36

9.25'' X 59.25'' | PCS/CTN: 8 | SQ.FT/CTN: 30.46



FLOORS BEYOND LIMITS™





FN 17 FAIRBANKS



FN 14 VALLEY



FN 11 APPLE WOOD



FN 08 TERRAIN



FN 30 MARTHA'S VINEYARD



FN 31 BRISTOL




FN 06 PLYMOUTH



FN 12 CANYON



FN 20 BLISS

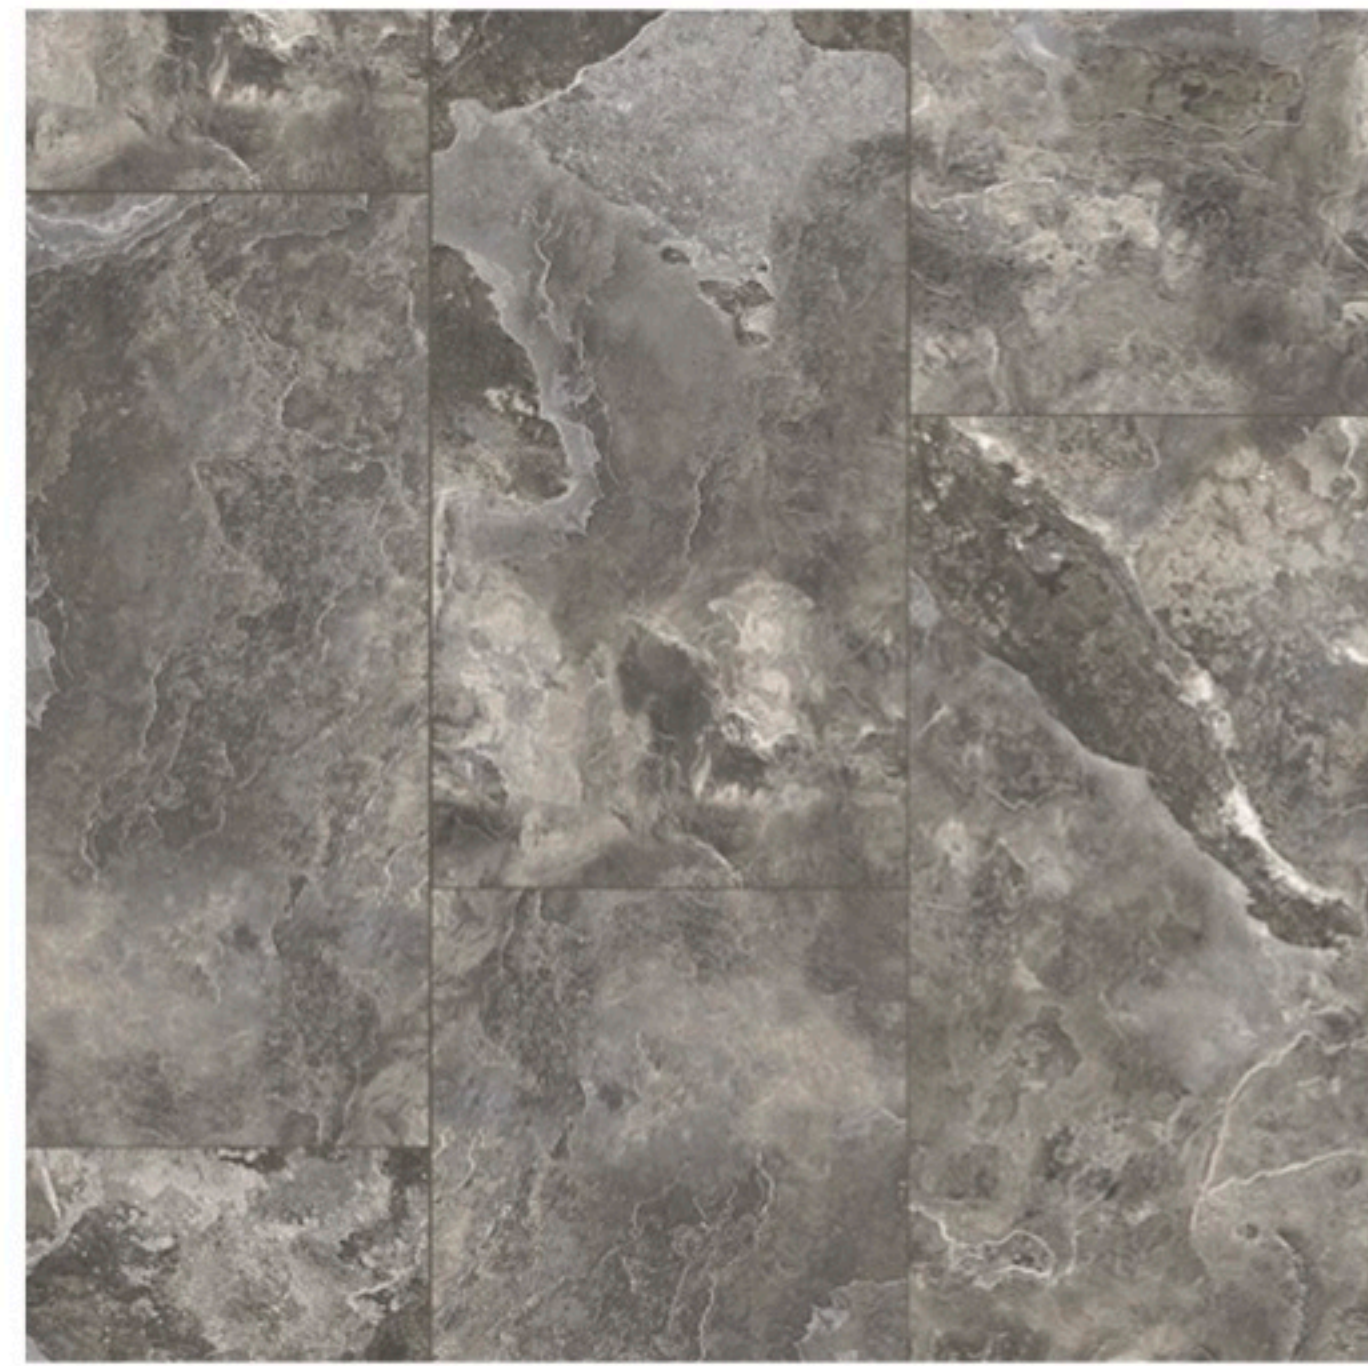

FN 22 ROCKINGHAM