


# SENTRY WELLNESS SYSTEM INSTALLATION INSTRUCTIONS

## Direct RO Replacement

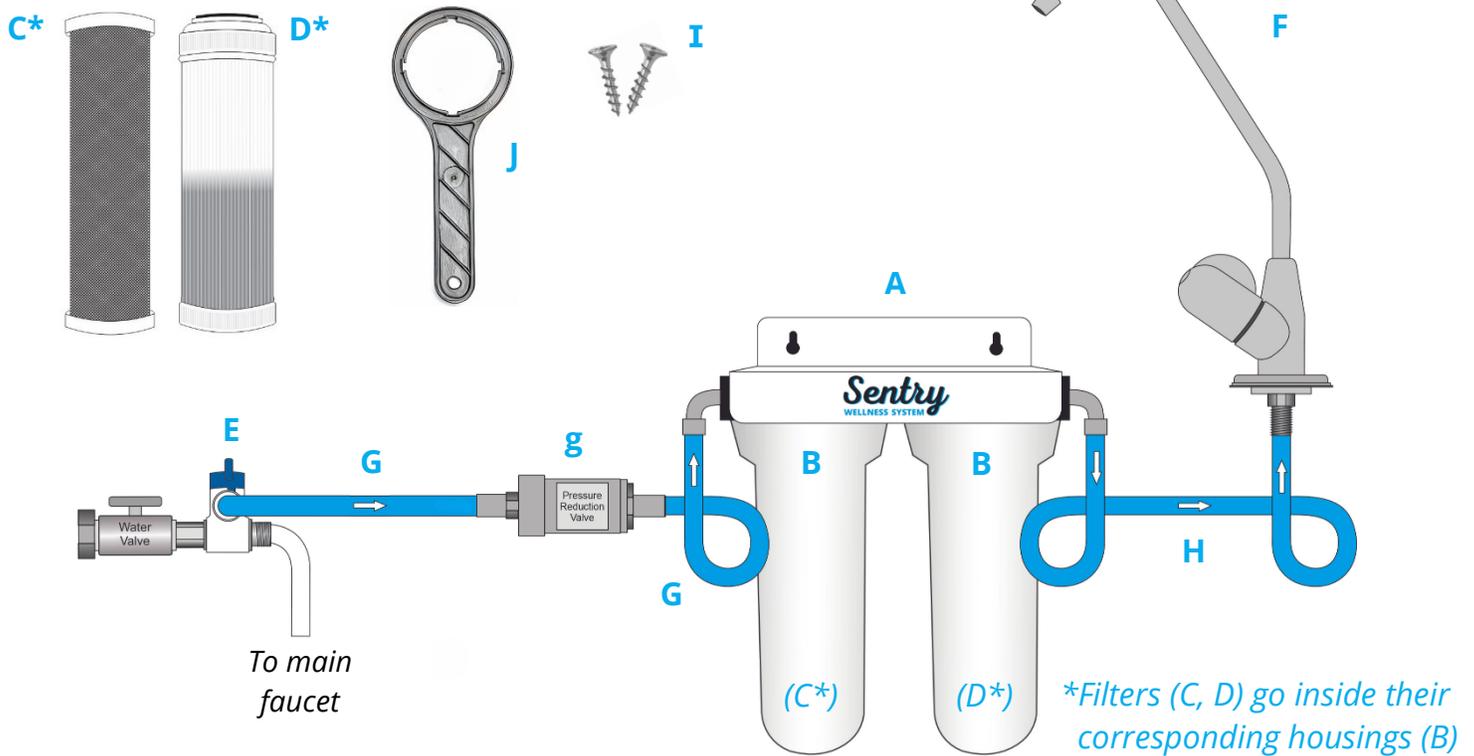

### Sentry Wellness System Direct RO Replacement Contents (P/N: CP-SWS-DRR):

- |   |   |
|---|---|
| A) 1 Pre-Installed White Bracket  | G) 1 ¼" Tubing for Cold Water-to-Inlet Connection (with PRV installed in-line, g) |
| B) 2 Clear Housings with O-Rings (Labels indicate corresponding filter) | H) 1 ¼" Tubing for Outlet-to-Faucet Connection                                    |
| C) 1 Catalytic Carbon Filter  | I) 2 Screws (for mounting)  |
| D) 1 Trappsorb Drop-In Filter   | J) 1 Wrench (for removing housings when changing filters. NOT FOR TIGHTENING.)    |
| E) 1 Angle Stop Water Flow Valve  |   |
| F) 1 Faucet   |   |

Verify you have the necessary components listed above before starting installation.

**IMPORTANT: DO NOT REMOVE PLASTIC WRAP FROM FILTERS UNTIL STEP 2.**

### Tools Needed (Not Included):

- 1-2 Adjustable Wrenches/Pliers
- Drill with a Philips Head Drill Tip



**Scan QR Code to watch installation video or visit [SentryH2O.com](https://www.SentryH2O.com)**

*\*Please note this video shows the process for installing the Sentry Wellness System under the sink. The installation process is similar, but be sure to refer to these instructions for the Direct RO Replacement steps. A video for Direct RO Replacements is coming soon, so in the meantime, please don't hesitate to contact us if you have any questions!*



1-833-377-3817



CleanWater@SentryH2O.com



SentryH2O.com

- STEP 1:** Choose location for installation (i.e. cabinet wall under the sink) and mount the system bracket using the provided screws. We recommend using a sharpie or pen to mark the mount points, then drill the screws, then place system bracket on screws.
- STEP 2:** Remove plastic wrap from filters and place the filters into their corresponding housings. **The Catalytic Carbon Filter MUST be placed into the Catalytic Carbon Housing on the left side of the system and the Trappsorb Drop-In Filter MUST be placed into the Trappsorb Housing on the right side of the system.** Unwrap and place each filter one at a time to avoid mixing them up. Twist the housings closed by hand until the labels are facing forward. **To prevent leaks, DO NOT OVERTIGHTEN**—hand tightening creates the most effective seal.
- STEP 3:** Identify the cold water source by turning your faucet on to 100% cold and then shut off the cold water flow by turning the corresponding water valve clockwise. This valve should remain off for the entire installation process.
- STEP 4:** Using an adjustable wrench, remove the faucet line from the cold water valve. Position a container beneath the valve to catch water from the line. Place the Angle Stop Water Flow Valve between the water line and the faucet inlet side. This will redirect water to the Sentry Wellness System.
- STEP 5:** Locate the provided cold water-to-inlet connection tubing with the pre-installed PRV valve. With the PRV arrow facing towards the system, push the tube end furthest from the system into the Angle Stop Water Flow Valve and push the other tube end into the Inlet Head (Catalytic Carbon Housing lid). Tug on the line to ensure a tight fit.
- STEP 6:** Mount the faucet using the instructions on the faucet box.
- STEP 7:** Measure and cut the ¼" plastic tubing as needed. Then insert tube into the provided faucet and the Outlet Head (Trappsorb Housing lid) until the tube bottoms out. Tug on the line to ensure a tight fit.
- STEP 8:** Restore the cold water flow by turning the cold water valve counter-clockwise with your faucet on. Check for leaks at the fitting locations or housing gasket locations. If there is a leak, ensure the tubes are fully pushed in and reset the housings by repeating Step 2. Check for leaks again and once you turn off your faucet. Monitor for 1 week.
- STEP 9:** Keep the cold water running for 5-10 minutes to purge the system of excess carbon dust and trappsorb dust. If water appears cloudy and doesn't taste sweet, continue to purge the system for another 5 minutes or until the water runs clear. As the system normalizes, you may notice reduced water pressure for up to 1 week.
- STEP 10:** Replace both filters annually and enjoy your new Wellness System! If you have any questions or concerns, please contact us at the phone number or email below.



1-833-377-3817



CleanWater@SentryH2O.com



SentryH2O.com