


SENTRY WELLNESS SYSTEM INSTALLATION INSTRUCTIONS

Fridge Connection

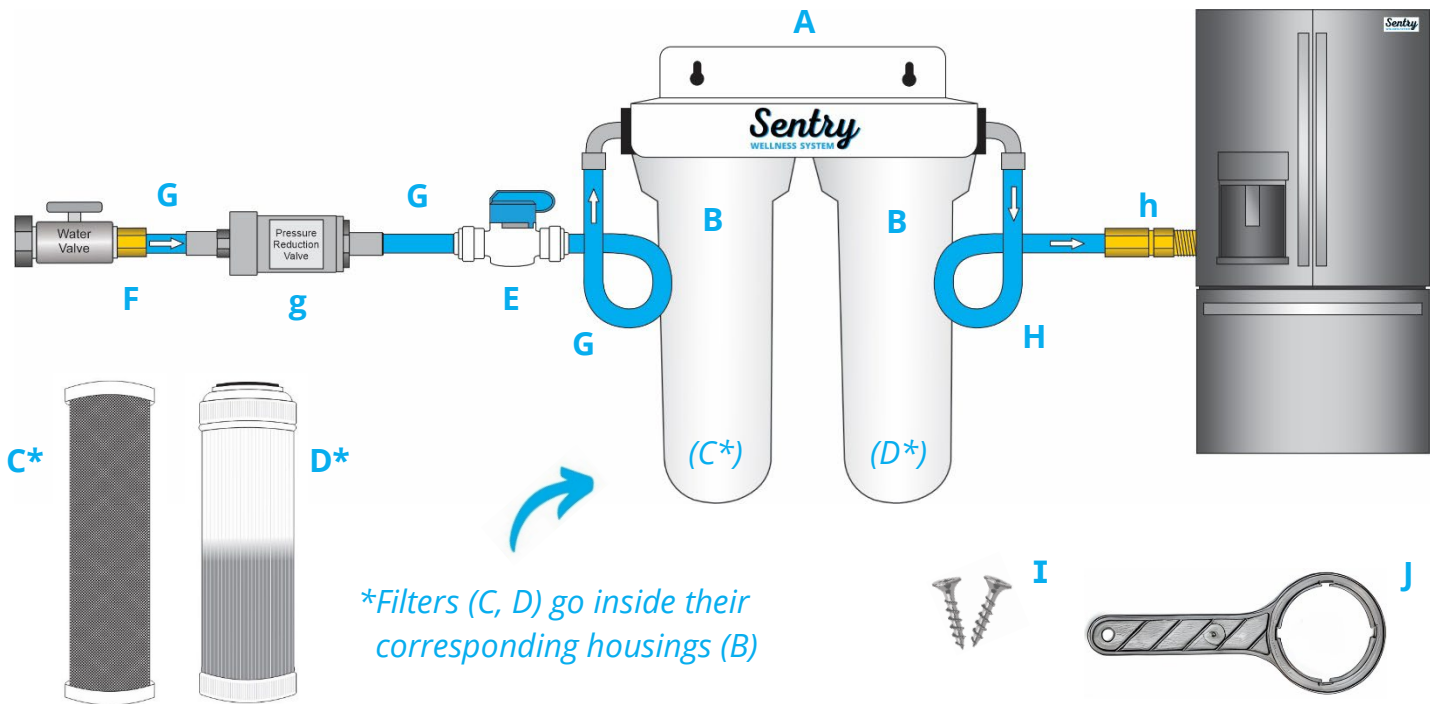

Sentry Wellness System Fridge Connection Contents (P/N: CP-SWS-FC):

- | | |
|--|---|
| A) 1 Pre-Installed White Bracket | G) 1 1/4" Tubing for Cold Water-to-Inlet Connection (with PRV installed in-line, g) |
| B) 2 Clear Housings with O-Rings
(Labels indicate corresponding filter) | H) 1 1/4" Tubing for Outlet-to-Fridge Connection (with male fitting, h) |
| C) 1 Catalytic Carbon Filter | I) 2 Screws (for mounting) |
| D) 1 Trappsorb Drop-In Filter | J) 1 Wrench (for removing housings when changing filters. NOT FOR TIGHTENING.) |
| E) 1 In-Line Shut-Off Ball Valve | |
| F) 1 1/4" Female Crush Collet | |

Verify you have the necessary components listed above before starting installation.

IMPORTANT: DO NOT REMOVE PLASTIC WRAP FROM FILTERS UNTIL STEP 2.

Tools Needed (Not Included):

- 1-2 Adjustable Wrenches/Pliers
- Drill with a Philips Head Drill Tip

Scan QR Code to watch installation video or visit SentryH2O.com

*Please note this video shows the process for installing the Sentry Wellness System under the sink. The installation process is similar, but be sure to refer to these instructions for the fridge connection. A video for the fridge connection is coming soon, so in the meantime, please don't hesitate to contact us if you have any questions!



- STEP 1:** Choose location for installation (i.e. cabinet wall next to your fridge) and mount the system bracket using the provided screws. We recommend using a sharpie or pen to mark the mount points, then drill the screws, then place system bracket on screws.
- STEP 2:** Remove plastic wrap from filters and place the filters into their corresponding housings. **The Catalytic Carbon Filter MUST be placed into the Catalytic Carbon Housing on the left side of the system and the Trappsorb Drop-In Filter MUST be placed into the Trappsorb Housing on the right side of the system.** Unwrap and place each filter one at a time to avoid mixing them up. Twist the housings closed by hand until the labels are facing forward. **To prevent leaks, DO NOT OVERTIGHTEN**—hand tightening creates the most effective seal.
- STEP 3:** Identify the cold water source for your fridge and turn the water valve counter-clockwise to the OFF position. This valve should remain off for the entire installation process.
- STEP 4:** Using an adjustable wrench, remove the fridge line from the cold water valve. Position a container beneath the valve to catch water from the line.
- STEP 5:** Locate the provided cold water-to-inlet connection tubing with the pre-installed PRV valve, pre-installed shut-off ball valve, and female crush collet (held on via tape). Remove tape from collet and check its connection. With the PRV arrow facing toward the system, push the collet onto the water connection at the wall and tighten with an adjustable wrench. Tug on the line to ensure a tight fit.
- STEP 6:** Using the provided outlet-to-fridge tubing with the male fitting, thread the fitting onto the fridge line carefully to avoid cross-threading (this is the line that was removed from the cold water valve in Step 4). Tighten by hand and then use 1 or 2 adjustable wrenches to fully tighten. Tug on the line to ensure a tight fit.
- STEP 7:** Using the cold water-to-inlet connection tubing from Step 5, push the tube end into the Inlet Head (Catalytic Carbon Housing lid) until the tube bottoms out or can no longer be pushed in. Tug the tube to set the connection. Then push the outlet-to-fridge tubing from Step 6 into the Outlet Head (Trappsorb Housing lid) until the tube bottoms out. Tug to ensure tight fit.
- STEP 8:** Restore the cold water flow by turning the cold water valve counter-clockwise (ON). Check for leaks at the fitting locations or housing gasket locations. If there is a leak, ensure the tubes are fully pushed in and reset the housings by repeating Step 2. Check for leaks again and once you turn off your faucet. Monitor for 1 week.
- STEP 9:** Purge the system for 5-10 minutes to remove the excess carbon dust and trappsorb dust. If water appears cloudy and doesn't taste sweet, continue to purge the system for another 5 minutes or until the water runs clear. As the system normalizes, you may notice reduced water pressure for up to 1 week.
- STEP 10:** Replace both filters annually and enjoy your new Wellness System! If you have any questions or concerns, please contact us at the phone number or email below.