

WARNINGS & GUIDELINES!

It is critical that FLATED products are properly installed and attached per the guidelines provided in the user manual (also available at www.getflated.com). Thoroughly read and understand the instructions, cautions and tips provided with your FLATED product prior to installing or using. You are responsible for the correct and safe use of your product(s). In any instance of mis-understanding or inability to complete the required installation steps with accuracy, you should hire a professional installer to execute.

Users must understand and take all necessary precautions in an effort to prevent misuse, accidents and/or damage. Always check all attachments to ensure secure installation prior to use. Regular inspection should occur for wear, damage or adjustment needs. Improper attachment and/or installation may result in serious bodily injury or death to you, your pet or others. Always use recommended and supplied parts when installing products. Using alternative pieces or solutions may result in unsafe installation and potential accidents.

FLATED maximum load specifications must be acknowledged as a starting point. Your vehicle may have varying weight capacity, at the advisement of the manufacturer, that needs to be taken into consideration. Your maximum load weight should not exceed the weight of the product + all installation accessories + items stored in/on the product.

When installing the FLATED products to the roof of your vehicle, all doors and windows should be open.

All FLATED products should have windows, flaps, straps, locks, zippers and Velcro fastened tightly and checked before each trip and at any stops. Straps, cam locks, d-rings, zippers and Velcro should be checked regularly for any signs of wear, corrosion, deterioration, etc.

For FLATED products installed on the exterior, make sure to be aware of the vehicle height, including the product. Special considerations should be taken when driving through or into garages, bridges, low hanging foliage, etc.. Remove exterior products when not in use or before entering a car wash.

Exterior products may cause a change in your

vehicle's driving behavior such as increased wind resistance and reduced fuel efficiency. Take extra precautions when driving in intensified weather conditions. Always follow local speed limits and road cautions, adjusting as necessary to consider your cargo.

Any locking of exterior storage products is meant to hinder theft. FLATED products are not theft-proof and valuables should be removed when unattended.

Temperature may affect sensitive items stored within your product. Therefore, attention to high or low weather fluctuations are necessary to help protect your belongings and pets.

Use of FLATED products for any purpose other than those for which they were designed is prohibited. Failure to follow installation or use guidelines will cause the warranty to void.

NEVER place an infant under 15 months of age on or in any FLATED product due to risk of suffocation. Entrapment may occur between vertical spaces and supervision should be maintained at all times when a child is in the vicinity of products.

ALWAYS keep products fully inflated to suggested PSI whenever in use.

DO NOT over inflate past suggested PSI due to the risk of explosion and bodily injury or death. This risk must be particularly taken into consideration when using electronic or battery powered inflation pumps.

NEVER use as a personal flotation or life saving device. Products are not intended to be used in water.

DO NOT stand or jump on your FLATED product. KEEP product away from fire and extreme heat.

NEVER use flammable substances (such as aerosol tire repair products) to inflate your product due to explosion or ignition risk.

DO NOT use chemicals on your product. Mild soap and water should be used when cleaning.

ALWAYS be mindful of what is stored in your product with your pet. Leashes, collars, toys and other items should be removed to prevent snagging, strangulation or choking. Pet-specific beds should be used in lieu of blankets.

DO NOT leave your pet in your FLATED product for extended periods of time. Generally, no longer than they can hold their bowels.

LIMITED WARRANTY!

FLATED guarantees to warranty all FLATED branded products under the original purchaser, for 1 year after original purchase date. The guarantee covers only products manufactured by FLATED and covers manufacturer's defects ONLY.

The original purchaser/owner of the product must provide this Term of Warranty when requesting warranty claims and/or repair services, under the terms provided at www.getflated.com.

GOTO - WWW.GETFLATED.COM/PAGES/WARNING-GUIDELINES FOR MORE INFORMATION



AIR-STORAGE

INFLATABLE WET/DRY STORAGE

INSTRUCTIONS, WARRANTY, AND PRODUCT INFORMATION

CONGRATULATIONS!
YOU GOT FLATED.



HOW-TO VIDEOS

SCAN THIS!



**INFLATION, INSTALLATION, &
DEFLATION, HOW TO VIDEOS**

www.flated.com/pages/instructions

CUSTOMER SERVICE

SCAN THIS!




**SPEAK TO A LIVE AGENT
TO ANSWER QUESTIONS**

www.flated.com/pages/contact-us

GETTING TO KNOW YOUR AIR-STORAGE...

1. Air-Storage single chamber
2. Easy grab carry handle
3. Single high pressure valve
4. Padded shoulder strap
5. 2x D-Rings / to attach shoulder strap
6. YKK water-resistant lid zippers
7. 3x Velcro attached dividers/shelves
8. Air-Storage hanging strap
9. Padded lid and bottom
10. Insulated interior

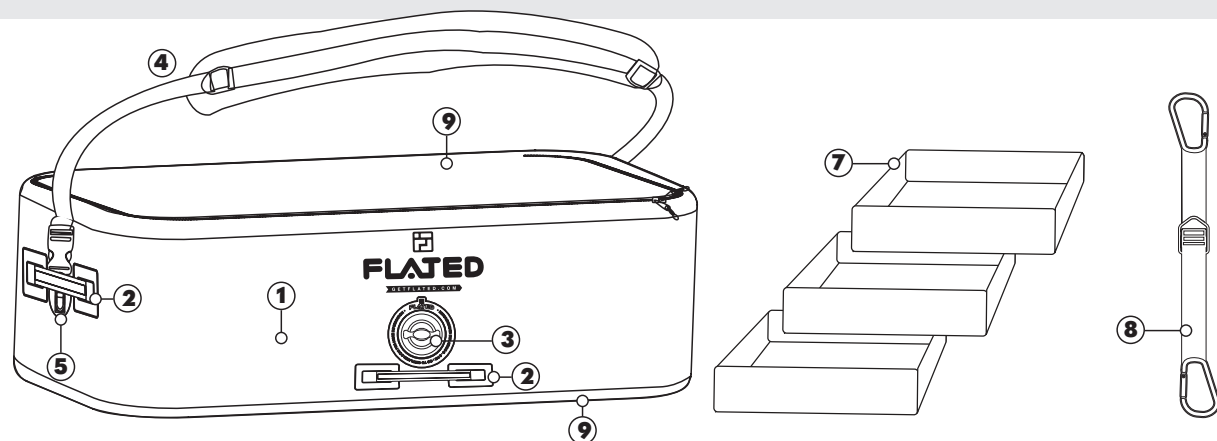


HOW TO OPERATE THE VALVE

VALVE INSTRUCTIONS:

1. Twist counter clockwise to remove the valve cap
2. Push the yellow valve spring down and turn counter clockwise to pop up for inflation
3. Connect your pump nozzle to the valve to inflate by putting pressure to seat the nozzle into the valve and turn clockwise to lock (then start pumping)
4. After desired PSI is reached (recommended 5 to 8 PSI), put the valve cap back on **Yellow spring should still be in the up position**

DEFLATION INSTRUCTIONS:

1. Remove valve cap
2. Push yellow valve spring down and twist clockwise, use the pump to remove all of the air (be prepared for a big burst of air to come out when you initially push the yellow valve spring down).
3. Change included pump hose to the "deflate" side on the pump handle and connect to valve (and start pumping), to pull all of the air out until completely flat

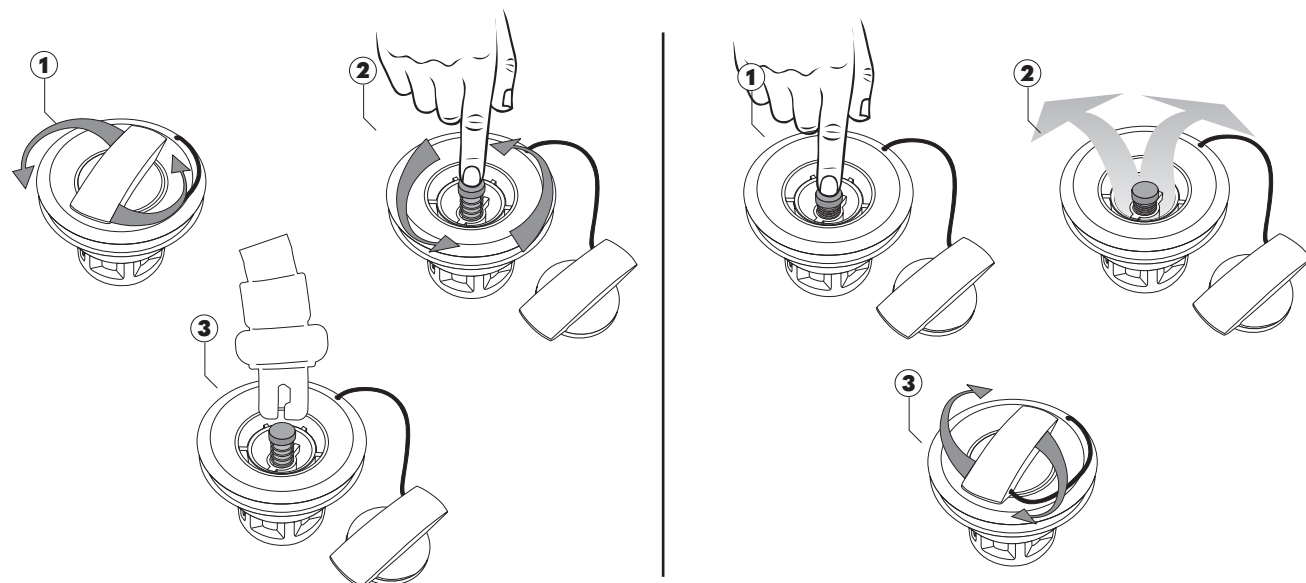

If you own a shop vac you can put the hose on the exhaust side to fill up your Air-Storage much faster. Make sure the yellow spring valve is open (pushed down and turned in the clockwise direction), then you can blow air into the Air-Storage valve and quickly release the yellow spring valve once it takes its shape. You will then need to attach the pump to get it

to 5 to 8 PSI and make sure you put the valve cap back on while using the Air-Storage fully inflated.

When deflating you can push yellow spring valve clockwise and put the hose on the vacuum side of your shop vac and quickly and fully remove all of the air. Removing all of the air makes it easier to get back in the bag for more compact storage.

SETTING UP YOUR AIR-STORAGE

SETUP INSTRUCTIONS:

1. Remove the Air-Storage from the bag and unroll
2. Locate the air valve at the side
3. Remove the valve cap
4. Push yellow valve spring and rotate counter clockwise to make sure it pops up
5. Connect your pump nozzle to the valve to inflate by putting pressure to seat the nozzle into the valve and turn clockwise to lock (then start pumping)
6. Inflate to 5 to 8 PSI which will be indicated on the pump gauge
7. Connect padded shoulder strap to side D-Rings
8. Place dividers perpendicular until back hits the bottom and rotate to engage the Velcro sides

3. REMOVE THE VALVE COVER



4. PUSH AND ROTATE VALVE COUNTER CLOCKWISE



5. ATTACH PUMP HOSE AND INFLATE 5 TO 8 PSI



6. INFLATE 5 TO 8 PSI

