






SUBMITTAL DATA SHEET

ACIQ-18W-HH-MB	18,000 BTU/H(208/230V)	Wall Mounted Heat Pump System
Location: _____	Approval: _____	
Engineer: _____	Date: _____	
Submitted to: _____	Construction: _____	
Submitted by: _____	Unit #: _____	
Reference: _____	Drawing #: _____	

Indoor unit code	22022011016461	
Set Model		
Indoor unit model	ACIQ-18W-HH-MB	
Certified	AHRI	
	UL	



INDOOR UNIT DATA		
Indoor fan motor		
Type		Cross-Flow
Model		ZKFP-30-8-3-10
Qty		1
Input	(W)	36.0
RLA	(A)	0.4
LRA	(A)	---
Winding Resistance	(Ω)	---
Capacitor	(uF)	---
Speed(Hi/Mi/Lo)	(r/min)	1240/1024/916
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (N)	(CFM)	523.53/376.47/305.88
Indoor noise level (Hi/Med/Lo)	[dB(A)]	46.5/43/32.5
Dehumidification	(Pint/H)	---
Indoor unit		
Dimension (WxDxH)	(inch)	40.06x9.72x12.60
	(mm)	1017.4x246.9x320
Packing(WxDxH)	(inch)	43.11x12.80x15.75
	(mm)	1095x325x400
Net/Gross weight	(lbs.)	27.12/35.71
	(kg)	12.3/16.2
Indoor(cooling)	(Deg. °F / °C)	60~90 / 16~32
Indoor(heating)	(Deg. °F / °C)	32~86 / 0~30
Application area	(sq.ft)	1.3
	(m2)	21x13.37

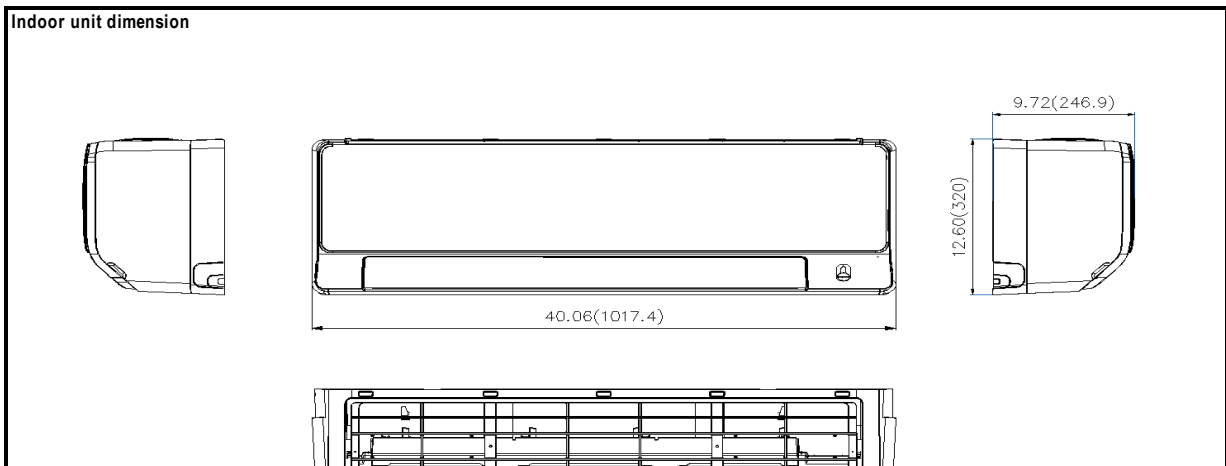



General Features

- Intelligent Eye(optional)
- Easy Installation
- Easy Maintenance
- Easy Clean
- High Efficiency
- Wireless Remote with LCD Display

Extended Performance Data