

GPGM3/GPUM3

R-32 PACKAGED GAS / ELECTRIC UNITS
UP TO 13.4 SEER2 / 81% AFUE
2 TO 5 TONS



Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	6
Airflow Data	20
Dimensions	25
Wiring Diagrams	26
Accessories	29



R32

Standard Features

- Energy-efficient scroll compressor
- Multi-speed ECM indoor blower motor
- Convertible airflow: horizontal or downflow application
- All-aluminum evaporator coil
- Power-assisted combustion
- Direct spark ignition system includes a microprocessor-based control for the entire ignition sequence, all blower operation, and all safety circuits complete with self-diagnostics
- All models comply with California Low NOx standards (40ng/J NOx)
- GPGM3 models comply with California Low NOx standards (40ng/J NOx), but are not eligible for installation in California's South Coast Air Quality Management District (SCAQMD), San Joaquin Valley Air Pollution Control District (SJVAPCD), or Bay Area Air Quality Management District (BAAQMD).
- GPUM3 models comply with the SCAQMD Rule 1111, the SJVAPCD Rule 4905, and the BAAQMD Rule 9-4 14 ng/J NOx emission limit.
- AHRI Certified; UL Listed

Cabinet Features

- High-quality UV-resistant powder-paint finish
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Convenient access panels
- One roof curb fits all units
- Fully insulated cabinet
- Bottom, 2" high base rails for easier handling
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- One footprint for all tonnages

20 YEAR HEAT EXCHANGER LIMITED WARRANTY*

10 YEAR PARTS LIMITED WARRANTY*



COMPANY WITH ENVIRONMENTAL SYSTEM CERTIFIED BY DNV GL
■ ISO 14001 ■

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV GL
■ ISO 9001 ■



* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the 20-Year Heat Exchanger Limited Warranty (good for as long as you own your home), and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration and some of the additional requirements are not required in Florida, California, or Québec. The duration of warranty coverage in Texas and Florida differs in some cases. Other limitations and exclusions apply; refer to complete warranty details for a full list of limitations and exclusions.

	G	P	G	M	3	36	080	3	1	A	A	
	1	2	3	4	5	6,7	8,9,10	11	12	13	14	
Brand												Minor Revision
G - Goodman												A
Product Category												Major Revision
P - Packaged Unit												A
Unit Type												Electrical
G - Gas/Electric												1 - 208/230V single-phase, 60 Hz
D - Dual Fuel												3 - 208/230 V,3 Phase, 60 Hz
U - Ultra Low NOx												Refrigerant
												3 - R-32
Airflow												Heat Input
M - Multi-position												040 40 MBTU/H 080 80 MBTU/H 120 120 MBTU/H
												060 60 MBTU/H 100 100 MBTU/H
Efficiency												Tonnage Nominal
3 - 13.4 SEER2												24 - 2 tons 42 - 3½ tons
5 - 15.2 SEER2												30 - 2½ tons 48 - 4 tons
												36 - 3 tons 61 - 5 tons

	GPGM3 2404031	GPGM3 2406031	GPGM3 3004031	GPGM3 3006031	GPGM3 3604031
COOLING CAPACITY					
Total BTU/h	22,800	22,800	28,600	28,600	33,800
Sensible BTU/h	18,206	18,206	22,637	22,637	26,347
SEER2	13.4	13.4	13.4	13.4	13.4
EER2	10.6	10.6	10.6	10.6	10.6
Decibels	78	78	76	76	76
HEATING CAPACITY					
Input BTU/h	40,000	60,000	40,000	60,000	40,000
Output BTU/h	32,400	48,600	32,400	48,600	32,400
AFUE	81	81	81	81	81
Temperature Rise Range	25-55	30-60	25-55	30-60	25-55
No. of Burners	2	3	2	3	2
EVAPORATOR MOTOR					
Type	ECM	ECM	ECM	ECM	ECM
Wheel (D x W)	10" x 8"	10" x 8"	10" x 8"	10" x 8"	10" x 9"
Indoor Nominal CFM	760	760	1,000	1,000	1,150
No. of Speeds	5	5	5	5	5
Indoor Blower FLA	3.8	3.8	3.8	3.8	3.8
Horsepower	1/2	1/2	1/2	1/2	1/2
EVAPORATOR COIL					
Face Area (ft ²)	4.35	4.35	4.35	4.35	4.35
Rows Deep/Fins per Inch	3/14	3/14	3/14	3/14	4/14
Piston Size (Cooling)	0.047	0.047	0.053	0.053	0.055
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	59	59	57	57	75
CONDENSER FAN / COIL					
Outdoor Fan FLA	0.95	0.95	1.4	1.4	1.4
Horsepower	1/6	1/6	1/4	1/4	1/4
Blade Diameter	22"	22"	22"	22"	22"
Outdoor Nominal CFM	2,434	2,434	2,793	2,793	2,617
Face Area (ft ²)	12.3	12.3	12.3	12.3	11.13
Rows Deep/Fins per Inch	1/24	1/24	1/24	1/24	2/27
COMPRESSOR					
Type	Scroll	Scroll	Scroll	Scroll	Scroll
Stage	1	1	1	1	1
RLA	10.2	10.2	12.8	12.8	13.4
LRA	59.3	59.3	76.0	76.0	83.3
ELECTRICAL DATA					
Voltage (Frequency 60Hz)	208/230	208/230	208/230	208/230	208/230
Phase	1	1	1	1	1
Min. Circuit Ampacity	17.6	17.6	21.2	21.2	22
Max. Overcurrent Protection	25	25	30	30	35
OPERATING / SHIP WEIGHTS (LBS)	370 / 380	370 / 380	380 / 410	380 / 410	400 / 410

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.

PRODUCT SPECIFICATIONS

	GPGM3 3606031	GPGM3 3608031	GPGM3 4206031	GPGM3 4208031	GPGM3 4806031
COOLING CAPACITY					
Total BTU/h	33,800	33,800	39,000	39,000	46,000
Sensible BTU/h	26,347	26,347	29,621	29,621	35,696
SEER2	13.4	13.4	13.4	13.4	13.4
EER2	10.6	10.6	10.6	10.6	10.6
Decibels	76	76	78	78	79
HEATING CAPACITY					
Input BTU/h	60,000	80,000	60,000	80,000	60,000
Output BTU/h	48,600	64,800	48,600	64,800	48,600
AFUE	81	81	81	81	81
Temperature Rise Range	30-60	30-60	30-60	30-60	30-60
No. of Burners	3	4	3	4	3
EVAPORATOR MOTOR					
Type	ECM	ECN	ECN	ECN	ECN
Wheel (D x W)	10" x 9"	10" x 9"	11" x 10"	11" x 10"	11" x 10"
Indoor Nominal CFM	1150	1150	1,250	1,250	1,525
No. of Speeds	5	5	5	5	5
Indoor Blower FLA	3.8	3.8	5.4	5.4	5.4
Horsepower	1/2	1/2	3/4	3/4	3/4
EVAPORATOR COIL					
Face Area (ft²)	4.35	4.35	5.68	5.68	5.68
Rows Deep/Fins per Inch	4/14	4/14	4/14	4/14	4/14
Piston Size (Cooling)	0.055	0.055	0.061	0.061	0.065
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	75	75	79	79	89
CONDENSER FAN / COIL					
Outdoor Fan FLA	1.4	1.4	1.4	1.4	2.0
Horsepower	1/4	1/4	1/4	1/4	1/3
Blade Diameter	22"	22"	22"	22"	22"
Outdoor Nominal CFM	2,617	2,617	2,874	2,874	3,005
Face Area (ft²)	11.13	11.13	15.36	15.36	8.81
Rows Deep/Fins per Inch	2/27	2/27	1/24	1/24	2/27
COMPRESSOR					
Type	Scroll	Scroll	Scroll	Scroll	Scroll
Stage	1	1	1	1	1
RLA	13.4	13.4	14.4	14.4	19.4
LRA	83.3	83.3	112	112	128
ELECTRICAL DATA					
Voltage (Frequency 60Hz)	208/230	208/230	208/230	208/230	208/230
Phase	1	1	1	1	1
Min. Circuit Ampacity	22	22	24.8	24.8	31.6
Max. Overcurrent Protection	35	35	35	35	50
OPERATING / SHIP WEIGHTS (LBS)	400 / 410	400 / 410	460 / 470	460 / 470	450 / 460

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.

	GPGM3 4808031	GPGM3 4810031	GPGM3 6008031	GPGM3 6010031	GPGM3 6012031
COOLING CAPACITY					
Total BTU/h	46,000	46,000	56,000	56,000	56,000
Sensible BTU/h	35,696	35,696	41,944	41,944	41,944
SEER2	13.4	13.4	13.4	13.4	13.4
EER2	10.6	10.6	10.6	10.6	10.6
Decibels	79	79	81	81	81
HEATING CAPACITY					
Input BTU/h	80,000	100,000	80,000 / 64,800	100,000 / 81,000	120,000 / 97,200
Output BTU/h	64,800	81,000	60,000 / 48,600	75,000 / 60,750	90,000 / 72,900
AFUE	81	81	81	81	81
Temperature Rise Range	30-60	35-65	30-60	35-65	35-65
No. of Burners	4	5	4	5	6
EVAPORATOR MOTOR					
Type	ECN	ECM	ECM	ECM	ECM
Wheel (D x W)	11" x 10"	11" x 10"	11" x 10"	11" x 10"	11" x 10"
Indoor Nominal CFM	1525	1525	1,700	1,700	1,700
No. of Speeds	5	5	5	5	5
Indoor Blower FLA	5.4	5.4	7.0	7.0	7.0
Horsepower	3/4	3/4	1.0	1.0	1.0
EVAPORATOR COIL					
Face Area (ft ²)	5.68	5.68	5.68	5.68	5.68
Rows Deep/Fins per Inch	4/14	4/14	4/14	4/14	4/14
Piston Size (Cooling)	0.065	0.065	TXV	TXV	TXV
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	89	89	78	78	78
CONDENSER FAN / COIL					
Outdoor Fan FLA	2.0	2.0	2	2	2
Horsepower	1/3	1/3	1/3	1/3	1/3
Blade Diameter	22"	22"	22"	22"	22"
Outdoor Nominal CFM	3,005	3,005	2,975	2,975	2,975
Face Area (ft ²)	8.81	8.81	8.81	8.81	8.81
Rows Deep/Fins per Inch	2/27	2/27	2/27	2/27	2/27
COMPRESSOR					
Type	Scroll	Scroll	Scroll	Scroll	Scroll
Stage	1	1	2	2	2
RLA	19.4	19.4	27.10	27.10	27.10
LRA	128	128	178	178	178
ELECTRICAL DATA					
Voltage (Frequency 60Hz)	208/230	208/230	208/230	208/230	208/230
Phase	1	1	1	1	1
Min. Circuit Ampacity	31.6	31.6	42.8	42.8	42.8
Max. Overcurrent Protection	50	50	60	60	60
OPERATING / SHIP WEIGHTS (LBS)	450 / 460	450 / 460	500 / 510	500 / 510	500 / 510

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.

PRODUCT SPECIFICATIONS

	GPUM3 2404031	GPUM3 3006031	GPUM3 3606031
COOLING CAPACITY			
Total BTU/h	22,800	28,600	33,800
Sensible BTU/h	18,206	22,637	26,347
SEER2	13.4	13.4	13.4
EER2	10.6	10.6	10.6
Decibels	78	76	76
HEATING CAPACITY			
Input BTU/h	40,000	60,000	60,000
Output BTU/h	32,400	48,600	48,600
AFUE	81	81	81
Temperature Rise Range	25-55	30-60	30-60
No. of Burners	2	3	3
EVAPORATOR MOTOR			
Type	ECM	ECM	ECM
Wheel (D x W)	10" x 8"	10" x 8"	10" x 9"
Indoor Nominal CFM	760	1,000	1150
No. of Speeds	5	5	5
Indoor Blower FLA	3.8	3.8	3.8
Horsepower	1/2	1/2	1/2
EVAPORATOR COIL			
Face Area (ft²)	4.35	4.35	4.35
Rows Deep/Fins per Inch	3/14	3/14	4/14
Piston Size (Cooling)	0.047	0.053	0.055
Drain Size (NPT)	¾"	¾"	¾"
Refrigerant Charge (oz.)	59	57	75
CONDENSER FAN / COIL			
Outdoor Fan FLA	0.95	1.4	1.4
Horsepower	1/6	1/4	1/4
Blade Diameter	22"	22"	22"
Outdoor Nominal CFM	2,434	2,793	2,617
Face Area (ft²)	12.3	12.3	11.13
Rows Deep/Fins per Inch	1/24	1/24	2/27
COMPRESSOR			
Type	Scroll	Scroll	Scroll
Stage	1	1	1
RLA	10.2	12.8	13.4
LRA	59.3	76.0	83.3
ELECTRICAL DATA			
Voltage (Frequency 60Hz)	208/230	208/230	208/230
Phase	1	1	1
Min. Circuit Ampacity	17.6	21.2	22
Max. Overcurrent Protection	25	30	35
OPERATING / SHIP WEIGHTS (LBS)	370 / 380	380 / 410	400 / 410

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.

	GPUM3 4208031	GPUM3 4808031	GPUM3 6008031
COOLING CAPACITY			
Total BTU/h	39,000	46,000	56,000
Sensible BTU/h	29,621	35,696	41,944
SEER2	13.4	13.4	13.4
EER2	10.6	10.6	10.6
Decibels	78	79	81
HEATING CAPACITY			
Input BTU/h	80,000	80,000	80,000 / 64,800
Output BTU/h	64,800	64,800	60,000 / 48,600
AFUE	81	81	81
Temperature Rise Range	30-60	30-60	30-60
No. of Burners	4	4	4
EVAPORATOR MOTOR			
Type	ECN	ECN	ECM
Wheel (D x W)	11" x 10"	11" x 10"	11" x 10"
Indoor Nominal CFM	1,250	1525	1,700
No. of Speeds	5	5	5
Indoor Blower FLA	5.4	5.4	7.0
Horsepower	3/4	3/4	1.0
EVAPORATOR COIL			
Face Area (ft²)	5.68	5.68	5.68
Rows Deep/Fins per Inch	4/14	4/14	4/14
Piston Size (Cooling)	0.061	0.065	TXV
Drain Size (NPT)	¾"	¾"	¾"
Refrigerant Charge (oz.)	79	89	78
CONDENSER FAN / COIL			
Outdoor Fan FLA	1.4	2.0	2
Horsepower	1/4	1/3	1/3
Blade Diameter	22"	22"	22"
Outdoor Nominal CFM	2,874	3,005	2,975
Face Area (ft²)	15.36	8.81	8.81
Rows Deep/Fins per Inch	1/24	2/27	2/27
COMPRESSOR			
Type	Scroll	Scroll	Scroll
Stage	1	1	2
RLA	14.4	19.4	27.10
LRA	112	128	178
ELECTRICAL DATA			
Voltage (Frequency 60Hz)	208/230	208/230	208/230
Phase	1	1	1
Min. Circuit Ampacity	24.8	31.6	42.8
Max. Overcurrent Protection	35	50	60
OPERATING / SHIP WEIGHTS (LBS)	460 / 470	450 / 460	500 / 510

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.

		OUTDOOR AMBIENT TEMPERATURE																																						
		65						75						85						95						105						115								
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199			
70	MBh	23.3	23.6	24.3	-	23.1	23.4	24.1	-	22.5	22.8	23.5	-	21.4	21.8	22.5	-	20.2	20.5	21.2	-	19.0	19.3	20.0	-	17.5	17.8	18.5	-	16.0	16.3	16.6	-	14.5	14.8	15.1	-	12.5	12.8	13.1
	S/T	0.66	0.58	0.44	-	0.67	0.59	0.45	-	1.00	0.62	0.47	-	1.00	0.64	0.49	-	1.00	0.66	0.52	-	1.00	0.71	0.57	-	1.00	0.68	0.54	-	1.00	0.74	0.61	-	1.00	0.80	0.67	-	1.00	0.88	0.75
	ΔT	20.16	18.25	14.69	-	20.11	18.20	14.64	-	20.38	18.47	14.91	-	20.09	18.18	14.62	-	19.83	17.93	14.37	-	21.03	19.12	15.56	-	19.83	17.93	14.37	-	21.03	19.12	15.56	-	19.83	17.93	14.37	-	21.03	19.12	15.56
	kW	1.53	1.53	1.52	-	1.72	1.72	1.72	-	1.93	1.93	1.93	-	2.17	2.17	2.16	-	2.43	2.43	2.42	-	2.73	2.73	2.73	-	2.97	2.97	2.96	-	3.21	3.21	3.20	-	3.46	3.46	3.45	-	3.71	3.71	3.70
	Amps	6.17	6.16	6.15	-	7.05	7.04	7.03	-	8.03	8.03	8.01	-	9.10	9.09	9.07	-	10.28	10.28	10.26	-	11.68	11.67	11.66	-	13.16	13.15	13.14	-	14.64	14.63	14.62	-	16.12	16.11	16.10	-	17.60	17.59	17.58
	Hi PR	265	267	268	-	307	308	310	-	351	352	354	-	398	399	401	-	449	450	452	-	503	504	506	-	551	552	553	-	595	596	597	-	637	638	639	-	679	680	681
760	Lo PR	129	130	133	-	136	138	141	-	143	145	148	-	149	150	154	-	155	156	159	-	162	163	166	-	167	168	171	-	173	174	177	-	179	180	183	-	185	186	189
	MBh	23.5	23.8	24.5	-	23.3	23.6	24.3	-	22.7	23.0	23.7	-	21.6	22.0	22.7	-	20.4	20.7	21.4	-	19.2	19.5	20.2	-	17.7	18.0	18.7	-	16.2	16.5	16.8	-	14.3	14.6	14.9	-	11.7	12.0	12.3
	S/T	0.70	0.62	0.48	-	0.71	0.63	0.48	-	1.00	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.70	0.55	-	1.00	0.74	0.61	-	1.00	0.72	0.58	-	1.00	0.78	0.65	-	1.00	0.84	0.71	-	1.00	0.92	0.79
	ΔT	19.46	17.55	13.99	-	19.41	17.50	13.94	-	19.68	17.77	14.21	-	19.39	17.48	13.92	-	19.13	17.23	13.67	-	20.33	18.42	14.86	-	19.13	17.23	13.67	-	20.33	18.42	14.86	-	20.33	18.42	14.86	-	20.33	18.42	14.86
	kW	1.53	1.53	1.53	-	1.73	1.72	1.72	-	1.94	1.94	1.94	-	2.17	2.17	2.17	-	2.43	2.43	2.43	-	2.74	2.74	2.73	-	2.97	2.97	2.96	-	3.21	3.21	3.20	-	3.46	3.46	3.45	-	3.71	3.71	3.70
	Amps	6.20	6.19	6.17	-	7.08	7.07	7.05	-	8.06	8.05	8.04	-	9.12	9.12	9.10	-	10.31	10.31	10.29	-	11.71	11.70	11.68	-	13.19	13.18	13.17	-	14.67	14.66	14.65	-	16.15	16.14	16.13	-	17.63	17.62	17.61
900	Hi PR	267	268	270	-	309	310	312	-	352	353	355	-	399	401	402	-	450	451	453	-	504	506	507	-	552	553	554	-	596	597	598	-	638	639	640	-	680	681	682
	Lo PR	130	131	135	-	138	139	142	-	144	146	149	-	150	152	155	-	156	157	161	-	163	164	168	-	169	170	173	-	175	176	179	-	181	182	185	-	187	188	191
	MBh	24.1	24.4	25.1	-	23.9	24.2	24.9	-	23.3	23.6	24.3	-	22.2	22.5	23.2	-	20.9	21.3	22.0	-	19.8	20.1	20.8	-	17.9	18.2	18.9	-	16.4	16.7	17.0	-	14.5	14.8	15.1	-	11.8	12.1	12.4
	S/T	0.74	0.66	0.52	-	0.75	0.67	0.53	-	1.00	0.70	0.55	-	1.00	0.72	0.58	-	1.00	0.74	0.60	-	1.00	0.78	0.65	-	1.00	0.74	0.60	-	1.00	0.80	0.67	-	1.00	0.84	0.71	-	1.00	0.92	0.79
	ΔT	18.07	16.17	12.61	-	18.02	16.11	12.56	-	18.29	16.38	12.82	-	18.00	16.09	12.54	-	17.75	15.84	12.28	-	18.94	17.03	13.47	-	18.00	16.09	12.54	-	18.94	17.03	13.47	-	18.94	17.03	13.47	-	18.94	17.03	13.47
	kW	1.55	1.54	1.54	-	1.74	1.74	1.73	-	1.95	1.95	1.95	-	2.19	2.18	2.18	-	2.45	2.44	2.44	-	2.75	2.75	2.74	-	2.97	2.97	2.96	-	3.21	3.21	3.20	-	3.46	3.46	3.45	-	3.71	3.71	3.70
75	Amps	6.25	6.24	6.23	-	7.13	7.12	7.11	-	8.11	8.11	8.09	-	9.18	9.17	9.16	-	10.37	10.36	10.35	-	11.76	11.75	11.74	-	13.24	13.23	13.22	-	14.72	14.71	14.70	-	16.20	16.19	16.18	-	17.68	17.67	17.66
	Hi PR	270	271	273	-	312	313	315	-	356	357	359	-	403	404	406	-	453	455	456	-	508	509	511	-	554	555	556	-	598	599	600	-	640	641	642	-	682	683	684
	Lo PR	133	135	138	-	141	142	146	-	148	149	152	-	153	155	158	-	159	161	164	-	166	168	171	-	171	172	175	-	177	178	181	-	183	184	187	-	189	190	193
	MBh	23.3	23.6	24.3	25.4	23.1	23.4	24.1	25.2	22.5	22.8	23.5	24.6	21.7	22.0	22.7	23.7	20.4	20.7	21.4	22.5	19.2	19.6	20.2	21.3	17.5	17.8	18.5	19.6	16.2	16.5	16.8	17.1	17.3	17.6	17.9	18.2	18.5	18.8	
	S/T	0.80	0.72	0.58	0.4	1.00	0.73	0.58	0.4	1.00	0.75	0.61	0.5	1.00	0.77	0.63	0.5	1.00	0.77	0.63	0.5	1.00	0.78	0.64	0.5	1.00	0.78	0.64	0.5	1.00	0.80	0.67	0.5	1.00	0.84	0.71	0.6	1.00	0.92	0.79
	ΔT	24.35	22.44	18.89	15.2	24.30	22.39	18.83	15.1	24.57	22.66	19.10	15.4	24.28	22.37	18.81	15.1	24.02	22.12	18.56	14.9	25.22	23.31	19.75	16.1	24.02	22.12	18.56	14.9	25.22	23.31	19.75	16.1	25.48	23.57	20.01	16.4	25.74	23.83	20.27

		OUTDOOR AMBIENT TEMPERATURE												105												115											
		65						75						85						95						105						115					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	700	MBh	23.4	23.8	24.5	25.5	23.2	23.6	24.2	25.3	22.6	23.0	23.6	24.7	21.6	21.9	22.6	23.7	20.3	20.6	21.3	22.4	19.1	19.5	20.2	21.2	19.1	19.5	20.2	21.2							
		S/T	1.00	0.85	0.71	0.6	1.00	0.86	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.79	0.6	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.7							
		ΔT	28.57	26.66	23.10	19.4	28.52	26.61	23.05	19.4	28.79	26.88	23.32	19.6	28.50	26.59	23.03	19.3	28.24	26.34	22.78	19.1	29.44	27.53	23.97	20.3	29.44	27.53	23.97	20.3							
		kW	1.53	1.53	1.52	1.5	1.72	1.72	1.72	1.7	1.93	1.93	1.93	1.9	2.17	2.17	2.16	2.2	2.43	2.43	2.42	2.4	2.73	2.73	2.73	2.7	2.73	2.73	2.73	2.7							
		Amps	6.17	6.16	6.15	6.2	7.05	7.04	7.03	7.1	8.03	8.02	8.01	8.1	9.09	9.09	9.07	9.1	10.28	10.28	10.26	10.3	11.68	11.67	11.66	11.7	11.68	11.67	11.66	11.7							
		Hi PR	266	267	269	273.8	308	309	311	315.5	352	353	355	359.3	399	400	402	406.4	450	451	453	457.1	504	505	507	511.3	504	505	507	511.3							
	Lo PR	129	131	134	139.4	137	139	142	147.2	144	145	149	154.0	150	151	154	159.8	155	157	160	165.4	162	164	167	172.5	162	164	167	172.5								
80	760	MBh	23.6	24.0	24.7	25.7	23.4	23.8	24.4	25.5	22.8	23.1	23.8	24.9	21.8	22.1	22.8	23.9	20.5	20.8	21.5	22.6	19.3	19.7	20.4	21.4	19.3	19.7	20.4	21.4							
		S/T	1.00	0.89	0.75	0.6	1.00	0.89	0.75	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.6	1.00	1.00	0.82	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.7							
		ΔT	27.87	25.96	22.40	18.7	27.82	25.91	22.35	18.7	28.09	26.18	22.62	18.9	27.80	25.89	22.33	18.6	27.54	25.64	22.08	18.4	28.74	26.83	23.27	19.6	28.74	26.83	23.27	19.6							
		kW	1.53	1.53	1.53	1.5	1.73	1.72	1.72	1.7	1.94	1.94	1.94	2.0	2.17	2.17	2.17	2.2	2.43	2.43	2.43	2.4	2.74	2.74	2.73	2.7	2.74	2.74	2.73	2.7							
		Amps	6.20	6.19	6.17	6.2	7.08	7.07	7.05	7.1	8.06	8.05	8.04	8.1	9.12	9.12	9.10	9.2	10.31	10.30	10.29	10.4	11.71	11.70	11.68	11.8	11.71	11.70	11.68	11.8							
		Hi PR	268	269	271	275.2	309	310	312	316.9	353	354	356	360.7	400	401	403	407.8	451	452	454	458.5	505	506	508	512.7	505	506	508	512.7							
	Lo PR	130	132	135	140.6	138	140	143	148.4	145	147	150	155.2	151	152	156	161.0	156	158	161	166.7	163	165	168	173.7	163	165	168	173.7								
900	900	MBh	24.2	24.5	25.2	26.3	24.0	24.3	25.0	26.1	23.4	23.7	24.4	25.5	22.3	22.7	23.4	24.4	21.1	21.4	22.1	23.1	19.9	20.2	20.9	22.0	19.9	20.2	20.9	22.0							
		S/T	1.00	0.93	0.79	0.6	1.00	0.94	0.80	0.6	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8							
		ΔT	26.48	24.58	21.02	17.3	26.43	24.52	20.97	17.3	26.70	24.79	21.23	17.5	26.41	24.50	20.95	17.3	26.16	24.25	20.69	17.0	27.35	25.44	21.88	18.2	27.35	25.44	21.88	18.2							
		kW	1.55	1.54	1.54	1.6	1.74	1.74	1.73	1.7	1.95	1.95	1.95	2.0	2.19	2.18	2.18	2.2	2.44	2.44	2.44	2.5	2.75	2.75	2.74	2.8	2.75	2.75	2.74	2.8							
		Amps	6.25	6.24	6.23	6.3	7.13	7.12	7.11	7.2	8.11	8.11	8.09	8.2	9.18	9.17	9.16	9.2	10.37	10.36	10.34	10.4	11.76	11.75	11.74	11.8	11.76	11.75	11.74	11.8							
		Hi PR	271	272	274	278.4	313	314	316	320.1	356	357	359	363.9	403	405	406	411.0	454	455	457	461.8	508	509	511	516.0	508	509	511	516.0							
	Lo PR	134	135	138	143.8	141	143	146	151.6	148	150	153	158.4	154	155	159	164.2	160	161	164	169.8	167	168	171	176.9	167	168	171	176.9								

		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	29.1	29.5	30.4	-	28.8	29.2	30.1	-	28.1	28.5	29.4	-	26.8	27.2	28.0	-	25.2	25.6	26.5	-	23.7	24.1	25.0	-	23.7	24.1	25.0	-	23.7	24.1	25.0	-				
	S/T	0.63	0.55	0.41	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.61	0.46	-	1.00	0.63	0.49	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-				
	ΔT	19.59	17.78	14.40	-	19.54	17.73	14.35	-	19.80	17.99	14.60	-	19.53	17.71	14.33	-	19.28	17.47	14.09	-	20.42	18.61	15.22	-	20.42	18.61	15.22	-	20.42	18.61	15.22	-				
	kW	1.96	1.95	1.95	-	2.18	2.18	2.18	-	2.44	2.44	2.43	-	2.71	2.71	2.71	-	3.02	3.02	3.01	-	3.38	3.38	3.37	-	3.38	3.38	3.37	-	3.38	3.38	3.37	-				
	Amps	7.75	7.74	7.72	-	8.79	8.78	8.76	-	9.95	9.94	9.92	-	11.21	11.20	11.18	-	12.61	12.61	12.59	-	14.26	14.25	14.24	-	14.26	14.25	14.24	-	14.26	14.25	14.24	-				
	Hi PR	259	260	262	-	300	301	303	-	343	344	346	-	389	390	392	-	439	440	442	-	492	493	495	-	492	493	495	-	492	493	495	-				
	Lo PR	126	128	131	-	134	135	139	-	141	142	145	-	146	148	151	-	152	153	157	-	159	160	164	-	159	160	164	-	159	160	164	-				
1000	MBh	29.5	29.9	30.8	-	29.2	29.6	30.5	-	28.5	28.9	29.7	-	27.2	27.6	28.4	-	25.6	26.0	26.8	-	24.1	24.5	25.4	-	24.1	24.5	25.4	-	24.1	24.5	25.4	-				
	S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-				
	ΔT	18.50	16.69	13.30	-	18.45	16.64	13.25	-	18.70	16.89	13.51	-	18.43	16.62	13.24	-	18.19	16.38	12.99	-	19.32	17.51	14.13	-	19.32	17.51	14.13	-	19.32	17.51	14.13	-				
	kW	1.97	1.97	1.96	-	2.20	2.19	2.19	-	2.45	2.45	2.44	-	2.72	2.72	2.72	-	3.03	3.03	3.03	-	3.39	3.39	3.39	-	3.39	3.39	3.39	-	3.39	3.39	3.39	-				
	Amps	7.80	7.79	7.77	-	8.84	8.83	8.81	-	10.00	10.00	9.98	-	11.26	11.25	11.24	-	12.67	12.66	12.64	-	14.32	14.31	14.29	-	14.32	14.31	14.29	-	14.32	14.31	14.29	-				
	Hi PR	261	262	264	-	302	303	305	-	345	346	348	-	391	392	394	-	441	442	444	-	494	495	497	-	494	495	497	-	494	495	497	-				
	Lo PR	128	130	133	-	136	137	141	-	142	144	147	-	148	150	153	-	154	155	159	-	161	162	166	-	161	162	166	-	161	162	166	-				
1125	MBh	29.9	30.3	31.2	-	29.7	30.1	31.0	-	28.9	29.3	30.2	-	27.6	28.0	28.9	-	26.0	26.4	27.3	-	24.6	25.0	25.8	-	24.6	25.0	25.8	-	24.6	25.0	25.8	-				
	S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.73	0.58	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-				
	ΔT	17.58	15.76	12.38	-	17.53	15.72	12.33	-	17.78	15.97	12.59	-	17.51	15.70	12.31	-	17.27	15.45	12.07	-	18.40	16.59	13.21	-	18.40	16.59	13.21	-	18.40	16.59	13.21	-				
	kW	1.98	1.98	1.97	-	2.21	2.20	2.20	-	2.46	2.46	2.45	-	2.73	2.73	2.73	-	3.04	3.04	3.04	-	3.40	3.40	3.40	-	3.40	3.40	3.40	-	3.40	3.40	3.40	-				
	Amps	7.84	7.84	7.82	-	8.89	8.88	8.86	-	10.05	10.04	10.02	-	11.31	11.30	11.28	-	12.71	12.70	12.69	-	14.36	14.35	14.34	-	14.36	14.35	14.34	-	14.36	14.35	14.34	-				
	Hi PR	263	265	266	-	304	305	307	-	347	348	350	-	393	394	396	-	443	444	446	-	496	497	499	-	496	497	499	-	496	497	499	-				
	Lo PR	130	132	135	-	138	139	143	-	145	146	149	-	150	152	155	-	156	157	161	-	163	164	168	-	163	164	168	-	163	164	168	-				

875	MBh	29.1	29.5	30.4	31.7	28.9	29.3	30.1	31.5	28.1	28.5	29.4	30.7	26.8	27.2	28.1	29.4	25.2	25.6	26.5	27.8	23.7	24.1	25.0	26.3
	S/T	0.77	0.69	0.55	0.4	1.00	0.69	0.55	0.4	1.00	0.72	0.58	0.4	1.00	0.74	0.60	0.4	1.00	0.76	0.62	0.5	1.00	1.00	0.68	0.5
	ΔT	23.58	21.77	18.38	14.9	23.53	21.72	18.33	14.8	23.78	21.97	18.59	15.1	23.51	21.70	18.31	14.8	23.27	21.46	18.07	14.6	24.40	22.59	19.21	15.7
	kW	1.95	1.95	1.95	2.0	2.18	2.18	2.18	2.2	2.44	2.43	2.43	2.4	2.71	2.71	2.71	2.7	3.02	3.02	3.01	3.0	3.38	3.38	3.37	3.4
	Amps	7.74	7.73	7.71	7.8	8.78	8.77	8.75	8.8	9.94	9.93	9.92	10.0	11.20	11.19	11.18	11.3	12.61	12.60	12.58	12.7	14.26	14.25	14.23	14.3
	Hi PR	259	260	262	266.8	300	301	303	307.7	343	344	346	350.5	389	390	392	396.6	439	440	442	446.3	492	493	495	499.4
	Lo PR	126	128	131	136.4	134	135	139	144.1	141	142	145	150.8	146	148	151	156.5	152	153	157	162.1	159	160	164	169.1
75	MBh	29.5	29.9	30.8	32.1	29.2	29.6	30.5	31.8	28.5	28.9	29.8	31.1	27.2	27.6	28.4	29.8	25.6	26.0	26.9	28.2	24.1	24.5	25.4	26.7
	S/T	0.83	0.75	0.61	0.5	1.00	0.76	0.61	0.5	1.00	0.78	0.64	0.5	1.00	0.80	0.66	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.74	0.6
	ΔT	22.48	20.67	17.29	13.8	22.43	20.62	17.24	13.7	22.69	20.88	17.49	14.0	22.41	20.60	17.22	13.7	22.17	20.36	16.98	13.5	23.31	21.49	18.11	14.6
	kW	1.97	1.96	1.96	2.0	2.19	2.19	2.19	2.2	2.45	2.45	2.44	2.5	2.72	2.72	2.72	2.7	3.03	3.03	3.02	3.0	3.39	3.39	3.38	3.4
	Amps	7.79	7.78	7.77	7.8	8.83	8.83	8.81	8.9	10.00	9.99	9.97	10.1	11.26	11.25	11.23	11.3	12.66	12.65	12.63	12.7	14.31	14.30	14.28	14.4
	Hi PR	262	263	264	269.0	302	304	305	309.9	345	346	348	352.7	391	392	394	398.8	441	442	444	448.5	494	495	497	501.6
	Lo PR	128	130	133	138.3	136	137	141	145.9	143	144	147	152.7	148	150	153	158.3	154	155	159	163.9	161	162	166	170.9
1125	MBh	30.0	30.4	31.2	32.6	29.7	30.1	31.0	32.3	28.9	29.3	30.2	31.5	27.6	28.0	28.9	30.2	26.0	26.4	27.3	28.6	24.6	25.0	25.9	27.2
	S/T	0.86	0.78	0.64	0.5	1.00	0.79	0.65	0.5	1.00	0.82	0.68	0.5	1.00	0.84	0.70	0.5	1.00	1.00	0.72	0.6	1.00	1.00	0.77	0.6
	ΔT	21.56	19.75	16.37	12.9	21.51	19.70	16.32	12.8	21.77	19.95	16.57	13.1	21.49	19.68	16.30	12.8	21.25	19.44	16.06	12.6	22.39	20.57	17.19	13.7
	kW	1.98	1.97	1.97	2.0	2.20	2.20	2.20	2.2	2.46	2.46	2.45	2.5	2.73	2.73	2.73	2.7	3.04	3.04	3.03	3.1	3.40	3.40	3.39	3.4
	Amps	7.84	7.83	7.81	7.9	8.88	8.87	8.85	8.9	10.04	10.03	10.02	10.1	11.30	11.29	11.27	11.4	12.71	12.70	12.68	12.8	14.36	14.35	14.33	14.4
	Hi PR	264	265	267	271.1	305	306	307	312.0	347	348	350	354.8	393	395	396	401.0	443	444	446	450.7	496	497	499	503.7
	Lo PR	130	132	135	140.3	138	139	143	148.0	145	146	149	154.7	150	152	155	160.4	156	157	161	166.0	163	164	168	173.0

IDB			Airflow			Outdoor Ambient Temperature																								105												115					
						65						75						85						Entering Indoor Wet Bulb Temperature																							
						59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71														
80	875	MBh	29.3	29.7	30.5	31.9	29.0	29.4	30.3	31.6	28.2	28.7	29.5	30.9	26.9	27.3	28.2	29.5	25.3	25.8	26.6	27.9	23.9	24.3	25.2	26.5	23.9	24.3	25.2	26.5																	
		S/T	1.00	0.82	0.68	0.5	1.00	0.82	0.68	0.5	1.00	0.85	0.71	0.6	1.00	1.00	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.81	0.7																	
		ΔT	27.59	25.78	22.39	18.9	27.54	25.73	22.34	18.8	27.79	25.98	22.60	19.1	27.52	25.71	22.33	18.8	27.28	25.47	22.08	18.6	28.41	26.60	23.22	19.7	28.41	26.60	23.22	19.7																	
		kW	1.96	1.95	1.95	2.0	2.18	2.18	2.18	2.2	2.44	2.44	2.43	2.4	2.71	2.71	2.71	2.7	3.02	3.02	3.01	3.0	3.38	3.38	3.37	3.4	3.38	3.38	3.37	3.4																	
		Amps	7.74	7.74	7.72	7.8	8.79	8.78	8.76	8.8	9.95	9.94	9.92	10.0	11.21	11.20	11.18	11.3	12.61	12.60	12.59	12.7	14.26	14.25	14.24	14.3	14.26	14.25	14.24	14.3																	
		Hi PR	260	261	263	267.3	301	302	304	308.1	344	345	346	351.0	390	391	393	397.1	439	440	442	446.8	492	494	495	499.9	492	494	495	499.9																	
		Lo PR	127	128	132	137.0	134	136	139	144.6	141	143	146	151.4	147	148	152	157.0	152	154	157	162.6	159	161	164	169.6	159	161	164	169.6																	
1000		MBh	29.6	30.1	30.9	32.3	29.4	29.8	30.7	32.0	28.6	29.0	29.9	31.2	27.3	27.7	28.6	29.9	25.7	26.1	27.0	28.3	24.3	24.7	25.5	26.9	24.3	24.7	25.5	26.9																	
		S/T	1.00	0.88	0.74	0.6	1.00	0.89	0.75	0.6	1.00	0.91	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7																	
		ΔT	26.49	24.68	21.30	17.8	26.44	24.63	21.25	17.7	26.70	24.89	21.50	18.0	26.43	24.61	21.23	17.7	26.18	24.37	20.99	17.5	27.32	25.51	22.12	18.6	27.32	25.51	22.12	18.6																	
		kW	1.97	1.97	1.96	2.0	2.20	2.19	2.19	2.2	2.45	2.45	2.44	2.5	2.72	2.72	2.72	2.7	3.03	3.03	3.03	3.0	3.39	3.39	3.39	3.4	3.39	3.39	3.39	3.4																	
		Amps	7.80	7.79	7.77	7.9	8.84	8.83	8.81	8.9	10.00	9.99	9.98	10.1	11.26	11.25	11.23	11.3	12.67	12.66	12.64	12.7	14.32	14.31	14.29	14.4	14.32	14.31	14.29	14.4																	
		Hi PR	262	263	265	269.5	303	304	306	310.3	346	347	349	353.2	392	393	395	399.3	442	443	445	449.0	495	496	498	502.1	495	496	498	502.1																	
		Lo PR	129	130	133	138.8	136	138	141	146.5	143	145	148	153.2	149	150	154	158.9	154	156	159	164.5	161	163	166	171.5	161	163	166	171.5																	
1125		MBh	30.1	30.5	31.4	32.7	29.8	30.3	31.1	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3																	
		S/T	1.00	0.92	0.77	0.6	1.00	0.92	0.78	0.6	1.00	0.90	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.8	1.00	1.00	0.87	0.8																	
		ΔT	25.57	23.76	20.38	16.9	25.52	23.71	20.33	16.8	25.78	23.97	20.58	17.1	25.50	23.69	20.31	16.8	25.26	23.45	20.07	16.6	26.40	24.58	21.20	17.7	26.40	24.58	21.20	17.7																	
		kW	1.98	1.98	1.97	2.0	2.21	2.20	2.20	2.2	2.46	2.46	2.45	2.5	2.73	2.73	2.73	2.7	3.04	3.04	3.04	3.1	3.40	3.40	3.40	3.4	3.40	3.40	3.40	3.4																	
		Amps	7.84	7.84	7.82	7.9	8.88	8.88	8.86	8.9	10.05	10.04	10.02	10.1	11.31	11.30	11.28	11.4	12.71	12.70	12.69	12.8	14.36	14.35	14.33	14.4	14.36	14.35	14.33	14.4																	
		Hi PR	264	265	267	271.6	305	306	308	312.5	348	349	351	355.3	394	395	397	401.4	444	445	447	451.2	497	498	500	504.2	497	498	500	504.2																	
		Lo PR	131	132	135	140.9	138	140	143	148.5	145	147	150	155.3	151	152	156	161.0	156	158	161	166.5	163	165	168	173.5	163	165	168	173.5																	

		85																				1000																				1125																				kW = Total system power Amps: Unit amps (comp.+ evaporator + condenser fan motors)	
		875				900				950				1000				1050				1100				1150				1200				1250																													
IDB: Entering Indoor Dry Bulb Temperature High and low pressures are measured at the liquid and suction access fittings.		MBh	29.8	30.2	31.0	32.4	29.5	29.9	30.8	32.1	28.7	29.1	30.0	31.3	27.4	27.8	28.7	30.0	25.8	26.2	27.1	28.4	24.4	24.8	25.7	27.0	24.4	24.8	25.7	27.0	24.4	24.8	25.7	27.0																													
		S/T	1.00	0.92	0.78	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.8	1.00	1.00	0.87	0.8	1.00	1.00	0.87	0.8																													
		ΔT	31.15	29.33	25.95	22.4	31.10	29.28	25.90	22.4	31.35	29.54	26.16	22.7	31.08	29.27	25.88	22.4	30.84	29.02	25.64	22.1	31.97	30.16	26.78	23.3	31.97	30.16	26.78	23.3	31.97	30.16	26.78	23.3																													
		kW	1.96	1.96	1.95	2.0	2.19	2.19	2.18	2.2	2.44	2.44	2.44	2.5	2.72	2.72	2.71	2.7	3.02	3.02	3.02	3.0	3.38	3.38	3.38	3.4	3.38	3.38	3.38	3.4	3.38	3.38	3.38	3.4																													
		Amps	7.76	7.76	7.74	7.8	8.81	8.80	8.78	8.9	9.97	9.96	9.94	10.0	11.23	11.22	11.20	11.3	12.63	12.62	12.61	12.7	14.28	14.27	14.26	14.3	14.28	14.27	14.26	14.3	14.28	14.27	14.26	14.3																													
		Hi PR	261	262	264	268.5	302	303	305	309.4	345	346	348	352.2	391	392	394	398.3	441	442	444	448.0	494	495	497	501.1	494	495	497	501.1	494	495	497	501.1																													
Lo PR	129	130	133	138.8	136	138	141	146.5	143	145	148	153.3	149	150	154	158.9	154	156	159	164.5	161	163	166	171.5	161	163	166	171.5	161	163	166	171.5																															
85		MBh	30.1	30.5	31.4	32.7	29.9	30.3	31.2	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.8	25.2	26.0	27.4	24.8	25.2	26.0	27.4	24.8	25.2	26.0	27.4																													
		S/T	1.00	0.99	0.84	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.90	0.7	1.00	1.00	0.90	0.8	1.00	1.00	0.90	0.8	1.00	1.00	0.90	0.8	1.00	1.00	0.90	0.8																													
		ΔT	30.05	28.24	24.86	21.4	30.00	28.19	24.81	21.3	30.26	28.44	25.06	21.6	29.98	28.17	24.79	21.3	29.74	27.93	24.55	21.0	30.88	29.06	25.68	22.2	30.88	29.06	25.68	22.2	30.88	29.06	25.68	22.2																													
		kW	1.97	1.97	1.97	2.0	2.20	2.20	2.19	2.2	2.45	2.45	2.45	2.5	2.73	2.73	2.72	2.7	3.04	3.03	3.03	3.0	3.40	3.39	3.39	3.4	3.40	3.39	3.39	3.4	3.40	3.39	3.39	3.4																													
		Amps	7.82	7.81	7.79	7.9	8.86	8.85	8.83	8.9	10.02	10.01	10.00	10.1	11.28	11.27	11.25	11.3	12.69	12.68	12.66	12.7	14.34	14.33	14.31	14.4	14.34	14.33	14.31	14.4	14.34	14.33	14.31	14.4																													
		Hi PR	263	264	266	270.7	304	305	307	311.6	347	348	350	354.4	393	394	396	400.5	443	444	446	450.2	496	497	499	503.3	496	497	499	503.3	496	497	499	503.3																													
Lo PR	131	132	135	140.7	138	140	143	148.4	145	147	150	155.1	151	152	155	160.8	156	158	161	166.4	163	165	168	173.4	163	165	168	173.4	163	165	168	173.4																															
1125		MBh	30.6	31.0	31.9	33.2	30.3	30.7	31.6	32.9	29.6	30.0	30.9	32.2	28.3	28.7	29.5	30.9	26.7	27.1	28.0	29.3	25.2	25.6	26.5	27.8	25.2	25.6	26.5	27.8	25.2	25.6	26.5	27.8																													
		S/T	1.00	1.00	0.88	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.91	0.8	1.00	1.00	0.93	0.8	1.00	1.00	0.93	0.8	1.00	1.00	0.93	0.8	1.00	1.00	0.93	0.8	1.00	1.00	0.93	0.8																													
		ΔT	29.13	27.32	23.93	20.4	29.08	27.27	23.88	20.4	29.33	27.52	24.14	20.6	29.06	27.25	23.87	20.4	28.82	27.01	23.62	20.1	29.95	28.14	24.76	21.3	29.95	28.14	24.76	21.3	29.95	28.14	24.76	21.3																													
		kW	1.98	1.98	1.98	2.0	2.21	2.21	2.20	2.2	2.46	2.46	2.46	2.5	2.74	2.74	2.73	2.8	3.05	3.04	3.04	3.1	3.41	3.40	3.40	3.4	3.41	3.40	3.40	3.4	3.41	3.40	3.40	3.4																													
		Amps	7.86	7.86	7.84	7.9	8.90	8.90	8.88	9.0	10.07	10.06	10.04	10.1	11.33	11.32	11.30	11.4	12.73	12.72	12.71	12.8	14.38	14.37	14.35	14.4	14.38	14.37	14.35	14.4	14.38	14.37	14.35	14.4																													
		Hi PR	265	266	268	272.8	306	307	309	313.7	349	350	352	356.5	395	396	398	402.6	445	446	448	452.4	498	499	501	505.4	498	499	501	505.4	498	499	501	505.4																													
Lo PR	133	134	137	142.8	140	142	145	150.4	147	149	152	157.2	153	154	157	162.9	158	160	163	168.4	165	167	170	175.4	165	167	170	175.4	165	167	170	175.4																															
		Shaded area reflects AHRI (TVA) conditions.																				Amps: Unit amps (comp.+ evaporator + condenser fan motors)																																									

		65						75						85						95						105						115					
		Outdoor Ambient Temperature																																			
		Entering Indoor Wet Bulb Temperature																																			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	34.5	35.0	36.0	-	34.2	34.7	35.7	-	33.3	33.8	34.8	-	31.8	32.3	33.3	-	29.9	30.4	31.4	-	28.2	28.6	29.7	-	28.2	28.6	29.7	-	28.2	28.6	29.7	-				
	S/T	0.64	0.57	0.43	-	0.65	0.57	0.43	-	0.68	0.60	0.46	-	1.00	0.62	0.48	-	1.00	0.64	0.50	-	1.00	0.69	0.55	-	1.00	0.69	0.55	-	1.00	0.69	0.55	-				
	ΔT	19.69	17.84	14.37	-	19.64	17.79	14.32	-	19.90	18.05	14.58	-	19.62	17.77	14.30	-	19.37	17.52	14.06	-	20.54	18.68	15.22	-	20.54	18.68	15.22	-	20.54	18.68	15.22	-				
	kW	2.31	2.31	2.31	-	2.58	2.58	2.58	-	2.88	2.88	2.88	-	3.21	3.21	3.20	-	3.58	3.57	3.57	-	4.00	4.00	4.00	-	4.00	4.00	4.00	-	4.00	4.00	4.00	-				
	Amps	8.90	8.89	8.87	-	10.14	10.13	10.11	-	11.52	11.51	11.49	-	13.01	13.00	12.98	-	14.68	14.67	14.65	-	16.64	16.63	16.61	-	16.64	16.63	16.61	-	16.64	16.63	16.61	-				
	Hi PR	257	258	260	-	298	299	301	-	340	341	343	-	386	387	389	-	435	436	438	-	488	489	491	-	488	489	491	-	488	489	491	-				
	Lo PR	124	125	128	-	131	133	136	-	138	139	143	-	143	145	148	-	149	150	154	-	156	157	160	-	156	157	160	-	156	157	160	-				
1150	MBh	34.8	35.3	36.4	-	34.5	35.0	36.0	-	33.6	34.1	35.1	-	32.1	32.6	33.6	-	30.2	30.7	31.7	-	28.5	29.0	30.0	-	28.5	29.0	30.0	-	28.5	29.0	30.0	-				
	S/T	0.68	0.61	0.47	-	0.69	0.61	0.47	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.73	0.59	-	1.00	0.73	0.59	-	1.00	0.73	0.59	-				
	ΔT	18.94	17.08	13.62	-	18.89	17.03	13.57	-	19.15	17.29	13.83	-	18.87	17.01	13.55	-	18.62	16.76	13.30	-	19.78	17.93	14.46	-	19.78	17.93	14.46	-	19.78	17.93	14.46	-				
	kW	2.32	2.32	2.31	-	2.59	2.59	2.58	-	2.89	2.89	2.89	-	3.22	3.22	3.21	-	3.59	3.58	3.58	-	4.01	4.01	4.01	-	4.01	4.01	4.01	-	4.01	4.01	4.01	-				
	Amps	8.94	8.93	8.91	-	10.18	10.17	10.15	-	11.56	11.55	11.53	-	13.06	13.05	13.03	-	14.73	14.72	14.70	-	16.69	16.68	16.66	-	16.69	16.68	16.66	-	16.69	16.68	16.66	-				
	Hi PR	259	260	262	-	299	300	302	-	342	343	345	-	387	389	390	-	437	438	440	-	489	490	492	-	489	490	492	-	489	490	492	-				
	Lo PR	125	127	130	-	133	134	137	-	139	141	144	-	145	146	149	-	150	152	155	-	157	158	162	-	157	158	162	-	157	158	162	-				
1350	MBh	35.6	36.1	37.1	-	35.3	35.8	36.8	-	34.4	34.9	35.9	-	32.9	33.4	34.4	-	31.0	31.5	32.5	-	29.3	29.7	30.8	-	29.3	29.7	30.8	-	29.3	29.7	30.8	-				
	S/T	0.73	0.65	0.51	-	0.73	0.65	0.51	-	0.76	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.72	0.58	-	1.00	0.78	0.64	-	1.00	0.78	0.64	-	1.00	0.78	0.64	-				
	ΔT	17.66	15.80	12.34	-	17.61	15.75	12.29	-	17.87	16.01	12.55	-	17.59	15.73	12.27	-	17.34	15.48	12.02	-	18.50	16.64	13.18	-	18.50	16.64	13.18	-	18.50	16.64	13.18	-				
	kW	2.34	2.34	2.33	-	2.61	2.61	2.60	-	2.91	2.91	2.90	-	3.24	3.23	3.23	-	3.60	3.60	3.59	-	4.03	4.03	4.02	-	4.03	4.03	4.02	-	4.03	4.03	4.02	-				
	Amps	9.02	9.01	8.98	-	10.25	10.24	10.22	-	11.63	11.62	11.60	-	13.13	13.12	13.10	-	14.80	14.79	14.77	-	16.76	16.75	16.73	-	16.76	16.75	16.73	-	16.76	16.75	16.73	-				
	Hi PR	262	263	265	-	302	303	305	-	345	346	348	-	390	392	393	-	440	441	443	-	492	493	495	-	492	493	495	-	492	493	495	-				
	Lo PR	128	129	133	-	135	137	140	-	142	144	147	-	148	149	152	-	153	155	158	-	160	161	164	-	160	161	164	-	160	161	164	-				

75	1050	MBh	34.5	35.0	36.0	37.6	34.2	34.7	35.7	37.3	33.3	33.8	34.8	36.4	31.8	32.3	33.3	34.9	29.9	30.4	31.4	33.0	28.2	28.7	29.7	31.3
		S/T	0.78	0.70	0.56	0.4	0.78	0.70	0.57	0.4	1.00	0.73	0.59	0.4	1.00	0.75	0.61	0.5	1.00	0.77	0.63	0.5	1.00	1.00	0.69	0.5
		ΔT	23.77	21.91	18.45	14.9	23.72	21.86	18.40	14.8	23.98	22.12	18.66	15.1	23.70	21.85	18.38	14.8	23.45	21.60	18.13	14.5	24.61	22.76	19.30	15.7
		kW	2.31	2.31	2.30	2.3	2.58	2.58	2.57	2.6	2.88	2.88	2.88	2.9	3.21	3.21	3.20	3.2	3.57	3.57	3.57	3.6	4.00	4.00	4.00	4.0
		Amps	8.89	8.88	8.86	9.0	10.13	10.12	10.10	10.2	11.51	11.50	11.48	11.6	13.01	13.00	12.97	13.1	14.68	14.67	14.64	14.7	16.64	16.63	16.60	16.7
		Hi PR	258	259	260	265.0	298	299	301	305.5	341	342	343	347.9	386	387	389	393.6	435	437	438	442.8	488	489	491	495.4
		Lo PR	124	125	128	133.7	131	133	136	141.2	138	139	143	147.8	143	145	148	153.3	149	150	154	158.8	156	157	160	165.6
75	1150	MBh	34.9	35.3	36.4	37.9	34.6	35.0	36.1	37.6	33.7	34.1	35.2	36.7	32.1	32.6	33.6	35.2	30.2	30.7	31.7	33.3	28.5	29.0	30.0	31.6
		S/T	0.82	0.74	0.60	0.5	0.82	0.74	0.61	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	0.81	0.67	0.5	1.00	1.00	0.73	0.6
		ΔT	23.01	21.16	17.70	14.1	22.96	21.11	17.65	14.1	23.22	21.37	17.91	14.3	22.94	21.09	17.63	14.0	22.70	20.84	17.38	13.8	23.86	22.00	18.54	15.0
		kW	2.32	2.32	2.31	2.3	2.59	2.59	2.58	2.6	2.89	2.89	2.88	2.9	3.22	3.22	3.21	3.2	3.58	3.58	3.58	3.6	4.01	4.01	4.00	4.0
		Amps	8.93	8.92	8.90	9.0	10.17	10.16	10.14	10.2	11.55	11.54	11.52	11.6	13.05	13.04	13.02	13.1	14.72	14.71	14.69	14.8	16.68	16.67	16.65	16.7
		Hi PR	259	260	262	266.5	300	301	302	307.0	342	343	345	349.4	388	389	391	395.1	437	438	440	444.3	490	491	492	496.9
		Lo PR	125	127	130	135.0	133	134	137	142.5	139	141	144	149.1	145	146	149	154.6	150	152	155	160.1	157	158	162	166.9
1350	1350	MBh	35.6	36.1	37.2	38.7	35.3	35.8	36.8	38.4	34.4	34.9	36.0	37.5	32.9	33.4	34.4	36.0	31.0	31.5	32.5	34.1	29.3	29.8	30.8	32.4
		S/T	0.86	0.78	0.64	0.5	1.00	0.79	0.65	0.5	1.00	0.81	0.67	0.5	1.00	0.83	0.69	0.5	1.00	0.85	0.72	0.6	1.00	1.00	0.77	0.6
		ΔT	21.73	19.88	16.42	12.8	21.68	19.83	16.37	12.8	21.94	20.09	16.63	13.0	21.66	19.81	16.35	12.8	21.42	19.56	16.10	12.5	22.58	20.72	17.26	13.7
		kW	2.34	2.33	2.33	2.3	2.61	2.60	2.60	2.6	2.91	2.91	2.90	2.9	3.23	3.23	3.23	3.2	3.60	3.60	3.59	3.6	4.03	4.03	4.02	4.0
		Amps	9.01	9.00	8.98	9.1	10.25	10.24	10.21	10.3	11.63	11.62	11.60	11.7	13.12	13.11	13.09	13.2	14.79	14.78	14.76	14.9	16.75	16.74	16.72	16.8
		Hi PR	262	263	265	269.4	303	304	305	309.9	345	346	348	352.4	391	392	394	398.0	440	441	443	447.3	492	494	495	499.9
		Lo PR	128	129	133	137.9	135	137	140	145.4	142	144	147	151.9	148	149	152	157.5	153	155	158	162.9	160	161	164	169.7

		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
		Entering Indoor Wet Bulb Temperature																																			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1050	MBh	34.7	35.2	36.2	37.8	34.4	34.9	35.9	37.5	33.5	34.0	35.0	36.6	32.0	32.4	33.5	35.0	30.1	30.6	31.6	33.2	28.4	28.8	29.9	31.4											
		S/T	1.00	0.83	0.69	0.5	1.00	0.83	0.69	0.5	1.00	0.86	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.82	0.7											
		ΔT	27.88	26.02	22.56	19.0	27.83	25.97	22.51	18.9	28.09	26.23	22.77	19.2	27.81	25.95	22.49	18.9	27.56	25.70	22.24	18.7	28.72	26.86	23.40	19.8											
		kW	2.31	2.31	2.30	2.3	2.58	2.58	2.58	2.6	2.88	2.88	2.88	2.9	3.21	3.21	3.20	3.2	3.58	3.57	3.57	3.6	4.00	4.00	4.00	4.0											
		Amps	8.90	8.89	8.87	9.0	10.14	10.13	10.10	10.2	11.52	11.51	11.49	11.6	13.01	13.00	12.98	13.1	14.68	14.67	14.65	14.7	16.64	16.63	16.61	16.7											
	Hi PR	258	259	261	265.4	299	300	301	305.9	341	342	344	348.4	387	388	390	394.1	436	437	439	443.3	488	490	491	495.9												
	Lo PR	124	126	129	134.3	132	133	137	141.8	138	140	143	148.3	144	145	149	153.9	149	151	154	159.3	156	158	161	166.2												
	1150	MBh	35.0	35.5	36.6	38.1	34.7	35.2	36.2	37.8	33.8	34.3	35.3	36.9	32.3	32.8	33.8	35.4	30.4	30.9	31.9	33.5	28.7	29.2	30.2	31.8											
		S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.73	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.86	0.7											
		ΔT	27.12	25.27	21.80	18.2	27.07	25.22	21.75	18.2	27.33	25.48	22.01	18.4	27.05	25.20	21.73	18.1	26.80	24.95	21.48	17.9	27.96	26.11	22.65	19.1											
kW		2.32	2.32	2.31	2.3	2.59	2.59	2.58	2.6	2.89	2.89	2.89	2.9	3.22	3.22	3.21	3.2	3.58	3.58	3.58	3.6	4.01	4.01	4.01	4.0												
Amps		8.94	8.93	8.91	9.0	10.18	10.17	10.15	10.2	11.56	11.55	11.53	11.6	13.06	13.05	13.02	13.1	14.73	14.72	14.69	14.8	16.69	16.68	16.65	16.7												
1350	Hi PR	260	261	262	266.9	300	301	303	307.4	342	344	345	349.9	388	389	391	395.6	437	439	440	444.8	490	491	493	497.4												
	Lo PR	126	127	130	135.5	133	135	138	143.0	140	141	144	149.6	145	147	150	155.2	151	152	155	160.6	158	159	162	167.4												
	MBh	35.8	36.3	37.3	38.9	35.5	36.0	37.0	38.6	34.6	35.1	36.1	37.7	33.1	33.6	34.6	36.2	31.2	31.7	32.7	34.3	29.5	29.9	31.0	32.5												
	S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.6	1.00	0.94	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.90	0.8												
	ΔT	25.84	23.99	20.52	16.9	25.79	23.93	20.47	16.9	26.05	24.20	20.73	17.1	25.77	23.92	20.45	16.9	25.52	23.67	20.20	16.6	26.68	24.83	21.37	17.8												
	kW	2.34	2.33	2.33	2.4	2.61	2.61	2.60	2.6	2.91	2.91	2.90	2.9	3.24	3.23	3.23	3.2	3.60	3.60	3.59	3.6	4.03	4.03	4.02	4.0												
	Amps	9.01	9.00	8.98	9.1	10.25	10.24	10.22	10.3	11.63	11.62	11.60	11.7	13.13	13.12	13.10	13.2	14.80	14.79	14.77	14.9	16.76	16.75	16.73	16.8												
	Hi PR	262	264	265	269.9	303	304	306	310.4	345	347	348	352.8	391	392	394	398.5	440	441	443	447.8	493	494	496	500.3												
	Lo PR	128	130	133	138.4	136	138	141	145.9	143	144	147	152.5	148	150	153	158.0	154	155	158	163.5	160	162	165	170.3												

85	MBh	35.3	35.8	36.8	38.4	35.0	35.5	36.5	38.1	34.1	34.6	35.6	37.2	32.5	33.0	34.1	35.6	30.7	31.1	32.2	33.7	28.9	29.4	30.4	32.0	
	S/T	1.00	0.93	0.79	0.6	1.00	0.94	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.8	
	ΔT	31.52	29.66	26.20	22.6	31.47	29.61	26.15	22.6	31.73	29.87	26.41	22.8	31.45	29.59	26.13	22.5	31.20	29.35	25.88	22.3	32.36	30.51	27.04	23.5	
	kW	2.32	2.31	2.31	2.3	2.59	2.58	2.58	2.6	2.89	2.89	2.88	2.9	3.22	3.21	3.21	3.2	3.58	3.58	3.57	3.6	4.01	4.01	4.01	4.0	
	Amps	8.92	8.91	8.89	9.0	10.16	10.15	10.13	10.2	11.54	11.53	11.51	11.6	13.04	13.03	13.00	13.1	14.71	14.70	14.68	14.8	16.67	16.66	16.63	16.7	
	Hi PR	259	260	262	266.6	300	301	303	307.1	342	343	345	349.6	388	389	391	395.3	437	438	440	444.5	490	491	493	497.1	
	Lo PR	126	128	131	136.1	134	135	138	143.6	140	142	145	150.2	146	147	150	155.7	151	153	156	161.2	158	160	163	168.0	
	MBh	35.6	36.1	37.1	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.9	33.4	34.4	35.9	31.0	31.5	32.5	34.1	29.3	29.7	30.8	32.3	
	S/T	1.00	0.97	0.83	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.91	0.8	1.00	1.00	1.00	0.8	
	ΔT	30.76	28.91	25.44	21.9	30.71	28.86	25.39	21.8	30.97	29.12	25.65	22.1	30.69	28.84	25.37	21.8	30.44	28.59	25.13	21.5	31.61	29.75	26.29	22.7	
1150	kW	2.33	2.32	2.32	2.3	2.60	2.59	2.59	2.6	2.90	2.90	2.89	2.9	3.23	3.22	3.22	3.2	3.59	3.59	3.58	3.6	4.02	4.02	4.01	4.0	
	Amps	8.96	8.95	8.93	9.0	10.20	10.19	10.17	10.3	11.58	11.57	11.55	11.6	13.08	13.07	13.05	13.1	14.75	14.74	14.72	14.8	16.71	16.70	16.68	16.8	
	Hi PR	261	262	264	268.1	301	302	304	308.6	344	345	347	351.1	389	390	392	396.8	439	440	442	446.0	491	492	494	498.6	
	Lo PR	127	129	132	137.4	135	136	140	144.9	142	143	146	151.4	147	149	152	157.0	153	154	157	162.5	159	161	164	169.3	
	MBh	36.4	36.9	37.9	39.5	36.1	36.6	37.6	39.2	35.2	35.7	36.7	38.3	33.6	34.1	35.2	36.7	31.8	32.2	33.3	34.8	30.0	30.5	31.6	33.1	
	S/T	1.00	1.00	0.87	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.91	0.8	1.00	1.00	0.93	0.8	1.00	1.00	0.91	0.8	1.00	1.00	1.00	0.9	
1350	ΔT	29.48	27.63	24.16	20.6	29.43	27.58	24.11	20.5	29.69	27.84	24.37	20.8	29.41	27.56	24.09	20.5	29.16	27.31	23.85	20.3	30.33	28.47	25.01	21.4	
	kW	2.34	2.34	2.34	2.4	2.61	2.61	2.61	2.6	2.91	2.91	2.91	2.9	3.24	3.24	3.23	3.3	3.61	3.60	3.60	3.6	4.03	4.03	4.03	4.0	
	Amps	9.04	9.03	9.01	9.1	10.28	10.27	10.24	10.3	11.66	11.65	11.63	11.7	13.15	13.14	13.12	13.2	14.82	14.81	14.79	14.9	16.78	16.77	16.75	16.8	
	Hi PR	264	265	267	271.1	304	305	307	311.6	347	348	350	354.0	392	393	395	399.7	442	443	445	449.0	494	495	497	501.5	
	Lo PR	130	132	135	140.2	138	139	142	147.7	144	146	149	154.3	150	151	155	159.9	155	157	160	165.3	162	164	167	172.1	
	ΔT	29.48	27.63	24.16	20.6	29.43	27.58	24.11	20.5	29.69	27.84	24.37	20.8	29.41	27.56	24.09	20.5	29.16	27.31	23.85	20.3	30.33	28.47	25.01	21.4	

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction access fittings.
Shaded area reflects AHRI (TVA) conditions.
kW = Total system power
Amps: Unit amps (comp.+ evaporator + condenser fan motors)

		65						75						85						95						105						115					
		Outdoor Ambient Temperature																		Entering Indoor Wet Bulb Temperature																	
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	40.2	40.8	41.9	-	39.8	40.4	41.6	-	38.8	39.4	40.6	-	37.0	37.6	38.8	-	34.8	35.4	36.6	-	32.9	33.4	34.6	-	32.9	33.4	34.6	-	32.9	33.4	34.6	-				
	S/T	0.67	0.59	0.45	-	0.67	0.60	0.46	-	1.00	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.66	0.53	-	1.00	1.00	0.58	-	1.00	1.00	0.58	-	1.00	1.00	0.58	-				
	ΔT	19.15	17.27	13.77	-	19.10	17.22	13.72	-	19.36	17.48	13.98	-	19.08	17.20	13.70	-	18.83	16.95	13.45	-	20.00	18.12	14.62	-	20.00	18.12	14.62	-	20.00	18.12	14.62	-				
	kW	2.66	2.66	2.66	-	2.98	2.98	2.97	-	3.33	3.33	3.33	-	3.72	3.71	3.71	-	4.14	4.14	4.14	-	4.64	4.64	4.64	-	4.64	4.64	4.64	-	4.64	4.64	4.64	-				
	Amps	10.11	10.10	10.07	-	11.56	11.55	11.52	-	13.17	13.16	13.14	-	14.92	14.91	14.89	-	16.88	16.87	16.84	-	19.17	19.16	19.13	-	19.17	19.16	19.13	-	19.17	19.16	19.13	-				
	Hi PR	275	276	278	-	318	319	321	-	363	364	366	-	411	413	415	-	464	465	467	-	520	521	523	-	520	521	523	-	520	521	523	-				
	Lo PR	130	132	135	-	138	140	143	-	145	147	150	-	151	152	156	-	156	158	161	-	163	165	168	-	163	165	168	-	163	165	168	-				
1400	MBh	40.8	41.4	42.5	-	40.4	41.0	42.2	-	39.4	40.0	41.2	-	37.6	38.2	39.4	-	35.4	36.0	37.2	-	33.5	34.0	35.2	-	33.5	34.0	35.2	-	33.5	34.0	35.2	-				
	S/T	0.70	0.62	0.49	-	0.71	0.63	0.49	-	1.00	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.70	0.56	-	1.00	1.00	0.61	-	1.00	1.00	0.61	-	1.00	1.00	0.61	-				
	ΔT	18.23	16.35	12.85	-	18.18	16.30	12.80	-	18.44	16.56	13.06	-	18.16	16.28	12.78	-	17.91	16.03	12.53	-	19.08	17.21	13.70	-	19.08	17.21	13.70	-	19.08	17.21	13.70	-				
	kW	2.68	2.68	2.67	-	2.99	2.99	2.99	-	3.35	3.34	3.34	-	3.73	3.73	3.72	-	4.16	4.15	4.15	-	4.66	4.65	4.65	-	4.66	4.65	4.65	-	4.66	4.65	4.65	-				
	Amps	10.17	10.16	10.13	-	11.62	11.61	11.58	-	13.23	13.22	13.20	-	14.98	14.97	14.95	-	16.94	16.93	16.90	-	19.23	19.22	19.19	-	19.23	19.22	19.19	-	19.23	19.22	19.19	-				
	Hi PR	277	278	280	-	320	321	323	-	365	366	368	-	414	415	417	-	466	467	469	-	522	523	525	-	522	523	525	-	522	523	525	-				
	Lo PR	132	134	137	-	140	142	145	-	147	149	152	-	153	154	158	-	158	160	163	-	165	167	170	-	165	167	170	-	165	167	170	-				
1575	MBh	41.6	42.2	43.4	-	41.3	41.8	43.0	-	40.3	40.8	42.0	-	38.5	39.0	40.2	-	36.3	36.9	38.0	-	34.3	34.9	36.0	-	34.3	34.9	36.0	-	34.3	34.9	36.0	-				
	S/T	0.71	0.64	0.50	-	0.72	0.64	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	1.00	0.62	-	1.00	1.00	0.62	-	1.00	1.00	0.62	-				
	ΔT	17.28	15.41	11.90	-	17.23	15.36	11.85	-	17.49	15.62	12.12	-	17.21	15.34	11.83	-	16.96	15.09	11.58	-	18.14	16.26	12.76	-	18.14	16.26	12.76	-	18.14	16.26	12.76	-				
	kW	2.69	2.69	2.68	-	3.01	3.01	3.00	-	3.36	3.36	3.35	-	3.74	3.74	3.74	-	4.17	4.17	4.16	-	4.67	4.67	4.66	-	4.67	4.67	4.66	-	4.67	4.67	4.66	-				
	Amps	10.23	10.22	10.20	-	11.68	11.67	11.64	-	13.30	13.28	13.26	-	15.05	15.03	15.01	-	17.00	16.99	16.96	-	19.29	19.28	19.26	-	19.29	19.28	19.26	-	19.29	19.28	19.26	-				
	Hi PR	280	281	283	-	323	324	326	-	368	369	371	-	416	417	419	-	469	470	472	-	524	526	527	-	524	526	527	-	524	526	527	-				
	Lo PR	135	137	140	-	143	144	148	-	150	151	154	-	155	157	160	-	161	163	166	-	168	170	173	-	168	170	173	-	168	170	173	-				
75	MBh	40.2	40.8	42.0	43.8	39.9	40.4	41.6	43.4	38.8	39.4	40.6	42.4	37.0	37.6	38.8	40.6	34.9	35.4	36.6	38.4	32.9	33.4	34.6	36.4	32.9	33.4	34.6	36.4	32.9	33.4	34.6	36.4				
	S/T	0.80	0.72	0.58	0.4	1.00	0.73	0.59	0.4	1.00	0.75	0.61	0.5	1.00	0.77	0.63	0.5	1.00	1.00	0.66	0.5	1.00	1.00	0.71	0.6	1.00	1.00	0.71	0.6	1.00	1.00	0.71	0.6				
	ΔT	23.27	21.39	17.89	14.3	23.22	21.34	17.84	14.2	23.48	21.61	18.10	14.5	23.20	21.32	17.82	14.2	22.95	21.07	17.57	13.9	24.12	22.25	18.75	15.1	24.12	22.25	18.75	15.1	24.12	22.25	18.75	15.1				
	kW	2.66	2.66	2.65	2.7	2.98	2.98	2.97	3.0	3.33	3.33	3.32	3.3	3.71	3.71	3.71	3.7	4.14	4.14	4.13	4.2	4.64	4.64	4.63	4.7	4.64	4.64	4.63	4.7	4.64	4.64	4.63	4.7				
	Amps	10.10	10.09	10.06	10.2	11.55	11.54	11.51	11.6	13.16	13.15	13.13	13.2	14.91	14.90	14.88	15.0	16.87	16.86	16.83	16.9	19.16	19.15	19.12	19.2	19.16	19.15	19.12	19.2	19.16	19.15	19.12	19.2				
	Hi PR	275	276	278	283.0	318	319	321	326.0	363	364	366	371.1	412	413	415	419.6	464	465	467	471.9	520	521	523	527.7	520	521	523	527.7	520	521	523	527.7				
	Lo PR	130	132	135	140.6	138	140	143	148.4	145	147	150	155.3	151	152	156	161.1	156	158	161	166.7	164	165	168	173.8	164	165	168	173.8	164	165	168	173.8				
1400	MBh	40.8	41.4	42.6	44.4	40.5	41.0	42.2	44.0	39.4	40.0	41.2	43.0	37.6	38.2	39.4	41.2	35.5	36.0	37.2	39.0	33.5	34.0	35.2	37.0	33.5	34.0	35.2	37.0	33.5	34.0	35.2	37.0				
	S/T	0.83	0.75	0.62	0.5	1.00	0.76	0.62	0.5	1.00	0.78	0.65	0.5	1.00	0.80	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.74	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.74	0.6				
	ΔT	22.35	20.48	16.97	13.3	22.30	20.42	16.92	13.3	22.56	20.69	17.19	13.6	22.28	20.41	16.90	13.3	22.03	20.16	16.65	13.0	23.20	21.33	17.83	14.2	23.20	21.33	17.83	14.2	23.20	21.33	17.83	14.2				
	kW	2.68	2.67	2.67	2.7	2.99	2.99	2.98	3.0	3.35	3.34	3.34	3.4	3.73	3.73	3.72	3.7	4.15	4.15	4.15	4.2	4.66	4.65	4.65	4.7	4.66	4.65	4.65	4.7	4.66	4.65	4.65	4.7				
	Amps	10.16	10.15	10.12	10.2	11.61	11.60	11.57	11.7	13.22	13.21	13.19	13.3	14.97	14.96	14.94	15.0	16.93	16.92	16.89	17.0	19.22	19.21	19.18	19.3	19.22	19.21	19.18	19.3	19.22	19.21	19.18	19.3				
	Hi PR	277	278	280	285.1	320	321	323	328.2	365	367	368	373.2	414	415	417	421.7	466	467	469	474.1	522	523	525	529.9	522	523	525	529.9	522	523	525	529.9				
	Lo PR	132	134	137	142.6	140	142	145	150.4	147	149	152	157.3	153	154	158	163.1	158	160	163	168.7	166	167	170	175.8	166	167	170	175.8	166	167	170	175.8				
1575	MBh	41.7	42.2	43.4	45.2	41.3	41.9	43.1	44.9	40.3	40.8	42.0	43.8	38.5	39.1	40.2	42.0	36.3	36.9	38.1	39.9	34.3	34.9	36.1	37.9	34.3	34.9	36.1	37.9	34.3	34.9	36.1	37.9				
	S/T	1.00	0.76	0.63	0.5	1.00	0.77	0.63	0.5	1.00	0.80	0.66	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.75	0.6	1.00	1.0.						

		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
IDB	Airflow	Entering Indoor Wet Bulb Temperature																																			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1250	MBh	40.4	41.0	42.2	44.0	40.1	40.6	41.8	43.6	39.0	39.6	40.8	42.6	37.3	37.8	39.0	40.8	35.1	35.6	36.8	38.6	33.1	33.6	34.8	36.6	1.00	0.84	0.71	0.6							
		S/T	27.42	25.55	22.04	18.4	27.37	25.49	21.99	18.4	27.63	25.76	22.26	18.6	27.35	25.48	21.97	18.3	27.10	25.22	21.72	18.1	28.27	26.40	22.90	19.3	2.66	2.66	2.66	2.7							
		ΔT	10.11	10.10	10.07	10.2	11.56	11.54	11.52	11.6	13.17	13.16	13.14	13.2	14.92	14.91	14.88	15.0	16.87	16.86	16.84	16.9	19.17	19.16	19.13	19.2	40.1	40.6	41.8	43.6							
		Amps	276	277	279	283.5	319	320	322	326.5	364	365	367	371.6	412	413	415	420.1	465	466	468	472.4	520	522	523	528.2	39.0	39.6	40.8	42.6							
		Hi PR	131	132	136	141.2	139	140	144	149.0	146	147	150	155.8	151	153	156	161.6	157	159	162	167.3	164	166	169	174.4	1.00	0.88	0.74	0.6							
	1400	MBh	41.0	41.6	42.8	44.6	40.7	41.2	42.4	44.2	39.6	40.2	41.4	43.2	37.9	38.4	39.6	41.4	35.7	36.2	37.4	39.2	33.7	34.2	35.4	37.2	26.50	24.63	21.13	17.5							
		S/T	26.50	24.63	21.13	17.5	26.45	24.58	21.07	17.4	26.72	24.84	21.34	17.7	26.43	24.56	21.06	17.4	26.18	24.31	20.81	17.2	27.36	25.48	21.98	18.4	2.98	2.98	2.97	3.0							
		ΔT	10.17	10.16	10.13	10.2	11.62	11.60	11.58	11.7	13.23	13.22	13.20	13.3	14.98	14.97	14.95	15.1	16.94	16.92	16.90	17.0	19.23	19.22	19.19	19.3	2.68	2.67	2.67	2.7							
		kW	278	279	281	285.6	321	322	324	328.7	366	367	369	373.7	414	416	417	422.2	467	468	470	474.6	523	524	526	530.4	40.1	40.6	41.8	43.6							
		Amps	133	134	138	143.2	141	142	146	151.0	148	149	152	157.8	153	155	158	163.6	159	161	164	169.3	166	168	171	176.4	1.00	0.89	0.75	0.6							
1575	MBh	41.9	42.4	43.6	45.4	41.5	42.1	43.3	45.1	40.5	41.0	42.2	44.0	38.7	39.3	40.4	42.3	36.5	37.1	38.3	40.1	34.5	35.1	36.3	38.1	25.56	23.68	20.18	16.6								
	S/T	25.56	23.68	20.18	16.6	25.51	23.63	20.13	16.5	25.77	23.89	20.39	16.8	25.49	23.61	20.11	16.5	25.24	23.36	19.86	16.2	26.41	24.53	21.03	17.4	2.69	2.69	2.68	2.7								
	ΔT	10.23	10.22	10.19	10.3	11.68	11.67	11.64	11.8	13.29	13.28	13.26	13.4	15.04	15.03	15.01	15.1	17.00	16.99	16.96	17.1	19.29	19.28	19.25	19.4	40.1	40.6	41.8	43.6								
	kW	280	282	283	288.2	323	325	326	331.2	368	370	372	376.3	417	418	420	424.8	469	470	472	477.1	525	526	528	533.0	2.69	2.69	2.68	2.7								
	Amps	136	137	140	145.9	143	144	148	153.7	150	152	155	160.5	156	158	161	166.3	162	163	167	172.0	169	170	174	179.1	1.00	0.90	0.76	0.6								

85	1250	MBh	41.1	41.7	42.8	44.7	40.7	41.3	42.5	44.3	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.8	34.3	35.5	37.3
		S/T	1.00	0.95	0.81	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.8
		ΔT	31.10	29.23	25.73	22.1	31.05	29.18	25.68	22.0	31.32	29.44	25.94	22.3	31.03	29.16	25.66	22.0	30.78	28.91	25.41	21.8	31.96	30.08	26.58	23.0
		kW	2.67	2.67	2.66	2.7	2.99	2.98	2.98	3.0	3.34	3.34	3.33	3.4	3.72	3.72	3.71	3.7	4.15	4.15	4.14	4.2	4.65	4.65	4.64	4.7
		Amps	10.13	10.12	10.10	10.2	11.58	11.57	11.55	11.7	13.20	13.19	13.16	13.3	14.95	14.94	14.91	15.0	16.90	16.89	16.87	17.0	19.20	19.18	19.16	19.3
		Hi PR	277	278	280	284.8	320	321	323	327.8	365	366	368	372.9	414	415	417	421.4	456	457	469	473.7	522	523	525	529.5
	Lo PR	133	134	138	143.1	141	142	145	150.9	147	149	152	157.8	153	155	158	163.6	166	167	164	169.2	166	168	171	176.3	
	1400	MBh	41.7	42.3	43.4	45.3	41.3	41.9	43.1	44.9	40.3	40.9	42.0	43.9	38.5	39.1	40.3	42.1	36.3	36.9	38.1	39.9	34.4	34.9	36.1	37.9
		S/T	1.00	1.00	0.84	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
		ΔT	30.19	28.31	24.81	21.2	30.13	28.26	24.76	21.1	30.40	28.52	25.02	21.4	30.11	28.24	24.74	21.1	29.86	27.99	24.49	20.9	31.04	29.16	25.66	22.0
		kW	2.68	2.68	2.68	2.7	3.00	3.00	2.99	3.0	3.35	3.35	3.34	3.4	3.73	3.73	3.73	3.8	4.16	4.16	4.15	4.2	4.66	4.66	4.66	4.7
		Amps	10.20	10.18	10.16	10.3	11.64	11.63	11.61	11.7	13.26	13.25	13.22	13.3	15.01	15.00	14.97	15.1	16.96	16.95	16.93	17.0	19.26	19.24	19.22	19.3
Hi PR		279	280	282	286.9	322	323	325	329.9	367	368	370	375.0	416	417	419	423.5	468	469	471	475.8	524	525	527	531.7	
Lo PR	135	136	140	145.1	143	144	147	152.9	149	151	154	159.8	155	157	160	165.6	161	162	166	171.2	168	170	173	178.3		
1575	MBh	42.5	43.1	44.3	46.1	42.2	42.7	43.9	45.7	41.1	41.7	42.9	44.7	39.4	39.9	41.1	42.9	37.2	37.7	38.9	40.7	35.2	35.8	36.9	38.8	
	S/T	1.00	1.00	0.86	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.89	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	1.0	
	ΔT	29.24	27.36	23.86	20.2	29.19	27.31	23.81	20.2	29.45	27.58	24.07	20.4	29.17	27.29	23.79	20.2	28.92	27.04	23.54	19.9	30.09	28.22	24.72	21.1	
	kW	2.70	2.69	2.69	2.7	3.01	3.01	3.01	3.0	3.37	3.36	3.36	3.4	3.75	3.75	3.74	3.8	4.18	4.17	4.17	4.2	4.68	4.67	4.67	4.7	
	Amps	10.26	10.25	10.22	10.3	11.71	11.69	11.67	11.8	13.32	13.31	13.29	13.4	15.07	15.06	15.03	15.1	17.03	17.01	16.99	17.1	19.32	19.31	19.28	19.4	
	Hi PR	282	283	285	289.5	325	326	328	332.5	370	371	373	377.6	418	419	421	426.1	471	472	474	478.4	526	528	530	534.3	
Lo PR	137	139	142	147.8	145	146	150	155.6	152	154	157	162.4	158	159	163	168.2	164	165	168	173.9	171	172	176	181.0		

DB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI (TVA) conditions.

kW = Total system power
Amps: Unit amps (comp. + evaporator + condenser fan motors)

		Outdoor Ambient Temperature																																							
		65						75						85						95						105						115									
		Entering Indoor Wet Bulb Temperature																																							
IDB	Airflow	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199	203			
70	MBh	47.0	47.7	49.1	-	46.6	47.2	48.6	-	45.4	46.0	47.4	-	43.3	43.9	45.3	-	40.7	41.3	42.7	-	38.3	39.0	40.4	-	38.3	39.0	40.4	-	38.3	39.0	40.4	-	38.3	39.0	40.4	-	38.3	39.0	40.4	-
	S/T	0.64	0.57	0.43	-	0.65	0.57	0.43	-	1.00	0.60	0.46	-	1.00	0.62	0.48	-	1.00	0.64	0.50	-	1.00	1.00	0.55	-	1.00	1.00	0.55	-	1.00	1.00	0.55	-	1.00	1.00	0.55	-	1.00	1.00	0.55	-
	ΔT	19.89	18.01	14.51	-	19.84	17.96	14.45	-	20.10	18.23	14.72	-	19.82	17.94	14.44	-	19.57	17.69	14.18	-	20.75	18.87	15.36	-	20.75	18.87	15.36	-	20.75	18.87	15.36	-	20.75	18.87	15.36	-	20.75	18.87	15.36	-
	kW	3.19	3.18	3.18	-	3.54	3.54	3.53	-	3.94	3.94	3.93	-	4.37	4.37	4.36	-	4.85	4.85	4.84	-	5.41	5.41	5.41	-	5.41	5.41	5.41	-	5.41	5.41	5.41	-	5.41	5.41	5.41	-	5.41	5.41	5.41	-
	Amps	11.40	11.39	11.36	-	13.03	13.02	12.99	-	14.86	14.84	14.81	-	16.82	16.81	16.78	-	19.03	19.01	18.98	-	21.61	21.59	21.57	-	21.61	21.59	21.57	-	21.61	21.59	21.57	-	21.61	21.59	21.57	-	21.61	21.59	21.57	-
	Hi PR	268	269	271	-	310	311	313	-	354	355	357	-	402	403	405	-	453	454	456	-	508	509	511	-	508	509	511	-	508	509	511	-	508	509	511	-	508	509	511	-
70	Lo PR	130	131	135	-	138	139	142	-	144	146	149	-	150	152	155	-	156	158	161	-	163	165	168	-	163	165	168	-	163	165	168	-	163	165	168	-	163	165	168	-
	MBh	47.4	48.1	49.5	-	47.0	47.7	49.1	-	45.8	46.4	47.8	-	43.7	44.3	45.7	-	41.1	41.8	43.2	-	38.8	39.4	40.8	-	38.8	39.4	40.8	-	38.8	39.4	40.8	-	38.8	39.4	40.8	-	38.8	39.4	40.8	-
	S/T	0.68	0.60	0.46	-	0.69	0.61	0.47	-	1.00	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.68	0.54	-	1.00	1.00	0.59	-	1.00	1.00	0.59	-	1.00	1.00	0.59	-	1.00	1.00	0.59	-	1.00	1.00	0.59	-
	ΔT	19.17	17.29	13.79	-	19.12	17.24	13.74	-	19.39	17.51	14.00	-	19.10	17.22	13.72	-	18.85	16.97	13.47	-	20.03	18.15	14.64	-	20.03	18.15	14.64	-	20.03	18.15	14.64	-	20.03	18.15	14.64	-	20.03	18.15	14.64	-
	kW	3.20	3.19	3.19	-	3.55	3.55	3.54	-	3.95	3.95	3.94	-	4.38	4.38	4.37	-	4.86	4.86	4.85	-	5.43	5.42	5.42	-	5.43	5.42	5.42	-	5.43	5.42	5.42	-	5.43	5.42	5.42	-	5.43	5.42	5.42	-
	Amps	11.46	11.45	11.42	-	13.09	13.08	13.05	-	14.91	14.90	14.87	-	16.88	16.87	16.84	-	19.08	19.07	19.04	-	21.66	21.65	21.62	-	21.66	21.65	21.62	-	21.66	21.65	21.62	-	21.66	21.65	21.62	-	21.66	21.65	21.62	-
70	Hi PR	269	271	272	-	312	313	315	-	356	357	359	-	403	404	406	-	454	456	458	-	509	510	512	-	509	510	512	-	509	510	512	-	509	510	512	-	509	510	512	-
	Lo PR	131	133	136	-	139	140	144	-	146	147	151	-	152	153	156	-	157	159	162	-	164	166	169	-	164	166	169	-	164	166	169	-	164	166	169	-	164	166	169	-
	MBh	48.5	49.2	50.6	-	48.1	48.8	50.2	-	46.9	47.5	48.9	-	44.8	45.4	46.8	-	42.2	42.9	44.3	-	39.9	40.5	41.9	-	39.9	40.5	41.9	-	39.9	40.5	41.9	-	39.9	40.5	41.9	-	39.9	40.5	41.9	-
	S/T	0.72	0.65	0.51	-	0.73	0.65	0.51	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.72	0.58	-	1.00	1.00	0.63	-	1.00	1.00	0.63	-	1.00	1.00	0.63	-	1.00	1.00	0.63	-	1.00	1.00	0.63	-
	ΔT	17.83	15.95	12.45	-	17.78	15.90	12.40	-	18.05	16.17	12.66	-	17.76	15.88	12.38	-	17.51	15.63	12.13	-	18.69	16.81	13.30	-	18.69	16.81	13.30	-	18.69	16.81	13.30	-	18.69	16.81	13.30	-	18.69	16.81	13.30	-
	kW	3.22	3.22	3.21	-	3.57	3.57	3.57	-	3.97	3.97	3.96	-	4.40	4.40	4.39	-	4.88	4.88	4.87	-	5.45	5.45	5.44	-	5.45	5.45	5.44	-	5.45	5.45	5.44	-	5.45	5.45	5.44	-	5.45	5.45	5.44	-
70	Amps	11.56	11.54	11.52	-	13.19	13.18	13.15	-	15.01	15.00	14.97	-	16.98	16.96	16.94	-	19.18	19.17	19.14	-	21.76	21.75	21.72	-	21.76	21.75	21.72	-	21.76	21.75	21.72	-	21.76	21.75	21.72	-	21.76	21.75	21.72	-
	Hi PR	273	274	276	-	315	316	318	-	359	360	362	-	406	408	409	-	458	459	461	-	512	514	515	-	512	514	515	-	512	514	515	-	512	514	515	-	512	514	515	-
	Lo PR	134	136	139	-	142	144	147	-	149	150	154	-	155	156	160	-	160	162	165	-	168	169	172	-	168	169	172	-	168	169	172	-	168	169	172	-	168	169	172	-
	MBh	47.0	47.7	49.1	51.2	46.6	47.3	48.7	50.8	45.4	46.0	47.4	49.6	43.3	43.9	45.3	47.5	40.7	41.4	42.8	44.9	38.4	39.0	40.4	42.6	40.7	41.4	42.8	44.9	38.4	39.0	40.4	42.6	40.7	41.4	42.8	44.9	38.4	39.0	40.4	42.6
	S/T	0.78	0.70	0.56	0.4	1.00	0.70	0.57	0.4	1.00	0.73	0.59	0.4	1.00	0.75	0.61	0.5	1.00	1.00	0.63	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.63	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.69	0.5
	ΔT	24.02	22.14	18.64	15.0	23.97	22.09	18.58	15.0	24.23	22.35	18.85	15.2	23.95	22.07	18.56	14.9	23.70	21.82	18.31	14.7	24.87	23.00	19.49	15.9	23.70	21.82	18.31	14.7	24.87	23.00	19.49	15.9	23.70	21.82	18.31	14.7	24.87	23.00	19.49	15.9
1400	kW	3.18	3.18	3.17	3.2	3.54	3.54	3.53	3.6	3.94	3.93	3.93	4.0	4.37	4.36	4.36	4.4	4.85	4.85	4.84	4.9	5.41	5.41	5.40	5.4	4.85	4.85	4.84	4.9	5.41	5.41	5.40	5.4	5.41	5.41	5.40	5.4	5.41	5.41	5.40	5.4
	Amps	11.39	11.38	11.35	11.5	13.02	13.01	12.98	13.1	14.84	14.83	14.80	14.9	16.81	16.80	16.77	16.9	19.01	19.00	18.97	19.1	21.60	21.58	21.56	21.7	19.01	19.00	18.97	19.1	21.60	21.58	21.56	21.7	21.60	21.58	21.56	21.7	21.60	21.58	21.56	21.7
	Hi PR	268	269	271	275.8	310	311	313	318.0	354	356	357	362.1	402	403	405	409.7	453	454	456	460.9	508	509	511	515.6	453	454	456	460.9	508	509	511	515.6	508	509	511	515.6	508	509	511	515.6
	Lo PR	130	131	135	140.1	138	139	142	148.0	144	146	149	154.9	150	152	155	160.7	156	158	161	166.4	163	165	168	173.5	156	158	161	166.4	163	165	168	173.5	163	165	168	173.5	163	165	168	173.5
	MBh	47.4	48.1	49.5	51.6	47.0	47.7	49.1	51.2	45.8	46.5	47.9	50.0	43.7	44.4	45.8	47.9	41.1	41.8	43.2	45.3	38.8	39.4	40.8	43.0	41.1	41.8	43.2	45.3	38.8	39.4	40.8	43.0	41.1	41.8	43.2	45.3	38.8	39.4	40.8	43.0
1525	S/T	0.81	0.73	0.60	0.5	1.00	0.74	0.60	0.5	1.00	0.77	0.63	0.5	1.00	0.79	0.65	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.72	0.6	1.00	1.00	0.67	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.67	0.5
	ΔT	23.30	21.42	17.92	14.3	23.25	21.37	17.87	14.2	23.51	21.64	18.13	14.5	23.23	21.35	17.85	14.2	22.98	21.10	17.60	14.0	24.16	22.28	18.77	15.1	22.98	21.10	17.60	14.0	24.16	22.28	18.77	15.1	24.16	22.28	18.77	15.1	24.16	22.28	18.77	15.1
	kW	3.19	3.19	3.19	3.2	3.55	3.55	3.54	3.6	3.95	3.95	3.94	4.0	4.38	4.38	4.37	4.4	4.86	4.86	4.85	4.9	5.42	5.42	5.41	5.4	4.86	4.86	4.85	4.9	5.42	5.42	5.41	5.4	5.42	5.42	5.41	5.4	5.42	5.42	5.41	5.4

		Outdoor Ambient Temperature										105										115									
		65										75										85									
		Entering Indoor Wet Bulb Temperature										95										105									
IDB	Airflow	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175
80	MBh	47.3	47.9	49.3	51.5	46.8	47.5	48.9	51.0	45.6	46.3	47.7	49.8	43.5	44.2	45.6	47.7	41.0	41.6	43.0	45.2	38.6	39.3	40.7	42.8	1.00	0.83	0.69	0.5	1.00	0.7
	S/T	1.00	0.83	0.69	0.5	1.00	0.83	0.69	0.5	1.00	0.83	0.69	0.5	1.00	0.83	0.69	0.5	1.00	0.83	0.69	0.5	1.00	0.83	0.69	0.5	1.00	0.83	0.69	0.5	1.00	0.7
	ΔT	28.18	26.30	22.79	19.2	28.13	26.25	22.74	19.1	28.39	26.51	23.01	19.4	28.11	26.23	22.72	19.1	27.86	25.98	22.47	18.8	29.03	27.15	23.65	20.0	4.9	5.41	5.41	5.41	5.41	5.4
	kW	3.18	3.18	3.18	3.2	3.54	3.54	3.53	3.6	3.48	3.48	3.48	3.48	4.0	4.37	4.37	4.36	4.4	4.85	4.85	4.84	4.9	5.41	5.41	5.41	5.4	5.41	5.41	5.41	5.41	5.4
	Amps	11.46	11.44	11.36	11.5	13.03	13.02	12.99	13.1	14.85	14.84	14.81	14.9	16.82	16.81	16.78	16.9	19.02	19.01	18.98	19.1	21.61	21.59	21.56	21.7	51.0	51.1	51.1	51.1	51.1	51.6
	Hi PR	269	270	272	276.3	311	312	314	318.5	355	356	358	362.6	402	404	405	410.2	454	455	457	461.4	508	510	511	516.1	164	165	165	165	165	174.1
1525	Lo PR	130	132	135	140.7	138	140	143	148.6	145	147	150	155.4	151	152	156	161.3	157	158	161	167.0	164	165	169	174.1	39.0	39.7	41.1	43.2	39.0	41.1
	MBh	47.7	48.3	49.7	51.9	47.3	47.9	49.3	51.5	46.0	46.7	48.1	50.2	43.9	44.6	46.0	48.1	41.4	42.0	43.4	45.6	39.0	39.7	41.1	43.2	1.00	0.86	0.72	0.6	1.00	0.7
	S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.72	0.6	1.00	0.86	0.72	0.6	1.00	0.86	0.72	0.6	1.00	0.86	0.72	0.6	1.00	0.86	0.72	0.6	1.00	0.86	0.72	0.6	1.00	0.7
	ΔT	27.46	25.58	22.07	18.4	27.41	25.53	22.02	18.4	27.67	25.79	22.29	18.7	27.39	25.51	22.00	18.4	27.14	25.26	21.75	18.1	28.31	26.44	22.93	19.3	4.9	5.43	5.42	5.42	5.42	5.4
	kW	3.20	3.19	3.19	3.2	3.55	3.55	3.54	3.6	3.95	3.95	3.94	4.0	4.38	4.38	4.37	4.4	4.86	4.86	4.85	4.9	5.43	5.42	5.42	5.4	5.43	5.43	5.43	5.43	5.43	5.4
	Amps	11.46	11.44	11.42	11.5	13.09	13.07	13.05	13.2	14.91	14.89	14.87	15.0	16.88	16.86	16.84	17.0	19.08	19.06	19.04	19.2	21.66	21.65	21.62	21.7	51.0	51.1	51.1	51.1	51.1	51.6
1800	Hi PR	270	271	273	277.8	312	313	315	319.9	356	358	359	364.1	404	405	407	411.6	455	456	458	462.9	510	511	513	517.6	165	167	167	167	167	175.4
	Lo PR	132	133	136	142.0	139	141	144	149.8	146	148	151	156.7	152	154	157	162.5	158	159	163	168.2	165	167	170	175.4	40.1	40.8	42.2	44.3	40.1	42.2
	MBh	48.8	49.5	50.9	53.0	48.4	49.0	50.4	52.6	47.2	47.8	49.2	51.3	45.1	45.7	47.1	49.2	42.5	43.1	44.5	46.7	40.1	40.8	42.2	44.3	1.00	0.91	0.77	0.6	1.00	0.7
	S/T	1.00	0.91	0.77	0.6	1.00	0.91	0.77	0.6	1.00	0.91	0.77	0.6	1.00	0.91	0.77	0.6	1.00	0.91	0.77	0.6	1.00	0.91	0.77	0.6	1.00	0.91	0.77	0.6	1.00	0.7
	ΔT	26.12	24.24	20.73	17.1	26.07	24.19	20.68	17.1	26.33	24.45	20.95	17.3	26.05	24.17	20.66	17.0	25.80	23.92	20.41	16.8	26.97	25.10	21.59	18.0	4.9	5.45	5.44	5.44	5.44	5.5
	kW	3.22	3.22	3.21	3.2	3.57	3.57	3.56	3.6	3.97	3.97	3.96	4.0	4.40	4.40	4.39	4.4	4.88	4.88	4.87	4.9	5.45	5.44	5.44	5.5	5.45	5.45	5.45	5.45	5.45	5.5

85	MBh	48.1	48.7	50.1	52.3	47.6	48.3	49.7	51.8	46.4	47.1	48.5	50.6	44.3	45.0	46.4	48.5	41.7	42.4	43.8	45.9	39.4	40.1	41.5	43.6	1.00	0.93	0.79	0.6	1.00	0.8
	S/T	1.00	0.93	0.79	0.6	1.00	0.93	0.79	0.6	1.00	0.93	0.79	0.6	1.00	0.93	0.79	0.6	1.00	0.93	0.79	0.6	1.00	0.93	0.79	0.6	1.00	0.93	0.79	0.6	1.00	0.8
	ΔT	31.86	29.99	26.48	22.8	31.81	29.94	26.43	22.8	32.08	30.20	26.69	23.1	31.79	29.92	26.41	22.8	31.54	29.67	26.16	22.5	32.72	30.84	27.33	23.7	4.9	5.42	5.42	5.42	5.42	5.4
	kW	3.19	3.19	3.18	3.2	3.55	3.54	3.54	3.6	3.95	3.94	3.94	4.0	4.38	4.37	4.37	4.4	4.86	4.85	4.85	4.9	5.42	5.42	5.42	5.4	5.42	5.42	5.42	5.42	5.42	5.4
	Amps	11.43	11.42	11.39	11.5	13.06	13.05	13.02	13.1	14.88	14.87	14.84	15.0	16.85	16.84	16.81	16.9	19.05	19.04	19.01	19.1	21.64	21.62	21.60	21.7	51.0	51.1	51.1	51.1	51.1	51.6
	Hi PR	270	271	273	277.6	312	313	315	319.7	356	357	359	363.9	404	405	407	411.4	455	456	458	462.7	510	511	513	517.4	166	167	167	167	167	176.0
1525	Lo PR	132	134	137	142.6	140	142	145	150.5	147	149	152	157.4	153	154	158	163.2	159	160	163	168.9	166	167	171	176.0	40.1	40.8	42.2	44.3	40.1	42.2
	MBh	48.5	49.1	50.5	52.7	48.1	48.7	50.1	52.2	46.8	47.5	48.9	51.0	44.7	45.4	46.8	48.9	42.2	42.8	44.2	46.4	39.8	40.5	41.9	44.0	1.00	0.97	0.83	0.7	1.00	0.8
	S/T	1.00	0.97	0.83	0.7	1.00	0.97	0.83	0.7	1.00	0.97	0.83	0.7	1.00	0.97	0.83	0.7	1.00	0.97	0.83	0.7	1.00	0.97	0.83	0.7	1.00	0.97	0.83	0.7	1.00	0.8
	ΔT	31.15	29.27	25.76	22.1	31.10	29.22	25.71	22.1	31.36	29.48	25.97	22.3	31.08	29.20	25.69	22.1	30.83	28.95	25.44	21.8	32.00	30.12	26.62	23.0	4.9	5.43	5.43	5.43	5.43	5.5
	kW	3.20	3.20	3.19	3.2	3.56	3.56	3.55	3.6	3.96	3.95	3.95	4.0	4.39	4.38	4.38	4.4	4.87	4.87	4.86	4.9	5.43	5.43	5.43	5.5	5.43	5.43	5.43	5.43	5.43	5.5
	Amps	11.49	11.47	11.45	11.6	13.12	13.10	13.08	13.2	14.94	14.92	14.90	15.0	16.91	16.89	16.87	17.0	19.11	19.10	19.07	19.2	21.69	21.68	21.65	21.8	51.0	51.1	51.1	51.1	51.1	51.6
1800	Hi PR	271	273	274	279.0	313	315	317	321.2	358	359	361	365.3	405	406	408	412.9	456	458	459	464.1	511	512	514	518.8	167	169	169	169	169	177.3
	Lo PR	134	135	138	143.9	141	143	146	151.8	148	150	153	158.6	154	156	159	164.4	160	161	165	170.2	167	169	172	177.3	40.1	40.8	42.2	44.3	40.1	42.2
	MBh	49.6	50.2	51.6	53.8	49.2	49.8	51.2	53.4	47.9	48.6	50.0	52.1	45.8	46.5	47.9	50.0	43.3	43.9	45.3	47.5	40.9	41.6	43.0	45.1	1.00	1.00	1.00	1.00	1.00	1.00
	S/T	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	1.00	1.00	1.00
	ΔT	29.81	27.93	24.42	20.8	29.76	27.88	24.37	20.7	30.02	28.14	24.63	21.0	29.74	27.86	24.35	20.7	29.49	27.61	24.10	20.5	30.66	28.78	25.28	21.6	4.9	5.45	5.45	5.45	5.45	5.5
	kW	3.22	3.22	3.22	3.2	3.58	3.58	3.57	3.6	3.98	3.98	3.97	4.0	4.41	4.41	4.40	4.4	4.89	4.89	4.88	4.9	5.45	5.45	5.45	5.5	5.45	5.45	5.45	5.45	5.45	5.5

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects AHRI (TVA) conditions.

Amps: Unit amps (comp.+ evaporator + condenser fan motors)
kW = Total system power

		Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1500	MBh	26.3	26.7	27.5	-	26.1	26.4	27.2	-	25.4	25.8	26.5	-	24.2	24.6	25.4	-	22.8	23.1	23.9	-	21.4	21.8	22.6	-
		S/T	0.61	0.53	0.39	-	0.62	0.54	0.40	-	1.00	0.56	0.43	-	1.00	0.58	0.45	-	1.00	0.61	0.47	-	1.00	0.66	0.52	-
		ΔT	20.66	18.76	15.21	-	20.61	18.71	15.15	-	20.88	18.97	15.42	-	20.59	18.69	15.13	-	20.34	18.43	14.88	-	21.53	19.62	16.07	-
		kW	1196.61	1195.55	1193.25	-	1331.06	1330.00	1327.70	-	1481.14	1480.09	1477.79	-	1643.56	1642.50	1640.20	-	1825.03	1823.97	1821.67	-	2037.93	2036.87	2034.57	-
		Amps	4.25	4.24	4.23	-	4.83	4.83	4.82	-	5.48	5.48	5.47	-	6.19	6.18	6.17	-	6.98	6.97	6.96	-	7.90	7.90	7.89	-
	Hi PR	246	247	249	-	285	286	288	-	326	327	329	-	370	371	372	-	417	418	420	-	467	468	470	-	
	Lo PR	129	130	133	-	136	138	141	-	143	145	148	-	149	151	154	-	155	156	160	-	162	163	167	-	
	1700	MBh	26.7	27.1	27.8	-	26.4	26.8	27.6	-	25.8	26.1	26.9	-	24.6	24.9	25.7	-	23.1	23.5	24.3	-	21.8	22.2	23.0	-
		S/T	0.68	0.60	0.46	-	0.68	0.60	0.47	-	1.00	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.67	0.53	-	1.00	1.00	0.59	-
		ΔT	19.43	17.52	13.97	-	19.37	17.47	13.92	-	19.64	17.74	14.19	-	19.35	17.45	13.90	-	19.10	17.20	13.64	-	20.29	18.39	14.84	-
kW		1204.10	1203.04	1200.74	-	1338.55	1337.49	1335.20	-	1488.64	1487.58	1485.28	-	1651.05	1650.00	1647.70	-	1832.52	1831.46	1829.17	-	2045.42	2044.36	2042.07	-	
Amps		4.28	4.27	4.26	-	4.86	4.86	4.85	-	5.52	5.51	5.50	-	6.22	6.22	6.21	-	7.01	7.01	7.00	-	7.94	7.93	7.92	-	
1900	Hi PR	248	250	251	-	287	288	290	-	328	329	331	-	372	373	375	-	419	420	422	-	470	471	472	-	
	Lo PR	131	132	135	-	138	140	143	-	145	147	150	-	151	153	156	-	157	158	162	-	164	165	169	-	
	MBh	27.1	27.5	28.3	-	26.9	27.3	28.0	-	26.2	26.6	27.4	-	25.0	25.4	26.2	-	23.6	23.9	24.7	-	22.3	22.6	23.4	-	
	S/T	0.71	0.63	0.50	-	0.72	0.64	0.50	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.71	0.57	-	1.00	1.00	0.62	-	
	ΔT	18.40	16.50	12.94	-	18.35	16.44	12.89	-	18.61	16.71	13.16	-	18.33	16.42	12.87	-	18.07	16.17	12.62	-	19.26	17.36	13.81	-	
1900	kW	1210.31	1209.25	1206.95	-	1344.76	1343.70	1341.40	-	1494.85	1493.79	1491.49	-	1657.26	1656.21	1653.91	-	1838.73	1837.67	1835.37	-	2051.63	2050.57	2048.27	-	
	Amps	4.31	4.30	4.29	-	4.89	4.89	4.88	-	5.54	5.54	5.53	-	6.25	6.24	6.23	-	7.04	7.03	7.02	-	7.96	7.96	7.95	-	
	Hi PR	251	252	253	-	289	291	292	-	330	331	333	-	374	375	377	-	421	422	424	-	472	473	475	-	
	Lo PR	133	134	138	-	141	142	146	-	148	149	152	-	153	155	158	-	159	161	164	-	166	168	171	-	

75	1500	MBh	26.3	26.7	27.5	28.7	26.1	26.5	27.3	28.5	25.4	25.8	26.6	27.8	24.2	24.6	25.4	26.6	22.8	23.1	23.9	25.1	21.5	21.8	22.6	23.8
		S/T	0.74	0.66	0.53	0.4	1.00	0.67	0.53	0.4	1.00	0.70	0.56	0.4	1.00	0.71	0.58	0.4	1.00	1.00	0.60	0.5	1.00	1.00	0.65	0.5
		ΔT	24.84	22.94	19.39	15.7	24.79	22.89	19.34	15.7	25.06	23.16	19.60	15.9	24.77	22.87	19.32	15.6	24.52	22.62	19.06	15.4	25.71	23.81	20.25	16.6
		kW	1195.73	1194.68	1192.38	1,202.7	1330.19	1329.13	1326.83	1,337.1	1480.27	1479.21	1476.91	1,487.2	1642.69	1641.63	1639.33	1,649.6	1824.16	1823.10	1820.80	1,831.1	2037.06	2036.00	2033.70	2,044.0
		Amps	4.24	4.24	4.23	4.3	4.83	4.82	4.81	4.9	5.48	5.47	5.46	5.5	6.18	6.18	6.17	6.2	6.97	6.97	6.96	7.0	7.90	7.89	7.88	7.9
		Hi PR	246	247	249	253.5	285	286	288	292.4	326	327	329	333.1	370	371	373	377.0	417	418	420	424.3	468	469	470	474.7
		Lo PR	129	130	133	138.9	136	138	141	146.8	143	145	148	153.6	149	151	154	159.4	155	156	160	165.1	162	163	167	172.2
		MBh	26.7	27.1	27.9	29.1	26.5	26.8	27.6	28.8	25.8	26.1	26.9	28.1	24.6	25.0	25.7	26.9	23.1	23.5	24.3	25.5	21.8	22.2	23.0	24.2
		S/T	0.81	0.73	0.59	0.4	1.00	0.74	0.60	0.5	1.00	0.76	0.62	0.5	1.00	0.78	0.64	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.72	0.6
		ΔT	23.61	21.71	18.15	14.5	23.56	21.65	18.10	14.4	23.83	21.92	18.37	14.7	23.54	21.64	18.08	14.4	23.28	21.38	17.83	14.1	24.48	22.57	19.02	15.3
1700		kW	1203.23	1202.17	1199.87	1,210.2	1337.68	1336.62	1334.32	1,344.6	1487.76	1486.71	1484.41	1,494.7	1650.18	1649.12	1646.82	1,657.1	1831.65	1830.59	1828.29	1,838.6	2044.55	2043.49	2041.19	2,051.5
		Amps	4.27	4.27	4.26	4.3	4.86	4.85	4.84	4.9	5.51	5.51	5.50	5.5	6.22	6.21	6.20	6.2	7.01	7.00	6.99	7.0	7.93	7.93	7.92	8.0
		Hi PR	249	250	251	255.8	288	289	290	294.6	328	329	331	335.4	372	373	375	379.2	419	420	422	426.5	470	471	473	477.0
		Lo PR	131	132	135	141.0	138	140	143	148.8	145	147	150	155.6	151	153	156	161.4	157	158	162	167.1	164	165	169	174.2
		MBh	27.1	27.5	28.3	29.5	26.9	27.3	28.1	29.3	26.2	26.6	27.4	28.6	25.0	25.4	26.2	27.4	23.6	24.0	24.7	25.9	22.3	22.6	23.4	24.6
		S/T	0.84	0.77	0.63	0.5	1.00	0.77	0.63	0.5	1.00	0.80	0.66	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.6
		ΔT	22.58	20.68	17.13	13.4	22.53	20.63	17.07	13.4	22.80	20.89	17.34	13.7	22.51	20.61	17.05	13.4	22.26	20.35	16.80	13.1	23.45	21.54	17.99	14.3
		kW	1209.44	1208.38	1206.08	1,216.4	1343.89	1342.83	1340.53	1,350.8	1493.97	1492.92	1490.62	1,500.9	1656.39	1655.33	1653.03	1,663.3	1837.86	1836.80	1834.50	1,844.8	2050.76	2049.70	2047.40	2,057.7
		Amps	4.30	4.30	4.29	4.3	4.89	4.88	4.87	4.9	5.54	5.53	5.52	5.6	6.24	6.24	6.23	6.3	7.03	7.03	7.02	7.1	7.96	7.95	7.94	8.0
		Hi PR	251	252	254	257.9	290	291	293	296.8	330	332	333	337.5	374	375	377	381.4	422	423	424	428.7	472	473	475	479.1
		Lo PR	133	134	138	143.2	141	142	146	151.0	148	149	152	157.9	153	155	158	163.7	159	161	164	169.4	166	168	171	176.5

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction access fittings.

Shaded area reflects ACCA (TVA) conditions.

Amps: Unit amps (comp. + evaporator + condenser fan motors)

kW = Total system power

IDB	Airflow	Outdoor Ambient Temperature										105°F										115°F									
		65°F					75°F					85°F					95°F					105°F					115°F				
		Entering Indoor Wet Bulb Temperature										Entering Indoor Wet Bulb Temperature										Entering Indoor Wet Bulb Temperature									
80	1500	MBh	26.5	26.8	27.6	28.8	26.2	26.6	27.4	28.6	25.5	25.9	26.7	27.9	24.4	24.7	25.5	26.7	22.9	23.3	24.1	25.3	21.6	22.0	22.8	24.0					
		S/T	1.00	0.79	0.65	0.5	1.00	0.80	0.66	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.70	0.6	1.00	1.00	0.73	0.6	1.00	1.00	1.00	0.6					
		ΔT	29.06	27.15	23.60	19.9	29.01	27.10	23.55	19.9	29.27	27.37	23.82	20.1	28.99	27.08	23.53	19.8	28.73	26.83	23.28	19.6	29.92	28.02	24.47	20.8					
		kW	1196.44	1195.38	1193.08	1203.4	1330.89	1329.83	1327.54	1337.8	1480.98	1479.92	1477.62	1487.9	1643.39	1642.34	1640.04	1650.3	1824.86	1823.80	1821.51	1831.8	2037.76	2036.71	2034.41	2,044.7					
		Amps	4.24	4.24	4.23	4.3	4.83	4.82	4.81	4.9	5.48	5.48	5.47	5.5	6.19	6.18	6.17	6.2	6.98	6.97	6.96	7.0	7.90	7.90	7.89	7.9					
		Hi PR	247	248	250	254.0	286	287	289	292.9	326	328	329	333.6	370	371	373	377.4	418	419	420	424.7	468	469	471	475.2					
		Lo PR	129	131	134	139.5	137	139	142	147.3	144	145	149	154.2	150	151	155	160.0	155	157	160	165.7	162	164	167	172.8					
		MBh	26.8	27.2	28.0	29.2	26.6	27.0	27.8	29.0	25.9	26.3	27.1	28.3	24.7	25.1	25.9	27.1	23.3	23.7	24.4	25.6	22.0	22.3	23.1	24.3					
	1700	S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	1.00	0.7					
		ΔT	27.82	25.92	22.37	18.7	27.77	25.87	22.31	18.6	28.04	26.13	22.58	18.9	27.75	25.85	22.29	18.6	27.50	25.59	22.04	18.4	28.69	26.78	23.23	19.6					
		kW	1203.93	1202.88	1200.58	1,210.9	1338.39	1337.33	1335.03	1,345.3	1488.47	1487.41	1485.11	1,495.4	1650.89	1649.83	1647.53	1,657.8	1832.36	1831.30	1829.00	1,839.3	2045.26	2044.20	2041.90	2,052.2					
		Amps	4.28	4.27	4.26	4.3	4.86	4.86	4.85	4.9	5.51	5.51	5.50	5.5	6.22	6.22	6.21	6.3	7.01	7.00	6.99	7.0	7.94	7.93	7.92	8.0					
		Hi PR	249	250	252	256.2	288	289	291	295.1	329	330	332	335.8	373	374	375	379.7	420	421	423	427.0	470	471	473	477.4					
		Lo PR	131	133	136	141.5	139	141	144	149.3	146	147	151	156.2	152	153	157	162.0	157	159	162	167.7	164	166	169	174.8					
		1900	MBh	27.3	27.6	28.4	29.6	27.0	27.4	28.2	29.4	26.4	26.7	27.5	28.7	25.2	25.5	26.3	27.5	23.7	24.1	24.9	26.1	22.4	22.8	23.6	24.8				
			S/T	1.00	0.89	0.75	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	1.00	0.7				
ΔT	26.79		24.89	21.34	17.7	26.74	24.84	21.29	17.6	27.01	25.11	21.55	17.9	26.72	24.82	21.27	17.6	26.47	24.57	21.01	17.3	27.66	25.76	22.20	18.5						
kW	1210.14		1209.09	1206.79	1,217.1	1344.60	1343.54	1341.24	1,351.5	1494.68	1493.62	1491.32	1,501.6	1657.10	1656.04	1653.74	1,664.0	1838.57	1837.51	1835.21	1,845.5	2051.47	2050.41	2048.11	2,058.4						
Amps	4.30		4.30	4.29	4.3	4.89	4.88	4.87	4.9	5.54	5.54	5.53	5.6	6.25	6.24	6.23	6.3	7.04	7.03	7.02	7.1	7.96	7.96	7.95	8.0						
Hi PR	251		252	254	258.4	290	291	293	297.3	331	332	334	338.0	375	376	378	381.8	422	423	425	429.1	472	474	475	479.6						
Lo PR	133		135	138	143.8	141	143	146	151.6	148	150	153	158.5	154	155	159	164.2	160	161	164	169.9	167	168	172	177.1						

85	1500	MBh	26.9	27.3	28.1	29.3	26.7	27.0	27.8	29.0	26.0	26.4	27.1	28.3	24.8	25.2	26.0	27.2	23.4	23.7	24.5	25.7	22.0	22.4	23.2	24.4
		S/T	1.00	0.89	0.76	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.81	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.7
		ΔT	32.79	30.89	27.34	23.7	32.74	30.84	27.29	23.6	33.01	31.11	27.55	23.9	32.72	30.82	27.27	23.6	32.47	30.56	27.01	23.3	33.66	31.76	28.20	24.5
		kW	1199.01	1197.96	1195.66	1,205.9	1333.46	1332.41	1330.11	1,340.4	1483.55	1482.49	1480.19	1,490.5	1645.97	1644.91	1642.61	1,652.9	1827.43	1826.38	1824.08	1,834.4	2040.33	2039.28	2036.98	2,047.3
		Amps	4.26	4.25	4.24	4.3	4.84	4.84	4.83	4.9	5.49	5.49	5.48	5.5	6.20	6.19	6.18	6.2	6.99	6.98	6.97	7.0	7.91	7.91	7.90	7.9
	1700	Hi PR	248	249	251	255.1	287	288	290	294.0	328	329	330	334.7	371	373	374	378.6	419	420	422	425.9	469	470	472	476.3
		Lo PR	131	133	136	141.4	139	141	144	149.3	146	147	151	156.1	152	153	156	161.9	157	159	162	167.6	164	166	169	174.7
		MBh	27.3	27.6	28.4	29.6	27.0	27.4	28.2	29.4	26.4	26.7	27.5	28.7	25.2	25.5	26.3	27.5	23.7	24.1	24.9	26.1	22.4	22.8	23.6	24.8
		S/T	1.00	0.96	0.82	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
		ΔT	31.56	29.65	26.10	22.4	31.51	29.60	26.05	22.4	31.77	29.87	26.32	22.6	31.49	29.58	26.03	22.6	31.23	29.33	25.78	22.1	32.42	30.52	26.97	23.3
	1900	kW	1206.51	1205.45	1203.15	1,213.4	1340.96	1339.90	1337.60	1,347.9	1491.04	1489.99	1487.69	1,498.0	1653.46	1652.40	1650.10	1,660.4	1834.93	1833.87	1831.57	1,841.9	2047.83	2046.77	2044.47	2,054.8
		Amps	4.29	4.28	4.27	4.3	4.87	4.87	4.86	4.9	5.53	5.52	5.51	5.6	6.23	6.23	6.22	6.3	7.02	7.02	7.01	7.1	7.95	7.94	7.93	8.0
		Hi PR	250	251	253	257.4	289	290	292	296.3	330	331	333	337.0	374	375	377	380.8	421	422	424	428.1	471	473	474	478.6
		Lo PR	133	135	138	143.4	141	143	146	151.3	148	149	153	158.1	154	155	158	163.9	159	161	164	169.6	166	168	171	176.7
		MBh	27.7	28.1	28.9	30.1	27.5	27.9	28.6	29.8	26.8	27.2	28.0	29.2	25.6	26.0	26.8	28.0	24.2	24.5	25.3	26.5	22.8	23.2	24.0	25.2
	1900	S/T	1.00	1.00	0.86	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.89	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8
		ΔT	30.53	28.63	25.07	21.4	30.48	28.58	25.02	21.3	30.75	28.84	25.29	21.6	30.46	28.56	25.00	21.3	30.20	28.30	24.75	21.1	31.40	29.49	25.94	22.3
		kW	1212.72	1211.66	1209.36	1,219.6	1347.17	1346.11	1343.81	1,354.1	1497.25	1496.19	1493.90	1,504.2	1659.67	1658.61	1656.31	1,666.6	1841.14	1840.08	1837.78	1,848.1	2054.04	2052.98	2050.68	2,061.0
		Amps	4.32	4.31	4.30	4.3	4.90	4.90	4.89	4.9	5.55	5.55	5.54	5.6	6.26	6.25	6.24	6.3	7.05	7.04	7.03	7.1	7.97	7.97	7.96	8.0
		Hi PR	252	254	255	259.5	291	292	294	298.4	332	333	335	339.1	376	377	379	383.0	423	424	426	430.3	474	475	476	480.7
Lo PR	135	137	140	145.7	143	145	148	153.5	150	152	155	160.4	156	157	161	166.2	162	163	166	171.9	169	170	171	179.0		

		Outdoor Ambient Temperature																													
		65					75					85					95					105					115				
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
		Entering Indoor Wet Bulb Temperature																													
70		MBh	57.0	57.8	59.5	-	56.5	57.3	59.0	-	55.0	55.8	57.5	-	52.5	53.3	55.0	-	49.3	50.1	51.8	-	46.5	47.3	49.0	-	46.5	47.3	49.0	-	
		S/T	0.60	0.53	0.39	-	0.61	0.53	0.40	-	0.63	0.56	0.42	-	0.65	0.58	0.44	-	1.00	0.60	0.47	-	1.00	0.65	0.52	-	1.00	0.65	0.52	-	
		ΔT	21.45	19.46	15.74	-	21.40	19.41	15.69	-	21.68	19.69	15.97	-	21.38	19.39	15.67	-	21.11	19.12	15.40	-	22.36	20.37	16.65	-	22.36	20.37	16.65	-	
	1500	kW	3839.313835	823828.24	-	-	4282.674279	184271.60	-	-	4777.574774	084766.50	-	-	5313.145309	655302.07	-	-	5911.525908	035900.45	-	-	6613.566610	076602.49	-	-	6613.566610	076602.49	-	-	
		Amps	13.05	13.04	13.01	-	14.98	14.97	14.93	-	17.13	17.12	17.08	-	19.46	19.45	19.41	-	22.06	22.05	22.01	-	25.12	25.10	25.07	-	25.12	25.10	25.07	-	
		Hi PR	277	278	280	-	320	322	324	-	366	367	369	-	415	417	419	-	468	470	472	-	525	526	528	-	525	526	528	-	
	Lo PR	122	123	126	-	129	131	134	-	136	137	140	-	141	143	146	-	147	148	151	-	153	155	158	-	153	155	158	-		
70		MBh	57.7	58.5	60.2	-	57.2	58.0	59.7	-	55.7	56.5	58.2	-	53.2	54.0	55.7	-	50.0	50.8	52.5	-	47.2	48.0	49.7	-	47.2	48.0	49.7	-	
		S/T	0.66	0.58	0.45	-	0.66	0.59	0.45	-	0.69	0.61	0.48	-	0.71	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.70	0.57	-	1.00	0.70	0.57	-	
		ΔT	20.33	18.34	14.62	-	20.27	18.28	14.56	-	20.55	18.56	14.84	-	20.25	18.26	14.54	-	19.99	18.00	14.28	-	21.23	19.24	15.53	-	21.23	19.24	15.53	-	
	1700	kW	3860.823857	333849.75	-	-	4304.174300	684293.10	-	-	4799.074795	584788.00	-	-	5334.645331	115323.57	-	-	5933.025929	545921.96	-	-	6635.066631	576623.99	-	-	6635.066631	576623.99	-	-	
		Amps	13.15	13.13	13.10	-	15.07	15.06	15.03	-	17.23	17.21	17.18	-	19.55	19.54	19.51	-	22.16	22.14	22.11	-	25.21	25.19	25.16	-	25.21	25.19	25.16	-	
		Hi PR	279	280	282	-	323	324	326	-	368	370	371	-	418	419	421	-	471	472	474	-	527	529	530	-	527	529	530	-	
	Lo PR	124	125	128	-	131	132	136	-	137	139	142	-	143	144	147	-	148	150	153	-	155	157	160	-	155	157	160	-		
1900		MBh	58.6	59.4	61.1	-	58.1	58.9	60.6	-	56.6	57.4	59.1	-	54.0	54.8	56.5	-	50.9	51.7	53.4	-	48.0	48.8	50.5	-	48.0	48.8	50.5	-	
		S/T	0.69	0.61	0.48	-	0.70	0.62	0.49	-	0.72	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-	
		ΔT	19.37	17.38	13.66	-	19.32	17.33	13.61	-	19.60	17.61	13.89	-	19.30	17.31	13.59	-	19.03	17.04	13.32	-	20.28	18.29	14.57	-	20.28	18.29	14.57	-	
	1900	kW	3879.043875	553867.97	-	-	4322.394318	904311.32	-	-	4817.294813	814806.23	-	-	5352.865349	375341.79	-	-	5951.255947	765940.18	-	-	6653.286649	796642.21	-	-	6653.286649	796642.21	-	-	
		Amps	13.23	13.21	13.18	-	15.15	15.14	15.11	-	17.31	17.29	17.26	-	19.63	19.62	19.59	-	22.24	22.22	22.19	-	25.29	25.27	25.24	-	25.29	25.27	25.24	-	
		Hi PR	281	282	284	-	325	326	328	-	370	372	374	-	420	421	423	-	473	474	476	-	529	531	533	-	529	531	533	-	
	Lo PR	125	127	130	-	133	134	137	-	139	141	144	-	145	146	149	-	150	152	155	-	157	158	161	-	157	158	161	-		
75		MBh	57.0	57.9	59.6	62.2	56.5	57.3	59.0	61.6	55.0	55.9	57.6	60.2	52.5	53.3	55.0	57.6	49.4	50.2	51.9	54.5	46.5	47.3	49.0	51.6	46.5	47.3	49.0	51.6	
		S/T	0.73	0.65	0.52	0.4	0.74	0.66	0.53	0.4	1.00	0.69	0.55	0.4	1.00	0.70	0.57	0.4	1.00	0.73	0.59	0.5	1.00	1.00	0.64	0.5	1.00	1.00	0.64	0.5	
		ΔT	25.83	23.84	20.12	16.3	25.78	23.79	20.07	16.2	26.06	24.07	20.35	16.5	25.76	23.77	20.05	16.2	25.49	23.50	19.78	15.9	26.74	24.75	21.03	17.2	26.74	24.75	21.03	17.2	
	1500	kW	3836.433832	943825.36	3,859.3	4,279.784276	3,04268.72	4,302.6	4,774.694771	2,04763.62	4,797.5	5,310.265306	7,75299.19	5,333.1	5,908.645905	15,5897.57	5,931.5	6,610.686607	19,659.61	6,633.5	6,610.686607	19,659.61	6,633.5	6,610.686607	19,659.61	6,633.5	6,610.686607	19,659.61	6,633.5	6,610.686607	19,659.61
		Amps	13.04	13.03	12.99	13.1	14.97	14.95	14.92	15.1	17.12	17.11	17.07	17.2	19.45	19.43	19.40	19.5	22.05	22.04	22.00	22.1	25.10	25.09	25.05	25.2	25.10	25.09	25.05	25.2	
		Hi PR	277	278	280	285.0	321	322	324	328.6	366	368	370	374.3	416	417	419	423.6	469	470	472	476.7	525	527	529	533.3	525	527	529	533.3	
		Lo PR	122	123	126	131.6	129	131	134	139.0	136	137	140	145.5	141	143	146	151.0	147	148	151	156.4	153	155	158	163.1	153	155	158	163.1	
		MBh	57.8	58.6	60.3	62.9	57.2	58.0	59.8	62.4	55.8	56.6	58.3	60.9	53.2	54.0	55.7	58.3	50.1	50.9	52.6	55.2	47.2	48.0	49.7	52.3	47.2	48.0	49.7	52.3	
		S/T	0.78	0.71	0.58	0.4	0.79	0.72	0.58	0.4	1.00	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	1.00	0.70	0.6	1.00	1.00	0.70	0.6	
		ΔT	24.71	22.72	19.00	15.1	24.65	22.66	18.94	15.1	24.93	22.94	19.22	15.4	24.63	22.64	18.92	15.1	24.37	22.37	18.66	14.8	25.61	23.62	19.90	16.1	25.61	23.62	19.90	16.1	
	1700	kW	3857.933854	453846.87	3,880.8	4,301.294297	804290.22	4,324.1	4,796.194792	704785.12	4,819.0	5,331.765328.27	5,320.69	5,354.6	5,930.145926	66,5919.08	5,953.0	6,632.186628	69,662.11	6,655.0	6,632.186628	69,662.11	6,655.0	6,632.186628	69,662.11	6,655.0	6,632.186628	69,662.11	6,655.0	6,632.186628	69,662.11
		Amps	13.13	13.12	13.09	13.2	15.06	15.05	15.01	15.2	17.21	17.20	17.17	17.3	19.54	19.53	19.49	19.6	22.14	22.13	22.10	22.2	25.20	25.18	25.15	25.3	25.20	25.18	25.15	25.3	
	Hi PR	279	280	282	287.2	323	324	326	330.8	369	370	372	376.6	418	419	421	425.8	471	472	474	478.9	528	529	531	535.5	528	529	531	535.5		
	Lo PR	124	125	128	133.3	131	132	136	140.7	137	139	142	147.2	143	144	148	152.7	148	150	153	158.1	155	157	160	164.8	155	157	160	164.8		
1900		MBh	58.6	59.4	61.1	63.7	58.1	58.9	60.6	63.2	56.6	57.4	59.1	61.7	54.0	54.8	56.5	59.1	50.9	51.7	53.4	56.0	48.1	48.9	50.6	53.2	48.1	48.9	50.6	53.2	
		S/T	0.82	0.74	0.61	0.5	0.82	0.75	0.61	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	0.81	0.68	0.5	1.00	1.00	0.73	0.6	1.00	1.00	0.73	0.6	
		ΔT	23.75	21.76	18.04	14.2	23.70	21.70	17.99	14.1	23.98	21.98	18.27	14.4	23.67	21.68	17.97	14.1	23.41	21.42	17.70	13.8	24.66	22.66	18.95	15.1	24.66	22.66	18.95	15.1	
	1900	kW	3876.163872	67																											

			Outdoor Ambient Temperature										105										115										
			85										95																				
			Entering Indoor Wet Bulb Temperature																														
IDB	Airflow		75					85					95					105					115										
			59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
80		MbH	57.3	58.1	59.8	62.4	56.8	57.6	59.3	61.9	55.3	56.1	57.9	60.5	52.8	53.6	55.3	57.9	49.7	50.5	52.2	54.8	46.8	47.6	49.3	51.9	46.8	47.6	49.3	51.9			
		S/T	0.85	0.78	0.64	0.5	1.00	0.81	0.68	0.5	1.00	0.81	0.68	0.5	1.00	0.83	0.69	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.77	0.6			
		ΔT	30.24	28.25	24.53	20.7	30.19	28.19	24.48	20.6	30.47	28.47	24.76	20.9	30.16	28.17	24.46	20.6	29.90	27.91	24.19	20.3	31.15	29.15	25.44	21.6	31.15	29.15	25.44	21.6			
	1500	kW	3838.763835	283827.70	3.861.6	4282.124278	634271.05	4.305.0	4777.024773	534765.95	4.799.9	5312.595309	105301.52	5.335.4	5910.975907	495899.91	5.933.8	6613.016609	526601.94	6.635.9	6613.016609	526601.94	6.635.9	6613.016609	526601.94	6.635.9	6613.016609	526601.94	6.635.9	6613.016609	526601.94	6.635.9	
		Amps	13.05	13.04	13.00	13.2	14.98	14.96	14.93	15.1	17.13	17.12	17.08	17.2	19.46	19.44	19.41	19.6	22.06	22.05	22.01	22.2	25.11	25.10	25.06	25.2	25.11	25.10	25.06	25.2			
		Hi PR	278	279	281	285.5	321	322	324	329.1	367	368	370	374.9	416	417	419	424.1	469	470	472	477.2	526	527	529	533.8	526	527	529	533.8			
		Lo PR	122	124	127	132.2	130	131	134	139.6	136	138	141	146.1	142	143	146	151.6	147	149	152	156.9	154	155	158	163.7	154	155	158	163.7			
1700		MbH	58.1	58.9	60.6	63.2	57.5	58.3	60.0	62.6	56.1	56.9	58.6	61.2	53.5	54.3	56.0	58.6	50.4	51.2	52.9	55.5	47.5	48.3	50.0	52.6	47.5	48.3	50.0	52.6			
		S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.6	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.7	1.00	1.00	0.82	0.7			
		ΔT	29.11	27.12	23.41	19.6	29.06	27.07	23.35	19.5	29.34	27.35	23.63	19.8	29.04	27.05	23.33	19.5	28.77	26.78	23.06	19.2	30.02	28.03	24.31	20.5	30.02	28.03	24.31	20.5			
	1700	kW	3860.273856	783849.20	3.883.1	4303.624300	134292.55	4.326.5	4798.524795	044787.45	4.821.4	5334.095330	605323.02	5.356.9	5932.485928	99592.14	5.955.3	6634.516631	026623.44	6.657.4	6634.516631	026623.44	6.657.4	6634.516631	026623.44	6.657.4	6634.516631	026623.44	6.657.4	6634.516631	026623.44	6.657.4	
		Amps	13.14	13.13	13.10	13.2	15.07	15.06	15.02	15.2	17.22	17.21	17.18	17.3	19.55	19.54	19.50	19.7	22.15	22.14	22.11	22.3	25.21	25.19	25.16	25.3	25.21	25.19	25.16	25.3			
		Hi PR	280	281	283	287.7	323	325	327	331.3	369	370	372	377.1	418	420	421	426.3	471	473	475	479.4	528	529	531	536.0	528	529	531	536.0			
		Lo PR	124	126	129	133.9	131	133	136	141.3	138	139	143	147.8	143	145	148	153.2	149	150	153	158.6	156	157	160	165.4	156	157	160	165.4			
1900		MbH	58.9	59.7	61.4	64.0	58.4	59.2	60.9	63.5	56.9	57.7	59.4	62.0	54.3	55.1	56.8	59.4	51.2	52.0	53.7	56.3	48.4	49.2	50.9	53.5	48.4	49.2	50.9	53.5			
		S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.85	0.7			
		ΔT	28.16	26.17	22.45	18.6	28.10	26.11	22.39	18.5	28.38	26.39	22.67	18.8	28.08	26.09	22.37	18.5	27.82	25.83	22.11	18.3	29.06	27.07	23.35	19.5	29.06	27.07	23.35	19.5			
	1900	kW	3878.493875	003867.42	3.901.3	4321.844318	364310.77	4.344.7	4816.754813	264805.68	4.839.6	5352.315348	835341.25	5.375.2	5950.705947	215939.63	5.973.5	6652.736649	256641.67	6.675.6	6652.736649	256641.67	6.675.6	6652.736649	256641.67	6.675.6	6652.736649	256641.67	6.675.6	6652.736649	256641.67	6.675.6	
		Amps	13.22	13.21	13.18	13.3	15.15	15.14	15.10	15.3	17.30	17.29	17.25	17.4	19.63	19.62	19.58	19.7	22.23	22.22	22.19	22.3	25.29	25.27	25.24	25.4	25.29	25.27	25.24	25.4			
		Hi PR	282	283	285	289.8	326	327	329	333.5	371	372	374	379.2	420	422	424	428.4	474	475	477	481.5	530	531	533	538.2	530	531	533	538.2			
		Lo PR	126	127	131	135.7	133	135	138	143.1	140	141	144	149.6	145	147	150	155.1	151	152	155	160.5	157	159	162	167.2	157	159	162	167.2			
85		MbH	58.3	59.1	60.8	63.4	57.8	58.6	60.3	62.9	56.3	57.1	58.8	61.4	53.7	54.5	56.3	58.9	50.6	51.4	53.1	55.7	47.8	48.6	50.3	52.9	47.8	48.6	50.3	52.9			
		S/T	1.00	0.88	0.74	0.6	1.00	0.88	0.75	0.6	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.6	1.00	1.00	0.82	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.87	0.7			
		ΔT	34.15	32.16	28.44	24.6	34.09	32.10	28.39	24.5	34.37	32.38	28.67	24.8	34.07	32.08	28.37	24.5	33.81	31.82	28.10	24.2	35.06	33.06	29.35	25.5	35.06	33.06	29.35	25.5			
	1500	kW	3847.253843	763836.18	3.870.1	4290.604287	114279.53	4.313.4	4785.504782	014774.43	4.808.3	5321.075317	585310.00	5.343.9	5919.465915	975908.39	5.942.3	6621.496618	006610.42	6.644.3	6621.496618	006610.42	6.644.3	6621.496618	006610.42	6.644.3	6621.496618	006610.42	6.644.3	6621.496618	006610.42	6.644.3	
		Amps	13.09	13.07	13.04	13.2	15.02	15.00	14.97	15.1	17.17	17.15	17.12	17.3	19.50	19.48	19.45	19.6	22.10	22.08	22.05	22.2	25.15	25.13	25.10	25.2	25.15	25.13	25.10	25.2			
		Hi PR	279	280	282	286.8	322	324	326	330.4	368	369	371	376.2	417	419	421	425.4	471	472	474	478.5	527	528	530	535.1	527	528	530	535.1			
		Lo PR	124	126	129	134.0	132	133	136	141.4	138	140	143	147.9	144	145	148	153.4	149	150	154	158.8	156	157	160	165.5	156	157	160	165.5			
	1700		MbH	59.0	59.8	61.5	64.1	58.5	59.3	61.0	63.6	57.0	57.8	59.5	62.1	54.5	55.3	57.0	59.6	51.3	52.1	53.8	56.4	48.5	49.3	51.0	53.6	48.5	49.3	51.0	53.6		
			S/T	1.00	0.93	0.80	0.7	1.00	0.94	0.81	0.7	1.00	0.96	0.83	0.7	1.00	0.98	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.90	0.8	1.00	1.00	0.90	0.8		
			ΔT	33.02	31.03	27.31	23.5	32.97	30.98	27.26	23.4	33.25	31.26	27.54	23.7	32.95	30.96	27.24	23.4	32.68	30.69	26.97	23.1	33.93	31.94	28.22	24.4	33.93	31.94	28.22	24.4		
		1700	kW	3868.753865	263857.68	3.891.6	4312.104308	614301.03	4.334.9	4807.004803	524795.94	4.829.9	5342.575339	085331.50	5.365.4	5940.965937	475929.89	5.963.8	6642.996639	516631.92	6.665.8	6642.996639	516631.92	6.665.8	6642.996639	516631.92	6.665.8	6642.996639	516631.92	6.665.8	6642.996639	516631.92	6.665.8
			Amps	13.18	13.17	13.13	13.3	15.11	15.09	15.06	15.2	17.26	17.25	17.21	17.4	19.59	19.57	19.54	19.7	22.19	22.18	22.14	22.3	25.24	25.23	25.20	25.3	25.24	25.23	25.20	25.3		
		Hi PR	281	282	284	289.0	325	326	328	332.6	370	372	374	378.4	420	421	423	427.6	473	474	476	480.7	529	531	533	537.3	529	531	533	537.3			
		Lo PR	126	127	131	135.7	133	135	138	143.1	140	141	144	149.6	145	147	150	155.1	151	152	155	160.4	157	159	162	167.2	157	159	162	167.2			
1900		MbH	59.9	60.7	62.4	65.0	59.3	60.1	61.8	64.4	57.9	58.7	60.4	63.0	55.3	56.1	57.8	60.4	52.2	53.0	54.7	57.3	49.3	50.1	51.8	54.4	49.3	50.					

GP(G/U)M32404031 - RISE RANGE: 25° - 55°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	695	62	44	820	93	37	1,050	167	29	995	144	1,119	208
0.2	650	71	47	785	100	39	1,010	180	30	948	152	1,110	216
0.3	605	77	51	745	108	41	970	186	32	903	159	1,083	222
0.4	565	89	54	700	117	44	935	192	33	860	166	1,052	229
0.5	480	99	X	665	127	46	890	203	35	813	174	1,017	237
0.6	415	106	X	575	138	53	850	208	36	763	181	979	243
0.7	365	110	X	510	146	X	815	216	38	706	188	934	250
0.8	320	119	X	455	155	X	755	222	41	651	195	879	259

GP(G/U)M32406031 - RISE RANGE: 30° - 60°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	695	62	X	820	93	56	1,050	167	44	995	144	1,119	208
0.2	650	71	X	785	100	59	1,010	180	46	948	152	1,110	216
0.3	605	77	X	745	108	X	970	186	48	903	159	1,083	222
0.4	565	89	X	700	117	X	935	192	49	860	166	1,052	229
0.5	480	99	X	665	127	X	890	203	52	813	174	1,017	237
0.6	415	106	X	575	138	X	850	208	54	763	181	979	243
0.7	365	110	X	510	146	X	815	216	57	706	188	934	250
0.8	320	119	X	455	155	X	755	222	X	651	195	879	259

GP(G/U)M33004031 - RISE RANGE: 25° - 55°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	680	61	45	840	103	37	1,035	174	30	1,184	223	1,225	276
0.2	640	72	48	795	109	39	995	184	31	1,141	233	1,185	275
0.3	605	80	51	750	117	41	960	192	32	1,102	241	1,150	289
0.4	555	89	X	710	126	43	925	205	33	1,061	249	1,115	296
0.5	490	93	X	660	132	47	875	200	35	1,023	256	1,085	303
0.6	455	107	X	615	138	50	840	217	37	982	264	1,045	312
0.7	395	109	X	570	150	54	795	222	39	942	272	1,000	315
0.8	350	119	X	515	157	X	755	226	41	897	279	960	320

GP(G/U)M33006031 - RISE RANGE: 30° - 60°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	680	61	X	840	103	55	1,035	174	45	1,184	223	1,225	276
0.2	640	72	X	795	109	58	995	184	46	1,141	233	1,185	275
0.3	605	80	X	750	117	X	960	192	48	1,102	241	1,150	289
0.4	555	89	X	710	126	X	925	205	50	1,061	249	1,115	296
0.5	490	93	X	660	132	X	875	200	53	1,023	256	1,085	303
0.6	455	107	X	615	138	X	840	217	55	982	264	1,045	312
0.7	395	109	X	570	150	X	795	222	58	942	272	1,000	315
0.8	350	119	X	515	157	X	755	226	X	897	279	960	320

GP(G/U)M33604031 - RISE RANGE: 25° - 55°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	745	76	41	1,115	206	28	1,265	285	X	1,367	324	1,440	426
0.2	690	84	45	1,075	215	29	1,230	290	X	1,324	333	1,390	428
0.3	635	91	48	1,030	221	30	1,175	300	26	1,279	341	1,365	440
0.4	570	98	54	985	233	31	1,140	303	27	1,233	349	1,335	440
0.5	505	107	X	940	234	33	1,100	311	28	1,182	357	1,295	456
0.6	450	115	X	895	242	34	1,055	319	29	1,127	366	1,255	456
0.7	395	118	X	845	248	36	1,010	326	30	1,074	373	1,220	465
0.8	345	126	X	785	252	39	960	335	32	1,024	381	1,180	468

GP(G/U)M33606031 - RISE RANGE: 30° - 60°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	745	76	X	1,115	206	41	1,265	285	36	1,367	324	1,440	426
0.2	690	84	X	1,075	215	43	1,230	290	37	1,324	333	1,390	428
0.3	635	91	X	1,030	221	45	1,175	300	39	1,279	341	1,365	440
0.4	570	98	X	985	233	47	1,140	303	40	1,233	349	1,335	440
0.5	505	107	X	940	234	49	1,100	311	42	1,182	357	1,295	456
0.6	450	115	X	895	242	52	1,055	319	44	1,127	366	1,255	456
0.7	395	118	X	845	248	55	1,010	326	46	1,074	373	1,220	465
0.8	345	126	X	785	252	59	960	335	48	1,024	381	1,180	468

GP(G/U)M33608031 - RISE RANGE: 30° - 60°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	745	76	X	1,115	206	55	1,265	285	49	1,367	324	1,440	426
0.2	690	84	X	1,075	215	57	1,230	290	50	1,324	333	1,390	428
0.3	635	91	X	1,030	221	60	1,175	300	52	1,279	341	1,365	440
0.4	570	98	X	985	233	X	1,140	303	54	1,233	349	1,335	440
0.5	505	107	X	940	234	X	1,100	311	56	1,182	357	1,295	456
0.6	450	115	X	895	242	X	1,055	319	58	1,127	366	1,255	456
0.7	395	118	X	845	248	X	1,010	326	X	1,074	373	1,220	465
0.8	345	126	X	785	252	X	960	335	X	1,024	381	1,180	468

GP(G/U)M34206031 - RISE RANGE: 30° - 60°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	1,055	156	44	1,380	298	33	1,415	327	33	1,545	405	1,637	444
0.2	1,000	166	46	1,320	312	35	1,360	335	34	1,483	415	1,593	454
0.3	940	173	49	1,270	318	36	1,305	343	35	1,430	424	1,541	459
0.4	880	181	52	1,220	327	38	1,260	353	37	1,381	435	1,497	473
0.5	825	189	56	1,160	336	40	1,200	359	38	1,323	443	1,450	478
0.6	760	204	X	1,115	342	41	1,150	371	40	1,272	453	1,407	485
0.7	705	207	X	1,060	347	44	1,110	375	42	1,213	462	1,357	493
0.8	625	210	X	1,000	361	46	1,060	381	44	1,144	469	1,304	502

GP(G/U)M34208031 - RISE RANGE: 30° - 60°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	1,055	156	58	1,380	298	45	1,415	327	43	1,545	405	1,637	444
0.2	1,000	166	X	1,320	312	47	1,360	335	45	1,483	415	1,593	454
0.3	940	173	X	1,270	318	48	1,305	343	47	1,430	424	1,541	459
0.4	880	181	X	1,220	327	50	1,260	353	49	1,381	435	1,497	473
0.5	825	189	X	1,160	336	53	1,200	359	51	1,323	443	1,450	478
0.6	760	204	X	1,115	342	55	1,150	371	53	1,272	453	1,407	485
0.7	705	207	X	1,060	347	58	1,110	375	55	1,213	462	1,357	493
0.8	625	210	X	1,000	361	X	1,060	381	58	1,144	469	1,304	502

GP(G/U)M34806031 - RISE RANGE: 30° - 60°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	1,055	156	44	1,380	298	33	1,415	327	33	1,769	651	1,780	647
0.2	1,000	166	46	1,320	312	35	1,360	335	34	1,726	664	1,740	658
0.3	940	173	49	1,270	318	36	1,305	343	35	1,683	672	1,695	661
0.4	880	181	52	1,220	327	38	1,260	353	37	1,637	678	1,640	679
0.5	825	189	56	1,160	336	40	1,200	359	38	1,590	684	1,595	675
0.6	760	204	X	1,115	342	41	1,150	371	40	1,545	689	1,550	693
0.7	705	207	X	1,060	347	44	1,110	375	42	1,499	695	1,505	690
0.8	625	210	X	1,000	361	46	1,060	381	44	1,454	701	1,465	696

GP(G/U)M34808031 - RISE RANGE: 30° - 60°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	1,055	156	58	1,380	298	45	1,415	327	43	1,769	651	1,780	647
0.2	1,000	166	X	1,320	312	47	1,360	335	45	1,726	664	1,740	658
0.3	940	173	X	1,270	318	48	1,305	343	47	1,683	672	1,695	661
0.4	880	181	X	1,220	327	50	1,260	353	49	1,637	678	1,640	679
0.5	825	189	X	1,160	336	53	1,200	359	51	1,590	684	1,595	675
0.6	760	204	X	1,115	342	55	1,150	371	53	1,545	689	1,550	693
0.7	705	207	X	1,060	347	58	1,110	375	55	1,499	695	1,505	690
0.8	625	210	X	1,000	361	X	1,060	381	58	1,454	701	1,465	696

GP(G/U)M34810031 - RISE RANGE: 35° - 65°

ESP	T1 HEATING SPEED			T2 HEATING SPEED			T3 HEATING SPEED			T4 COOLING SPEED		T5 COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS
0.1	1,055	156	X	1,380	298	56	1,570	327	49	1,769	651	1,780	647
0.2	1,000	166	X	1,320	312	58	1,520	335	51	1,726	664	1,740	658
0.3	940	173	X	1,270	318	61	1,480	343	52	1,683	672	1,695	661
0.4	880	181	X	1,220	327	63	1,425	353	54	1,637	678	1,640	679
0.5	825	189	X	1,160	336	X	1,380	359	56	1,590	684	1,595	675
0.6	760	204	X	1,115	342	X	1,335	371	58	1,545	689	1,550	693
0.7	705	207	X	1,060	347	X	1,285	375	60	1,499	695	1,505	690
0.8	625	210	X	1,000	361	X	1,235	381	62	1,454	701	1,465	696

GP(G/U)M36008031 - RISE RANGE: 30° - 60°


ESP	T1 LOW-STAGE HEATING SPEED			T2 HIGH-STAGE HEATING SPEED			T3 LOW-STAGE COOLING SPEED		T4 HIGH-STAGE COOLING SPEED		T5 HIGH STATIC COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,285	252	36	1,370	297	45	1,416	294	2,047	779	2,107	831
0.2	1,235	259	37	1,330	304	46	1,354	303	1,992	786	2,060	837
0.3	1,180	272	39	1,280	314	48	1,299	312	1,938	793	2,015	850
0.4	1,130	272	41	1,220	321	50	1,248	323	1,893	799	1,972	858
0.5	1,085	280	42	1,180	341	52	1,198	335	1,848	807	1,930	864
0.6	1,035	294	45	1,135	339	54	1,146	345	1,801	815	1,888	875
0.7	975	297	47	1,085	347	57	1,076	353	1,758	823	1,850	885
0.8	910	319	51	1,035	359	59	1,021	363	1,700	828	1,805	889


GP(G/U)M36010031 - RISE RANGE: 35° - 65°

ESP	T1 LOW-STAGE HEATING SPEED			T2 HIGH-STAGE HEATING SPEED			T3 LOW-STAGE COOLING SPEED		T4 HIGH-STAGE COOLING SPEED		T5 HIGH STATIC COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,175	169	49	1,485	311	52	1,416	294	2,047	779	2,107	831
0.2	1,115	178	52	1,425	317	54	1,354	303	1,992	786	2,060	837
0.3	1,045	183	55	1,385	331	55	1,299	312	1,938	793	2,015	850
0.4	985	194	59	1,350	341	57	1,248	323	1,893	799	1,972	858
0.5	905	199	64	1,295	351	59	1,198	335	1,848	807	1,930	864
0.6	840	215	X	1,235	359	62	1,146	345	1,801	815	1,888	875
0.7	770	218	X	1,180	371	X	1,076	353	1,758	823	1,850	885
0.8	700	229	X	1,125	386	X	1,021	363	1,700	828	1,805	889


GP(G/U)M36012031 - RISE RANGE: 35° - 65°

ESP	T1 LOW-STAGE HEATING SPEED			T2 HIGH-STAGE HEATING SPEED			T3 LOW-STAGE COOLING SPEED		T4 HIGH-STAGE COOLING SPEED		T5 HIGH STATIC COOLING SPEED	
	CFM	WATTS	RISE	CFM	WATTS	RISE	CFM	WATTS	CFM	WATTS	CFM	WATTS
0.1	1,345	281	51	1,745	558	53	1,416	294	2,047	779	2,107	831
0.2	1,300	286	53	1,705	567	54	1,354	303	1,992	786	2,060	837
0.3	1,255	295	55	1,660	572	56	1,299	312	1,938	793	2,015	850
0.4	1,205	308	57	1,620	582	57	1,248	323	1,893	799	1,972	858
0.5	1,165	322	59	1,580	589	58	1,198	335	1,848	807	1,930	864
0.6	1,110	335	62	1,535	604	60	1,146	345	1,801	815	1,888	875
0.7	1,055	334	X	1,485	613	62	1,076	353	1,758	823	1,850	885
0.8	1,010	346	X	1,435	606	64	1,021	363	1,700	828	1,805	889

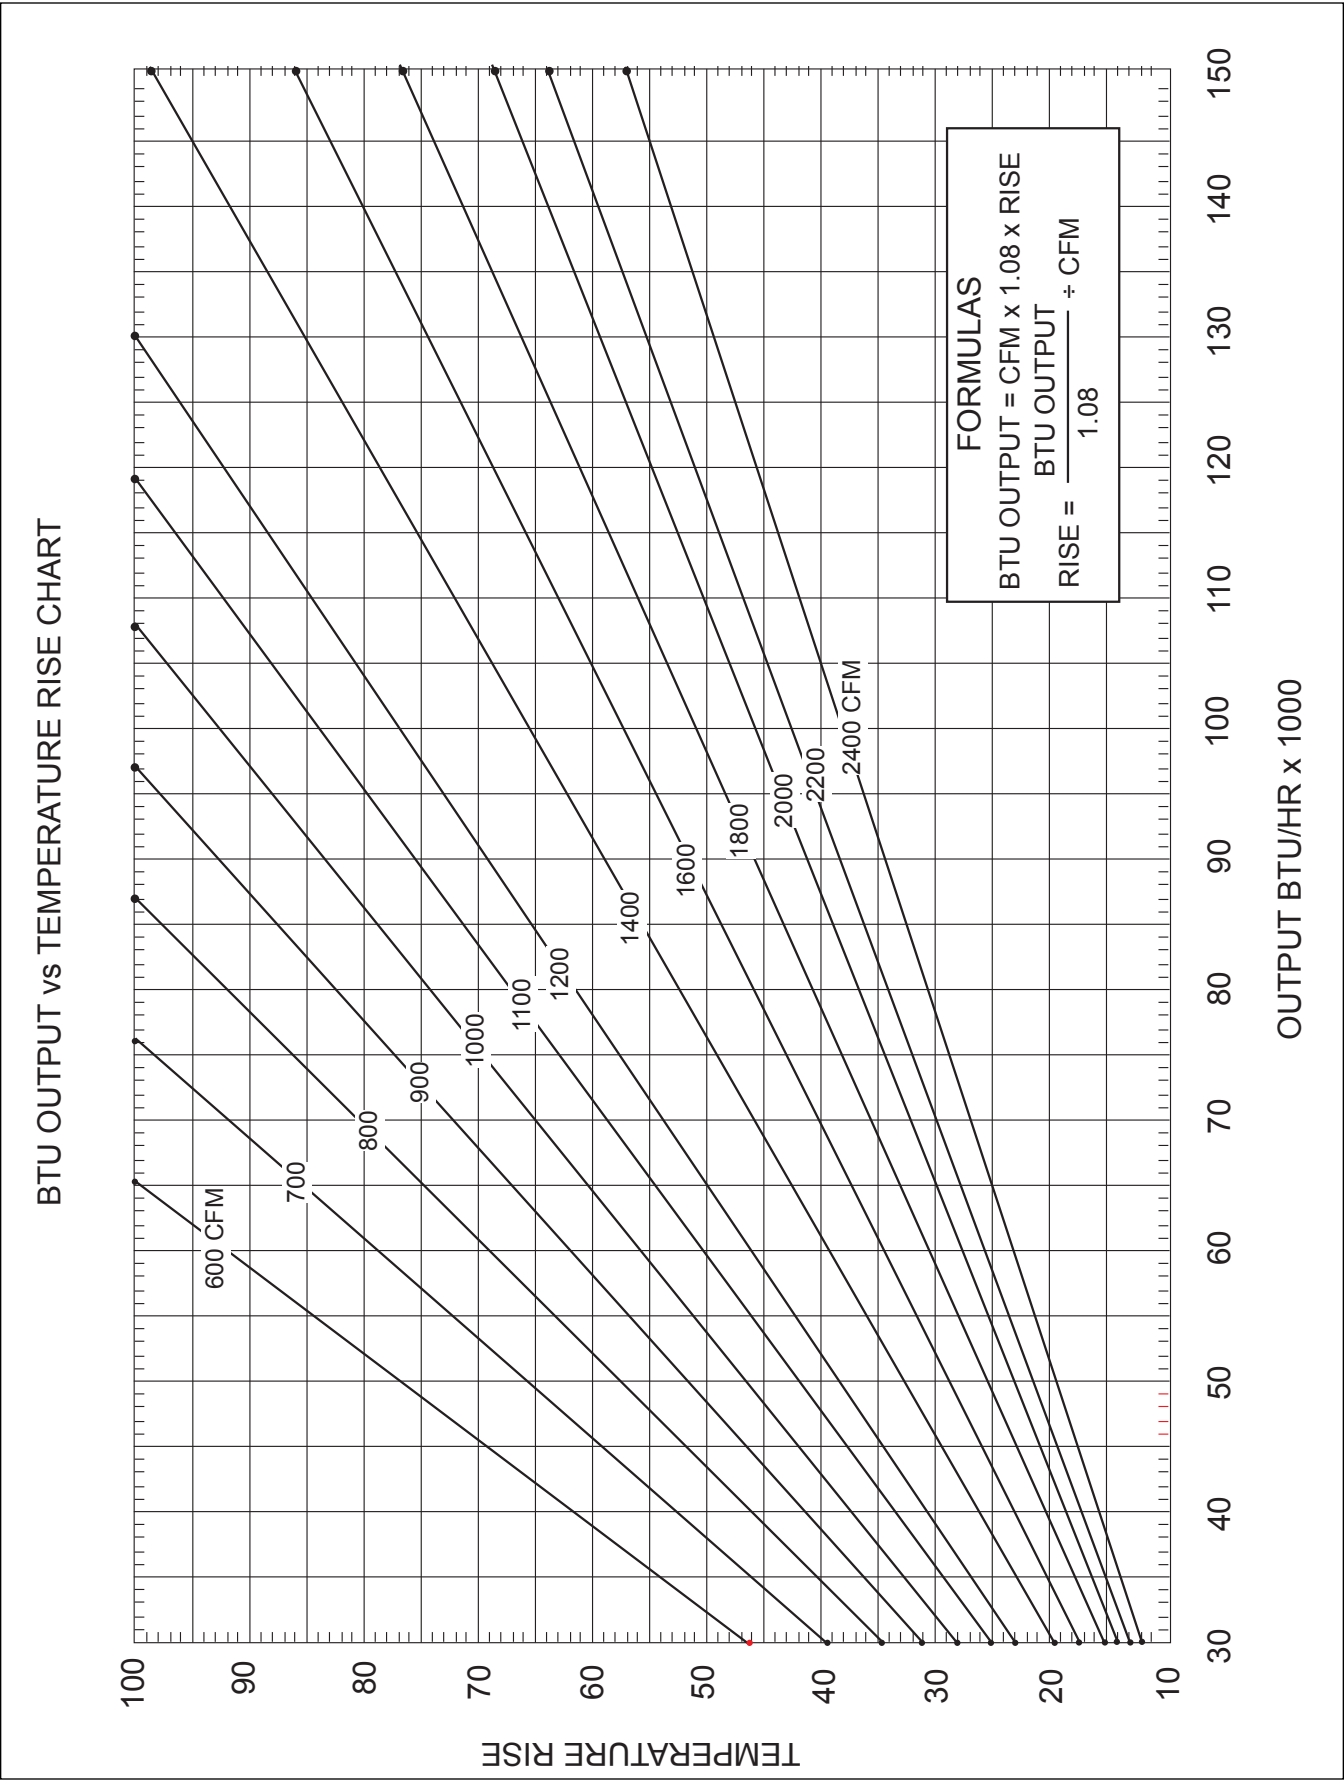


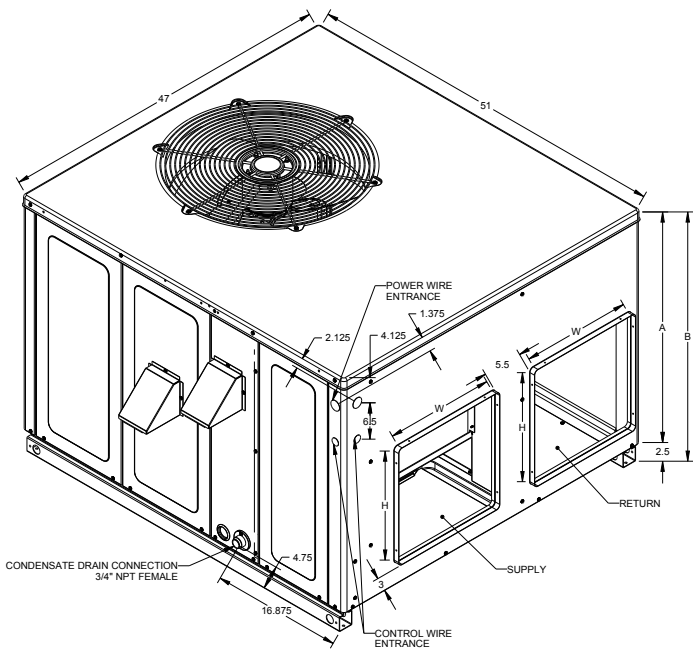

MODEL	UNIT DIMENSIONS (INCHES)				CHASSIS SIZE
			HEIGHT		
	W	D	A	B	
GP*M324***31	47	51	32	34½	Medium
GP*M330***31	47	51	32	34½	Medium
GP*M336***31	47	51	32	34½	Medium
GP*M342***31	47	51	40	42½	Large
GP*M348***31	47	51	40	42½	Large
GP*M360***31	47	51	40	42½	Large

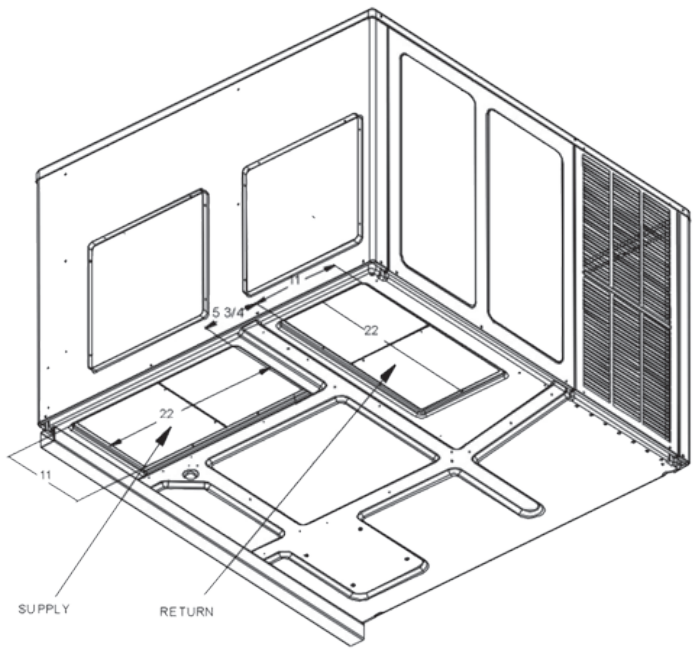


MODEL	DUCT OPENINGS			
	SUPPLY		RETURN	
	W	H	W	H
GP*M324***31	16	16	16	16
GP*M330***31	16	16	16	16
GP*M336***31	16	16	16	16
GP*M342***31	16	18	16	18
GP*M348***31	16	18	16	18
GP*M360***31	16	18	16	18

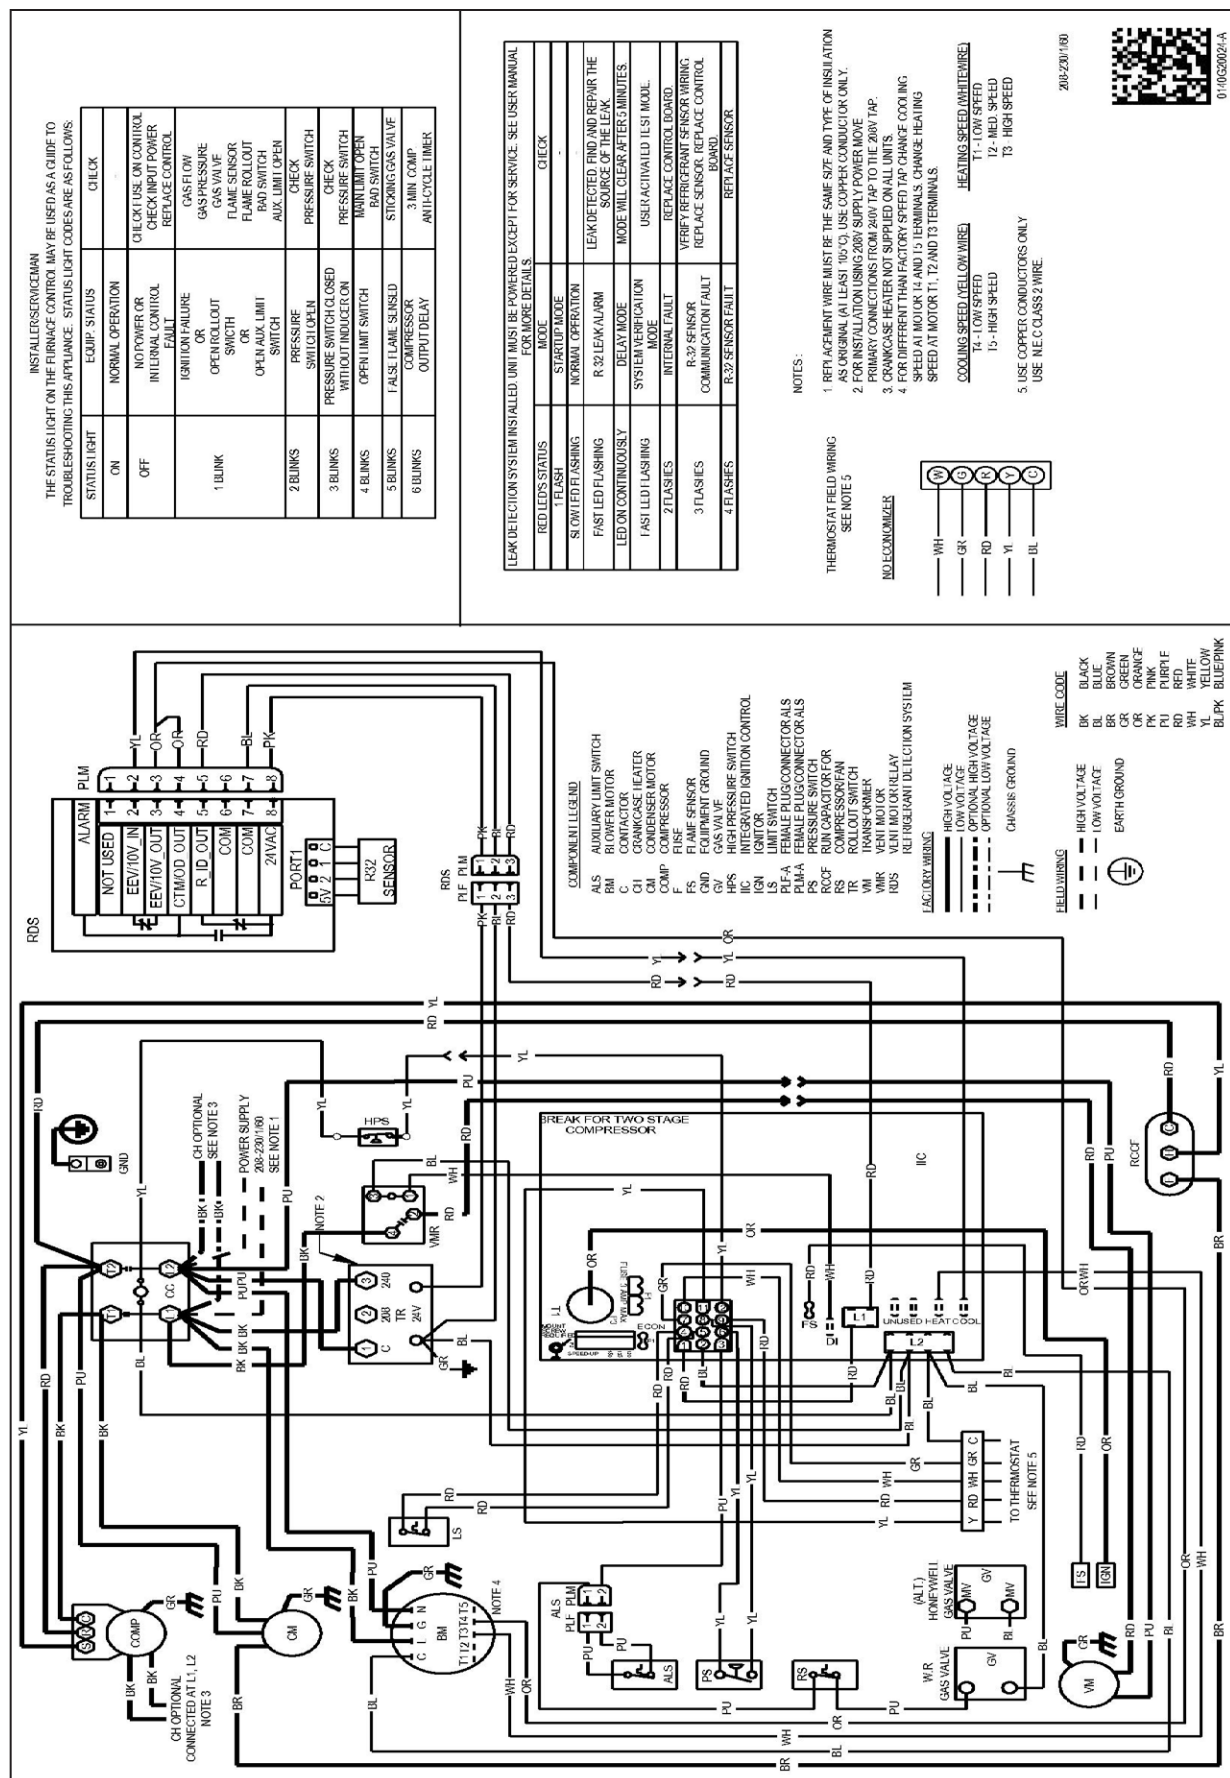

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

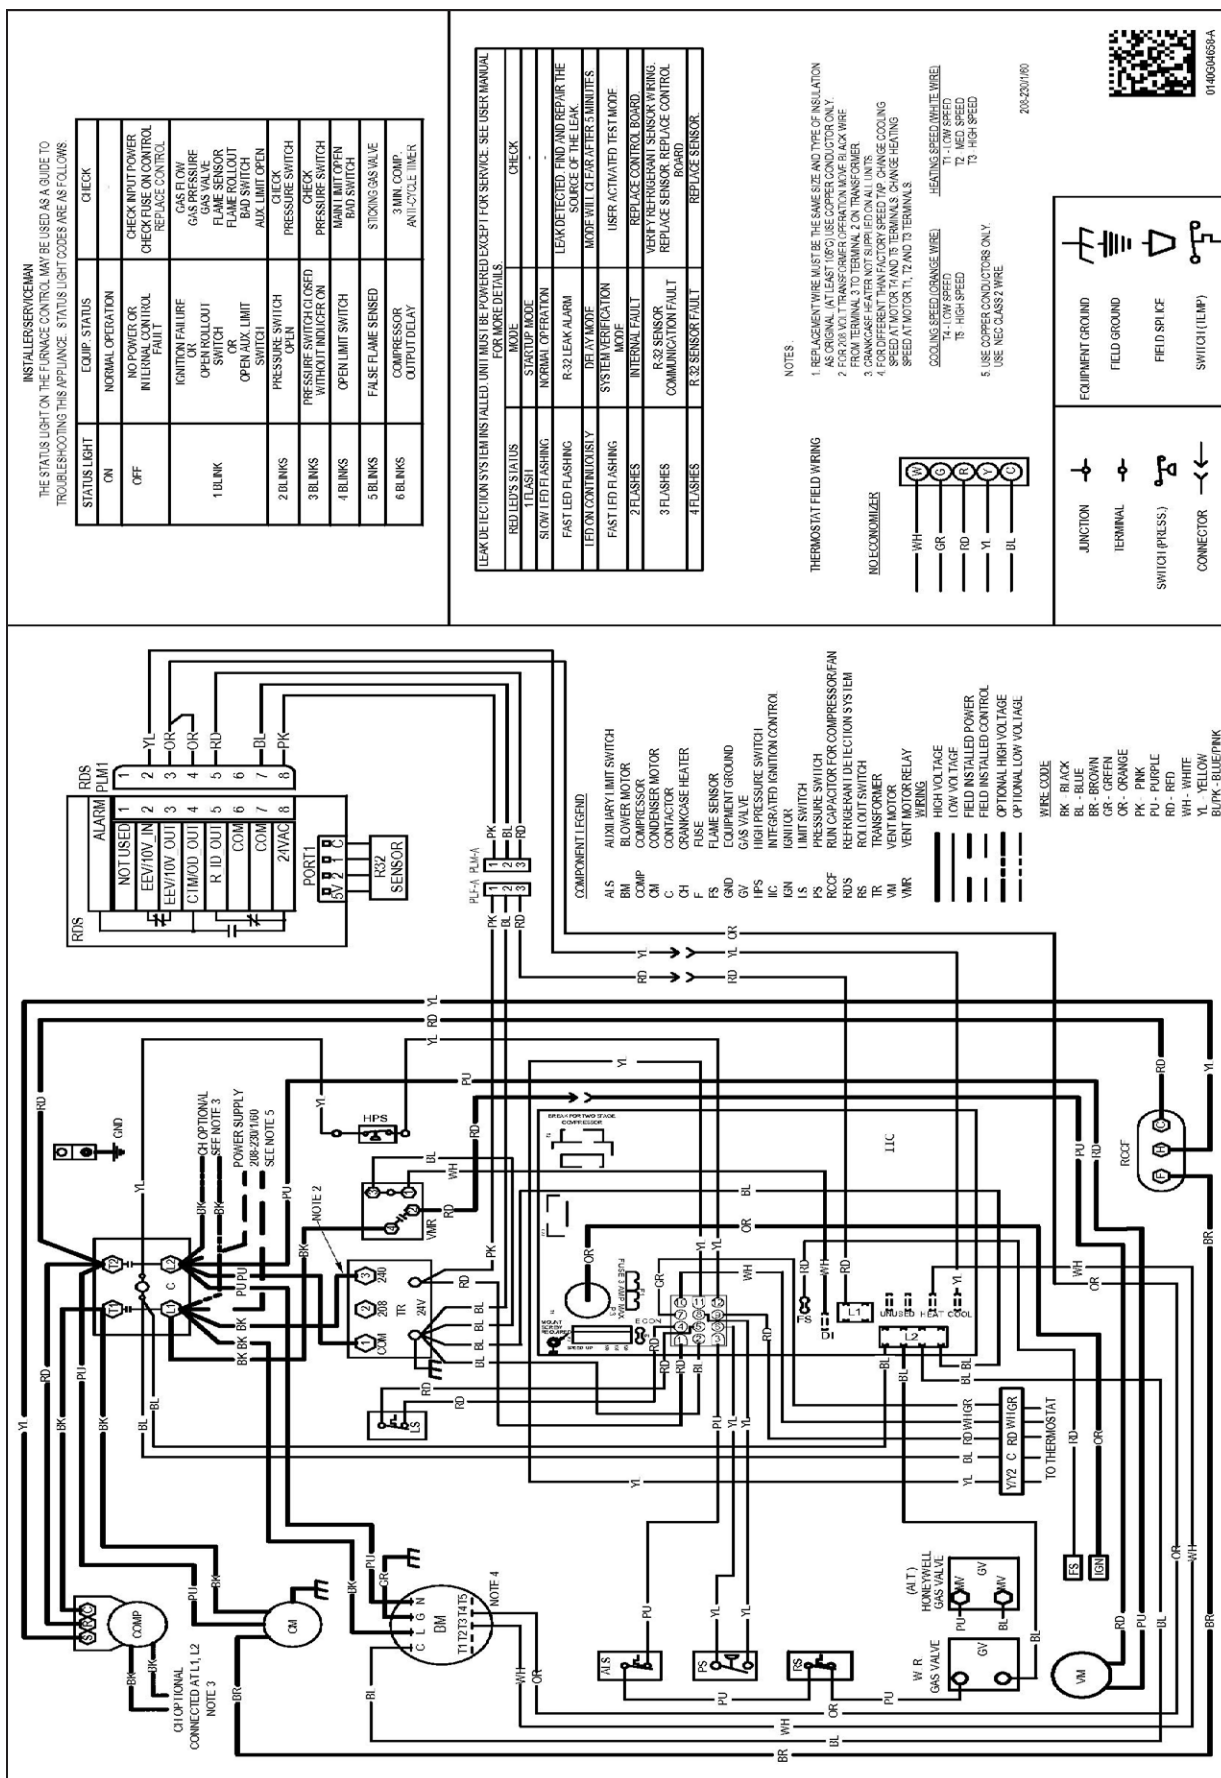

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

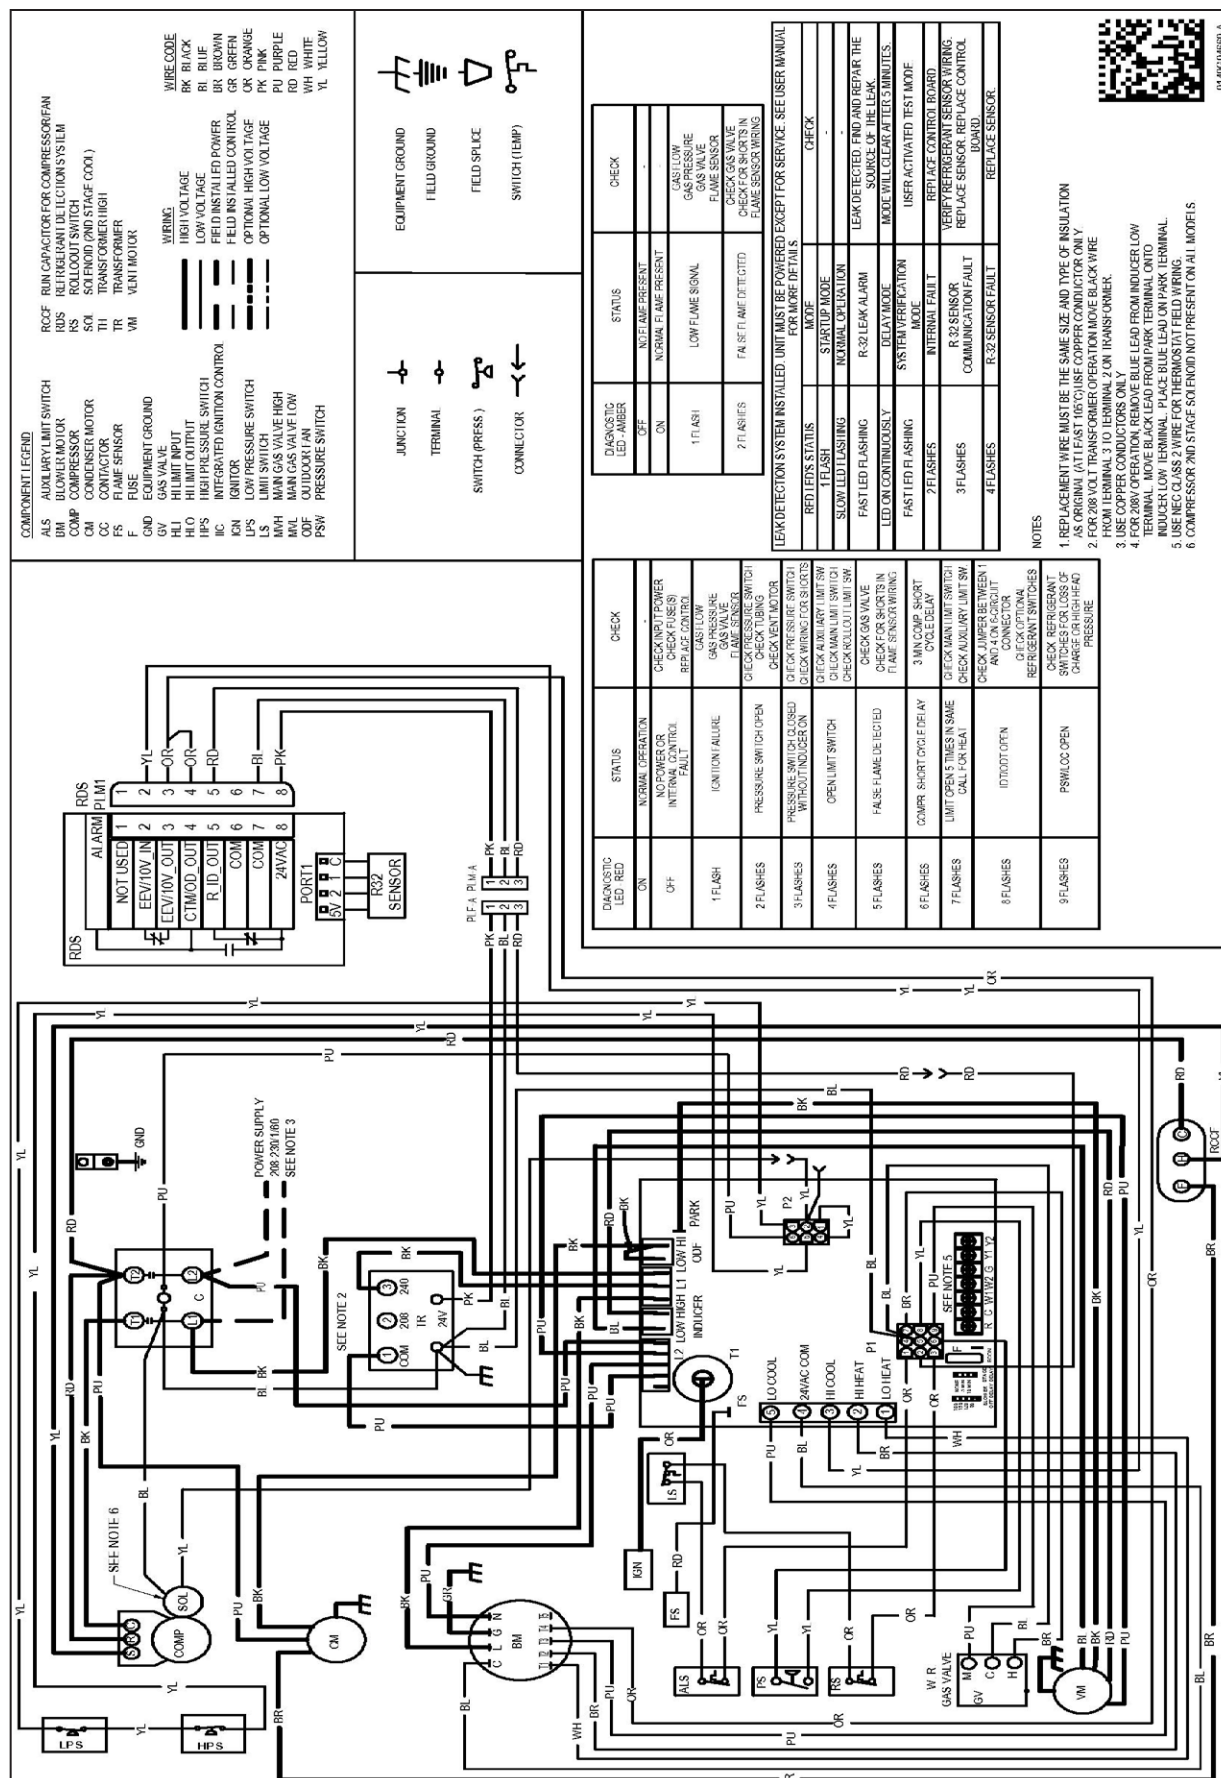

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury or death.

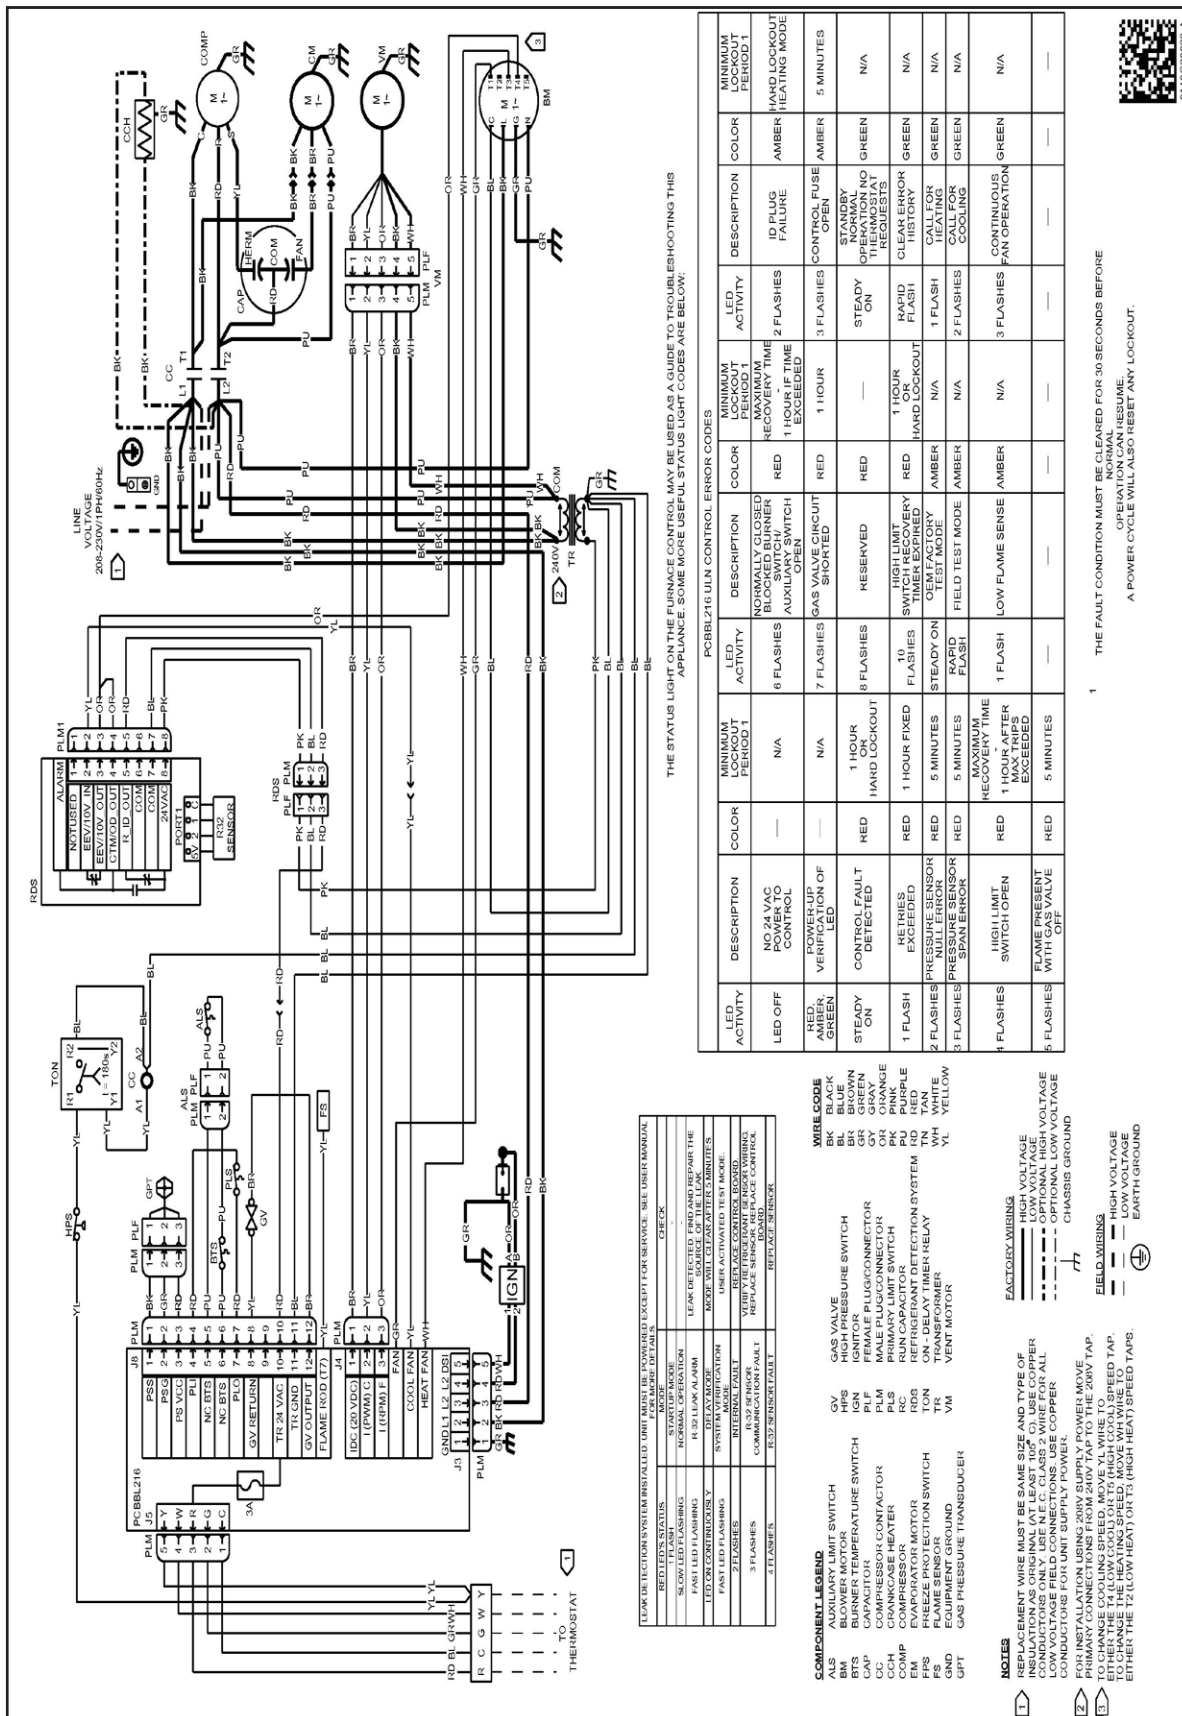

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

⚠ WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

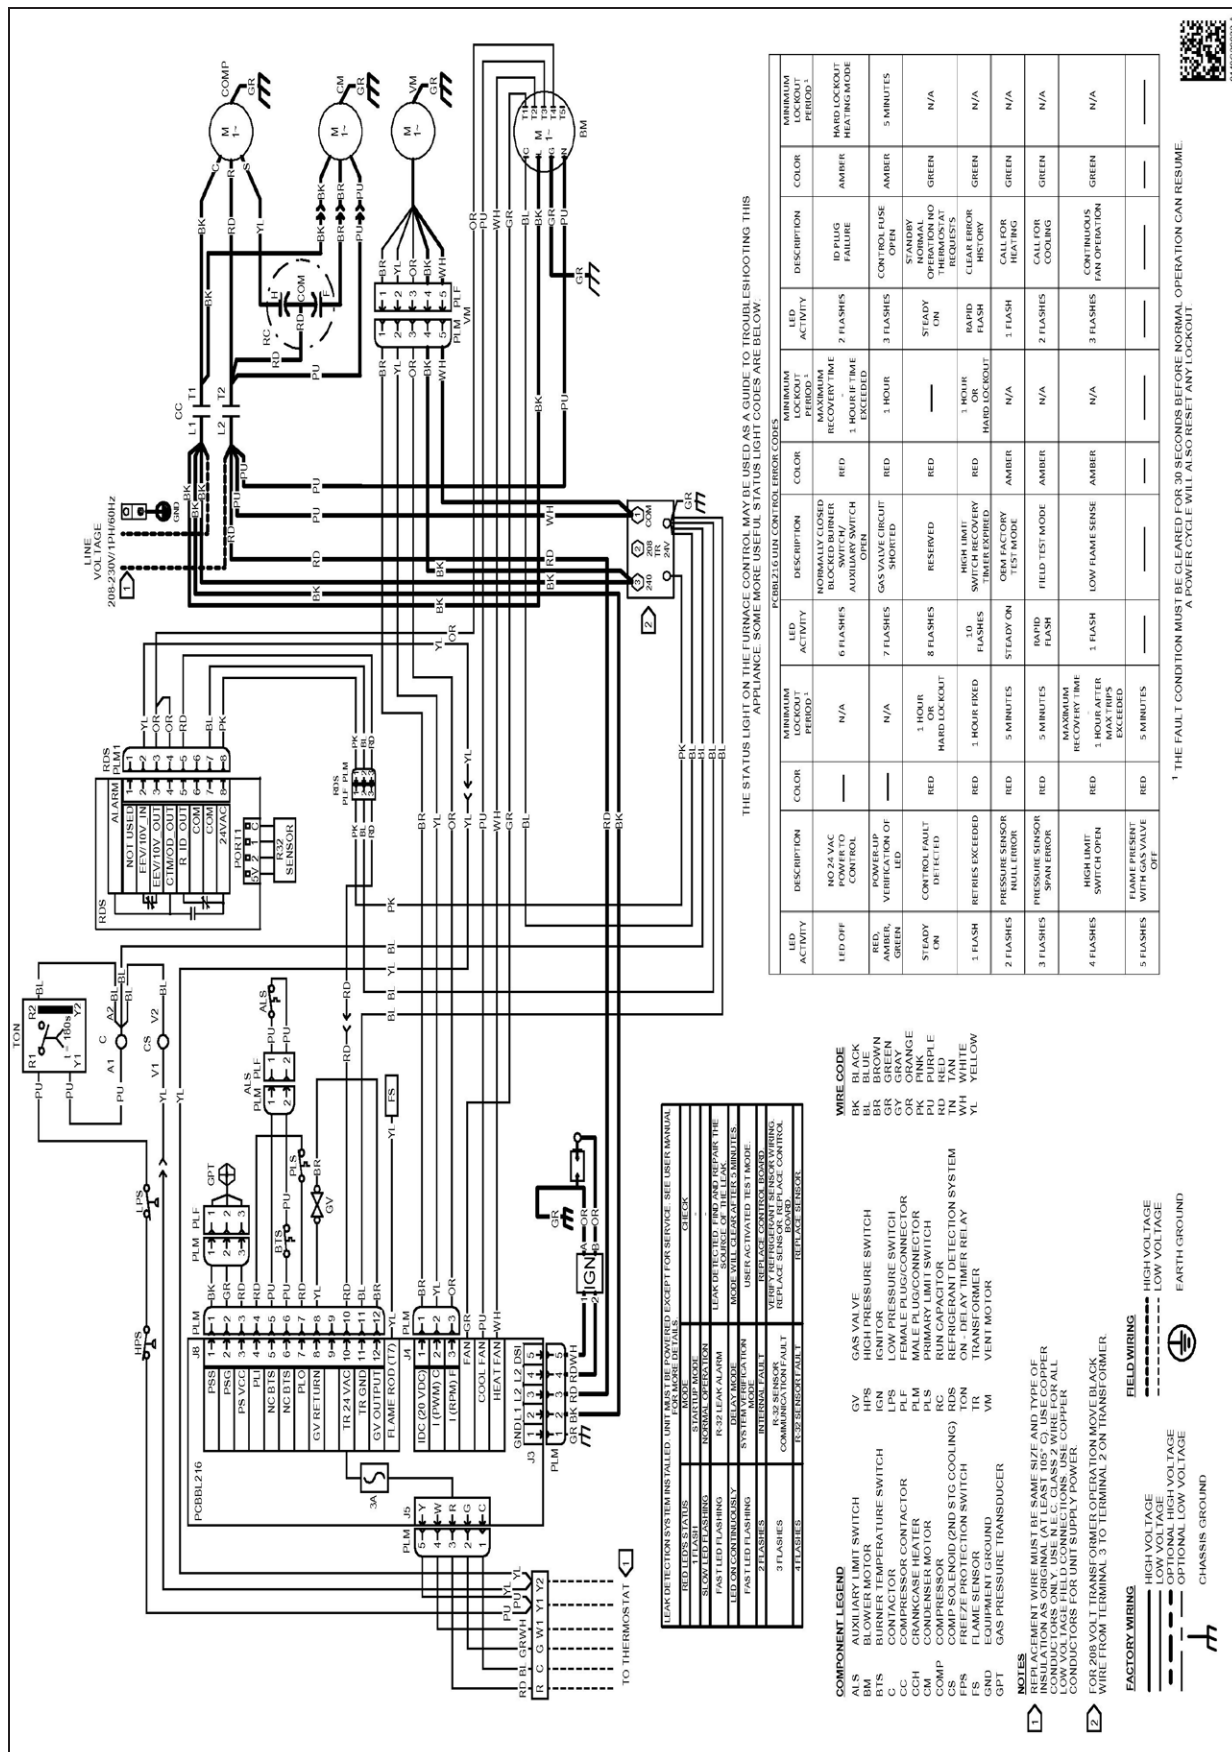

ACCESSORY DESCRIPTION	PARTS NUMBERS	
	MEDIUM CHASSIS	LARGE CHASSIS
Concentric Kit	CDK36	CDK4872
Downflow Economizer	PGEDJ101/102	PGEDJ103
Downflow Internal Filter Rack (with economizer)	DDNIFRPGMM	N/A (built into economizer)
Downflow Internal Filter Rack (no economizer)	DDNIFRPGA	DDNIFRPGA
Downflow Manual Damper	PGMDD101/102	PGMDD103
Downflow Motorized Damper	PGMDMD101/102	PGMDMD103
Downflow Square to Round	SQRP101/102	SQRP103
Economizer Wiring Harness (2-4 Tons)	0259G00214	0259G00214
Economizer Wiring Harness (5 Tons)	N/A	0259L00412
External Horizontal Filter Rack	DPHFRA	DPHFRA
High-Altitude Kit	HA-03	HA-03
Horizontal Duct Cover	20464501PDGK	20464502PDGK
Horizontal Economizer	DHZEENJPGCHM	DHZEENJPGCHL
Horizontal Manual Damper	PGMDH102	PGMDH103
Horizontal Motorized Damper	PGMDMH102	PGMDMH103
Horizontal Square to Round	SQRP101/102	SQRP103
Internal Horizontal Filter Rack	DHZIFRPGCHA	DHZIFRPGCHA
LP Conversion Kit (Single-Stage Models)	LPM-07	LPM-07
LP Conversion Kit (Two-Stage Models)	N/A	LPM-08
Outdoor Thermostat with Housing	OTDFPKG-01	OTDFPKG-01
Roof Curb	D14CRBPGCHMA	D14CRBPGCHMA
Roof Curb	D14CRBPGCHMA	D14CRBPGCHMA

