






SUBMITTAL DATA SHEET


ACIQ-12W-HH-MB	12,000 BTU/H(208/230V)	Wall Mounted Heat Pump System
Location: _____	Approval: _____	
Engineer: _____	Date: _____	
Submitted to: _____	Construction: _____	
Submitted by: _____	Unit #: _____	
Reference: _____	Drawing #: _____	

Indoor unit code	22022011016261	
Indoor unit model	ACIQ-12W-HH-MB	
Certified	AHRI	
	UL	



INDOOR UNIT DATA		
Indoor fan motor		
Type		Cross-Flow
Model		ZKFP-20-8-6-21
Qty		1
Input	(W)	50.0
RLA	(A)	0.25
LRA	(A)	---
Winding Resistance	(Ω)	---
Capacitor	(uF)	---
Speed(Hi/Mi/Lo)	(r/min)	1050/930/870
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (N)	(CFM)	335.29/229.41/176.47
Indoor noise level (Hi/Med/Lo)	[dB(A)]	36/33.5/22.5
Dehumidification	(Pint/H)	---
Indoor unit		
Dimension (WxDxH)	(inch)	33.40x9.18x11.76
	(mm)	848.4x233.2x298.6
Packing(WxDxH)	(inch)	36.22x12.20x14.57
	(mm)	920x310x370
Net/Gross weight	(lbs.)	22.93/28.88
	(kg)	10.4/13.1
Indoor(cooling)	(Deg. °F / °C)	Inner groove tube / Φ7
Indoor(heating)	(Deg. °F / °C)	1.3 / 21x13.37
Application area	(sq.ft)	172.22~247.57
	(m2)	16~23

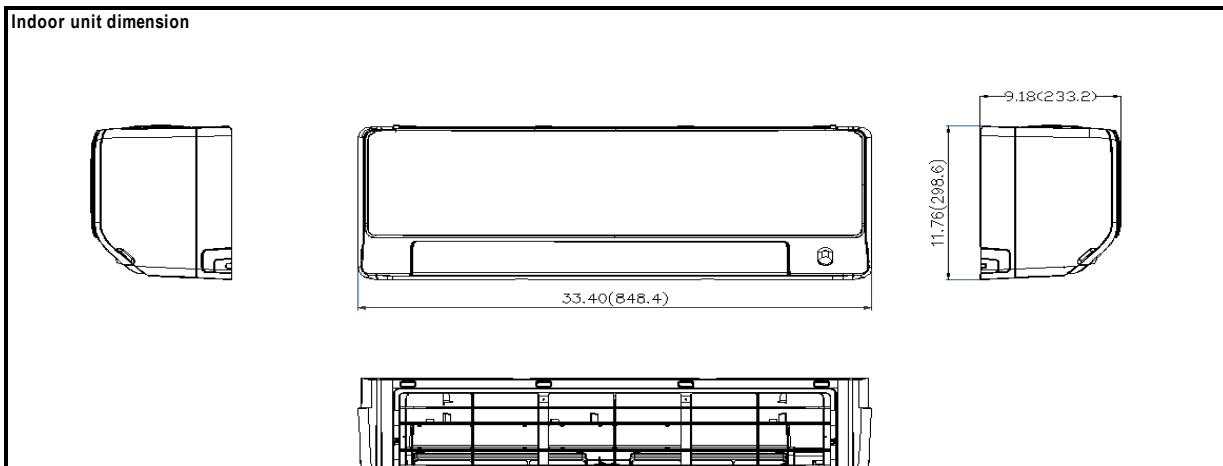

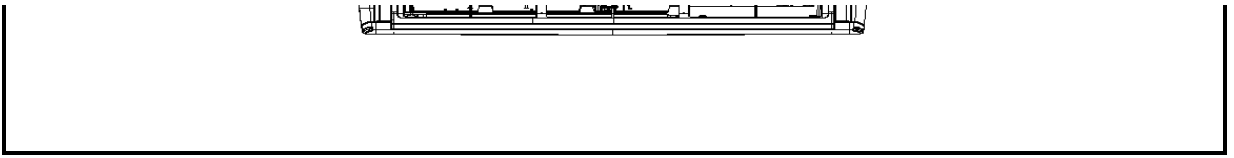

General Features

Intelligent Eye(optional)
Easy Installation
Easy Maintenance
Easy Clean
High Efficiency
Wireless Remote with LCD Display

Extended Performance Data