



DAIKIN *ENTRA*

Available with R-410A or R-32



SINGLE ZONE WALL-MOUNTED HEAT PUMP SYSTEM



18 SEER2 / UPTO 9 HSPF2 / UPTO 11 EER2

R-32 models shown above

Today, the air is perfect. Perfect temperature. Perfect humidity. Perfectly clean and fresh, like just after a rainstorm. And the only thing more perfect than this outdoor scenario is that it's all happening inside. Because that's where we work. That's where we play, where we sleep, where we truly live.

And that's why at Daikin, we aim to make the air inside as refreshing as the outside. Better comfort. Better control and efficiency. Better quality. So you can create your own unique ecosystem. And everyday is perfect.

Inside and out.



Perfecting The Air We Share

A better understanding of how people inhabit their living spaces has led to products designed to create indoor environments that help use energy resources more effectively. Heat pumps extract or reject heat from the outside air, even in cold weather. They use an electrically powered compressor and are extremely effective at

heating and cooling an apartment or a house. Daikin heat pumps are quiet and discreet, and use state-of-the-art technology to keep your energy bills low. With a Daikin heat pump, a large portion of the energy used to heat or cool your home comes from the outside air, a free and infinitely renewable resource.



Daikin *ENTRA* Single Zone Wall Mount HEAT PUMP SYSTEM

Comfort

We offer a wide range of products, and always provide you with the ideal solution, whether for an apartment, condo or a house. Our units are whisper quiet and, with their specially designed airflow pattern, they create your ideal indoor climate.

Daikin units are designed to include features that let you create your own unique ecosystem. From the wide angle louver design to the auto-swing and comfortable mode controller settings, effective heating and cooling is ensured throughout the space.

Smart inverter technology



Integrated with an inverter (variable-speed) compressor, Daikin systems deliver the capacity required to maintain desired room conditions, typically reducing energy consumption by up to 30% or more (compared to traditional fixed-speed ducted systems). This technology minimizes temperature fluctuations and provides continuous cooling and heating comfort.

Control

Our expertise makes life easier for you, allowing you to control your system via a user-friendly remote control.

Energy efficiency

Our products are designed to be highly efficient all year round, and their low energy consumption is reflected in low energy bills for you.

Reliability

Daikin products are renowned for their reliability. And you can rely on outstanding limited warranties* to match.



* Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. If product installed in a commercial application, limited warranty period is 5 years. The duration of warranty coverages in Texas differs in some cases.

Daikin *ENTRA*

Elegant and stylish wall-mounted unit providing high efficiency and comfort.

Daikin *ENTRA* single zone inverter wall-mounted systems provide energy efficiency and comfort control with an affordable, cost-saving solution. These heat pump systems feature streamlined, wall mounted indoor units paired with quietly compact outdoor units.



Efficiency and Comfort:

Energy Efficient –

Up to 18 SEER2 / Up to 9 HSPF2 / Up to 11 EER2 for efficient cooling and heating operation and reduced operating costs compared to conventional lower-efficiency systems.

Cooling Range: 50° – 115°F

Heating Range: 5° – 65°F*



Ideal solution for:

- » Renovations, remodeling and new construction
- » A perfect alternative to noisy and inefficient window or through-the-wall AC units
- » Sun rooms, basements, attics, garages, hot or cold spaces, and more
- » Rooms where floor space comes at a premium or is not available for other application
- » Ceiling void or attic does not allow for a viable duct run option

Simple and efficient:

Wall-mounted units are simple to install. The flexible design blends discretely with any home décor and is ideal for single room enhancements, spaces requiring additional heating or cooling, and additions. The air direction and flow rate are adjusted so that the air will not blow directly at people in the room.





Innovative technology:



Outdoor unit features:



Anti-Corrosion Treatment on Heat Exchanger

Indoor unit features:



Powerful Operation – Pushing the POWERFUL button on the remote control gives you a boost in cooling or heating power for a 20-minute period, even if the unit is already operating at high capacity.



ECO+ – An intelligent feature that ensures optimum energy consumption while fulfilling basic human comfort needs. Once activated, set temperature will be adjusted automatically to an optimum energy consumption level.



Blue Fin Protection – The hydrophilic coated fin ensures the condensate water moves easily to the drain pan — thus enhancing the cleanliness and lifespan of the cooling coil.



Titanium Apatite Photocatalytic Air Purifying Filter – This filter combines the air-purifying filter and titanium apatite photocatalytic deodorizing filter in a single highly effective unit.



Multi-monitor lamp

The lamp color changes according to the mode of operation.



Knowledge is power

The new minimum efficiency standards are based upon new metrics (SEER2/EER2/HSPF2) derived from a new test procedure (M1) rather than the historical metrics (SEER/EER/HSPF) from the old test procedure (M). Testing procedures and requirements for developing efficiency ratings will now be more stringent with the new 2023 DOE regulations. The prior M testing procedure is being replaced by the M1 testing procedure for 2023 compliance.

Up to 18 SEER2	Up to 11 EER2
Up to 9 HSPF2	Up to 3.56 COP

(Coefficient of Performance)

Single Zone Heat Pump
Efficiency ratings

Why is COP important?

The COP of a heat pump is the ratio of:
 $COP = \frac{\text{energy out}}{\text{energy in}}$

When the COP is >1, the result is a system providing more heating energy than energy consumed. As the COP2 increases, the higher the efficiency — resulting in lower utility costs.

COP




ENTRA
Up to **3.56**
(Wall Mount Unit)



Take comfort in your decision.

R-410A INDOOR AND OUTDOOR UNITS

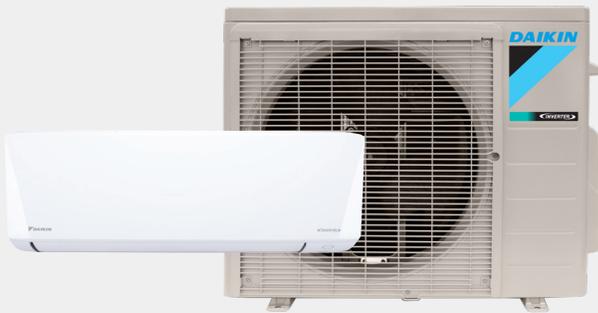


NEW R-32 INDOOR AND OUTDOOR UNITS



Comfort without compromise:

The Daikin *ENTRA* system is an Inverter unit that runs continuously but adjusts the compressor's speed to meet the demand. An inverter is energy saving technology that eliminates wasted operation in air conditioners by efficiently controlling motor speed. Because it maintains the temperature consistently, your space will no longer feel too hot or too cold. Compared to non-inverter type HVAC systems, systems equipped with inverters have less power loss and can save up to 30% or more in energy.

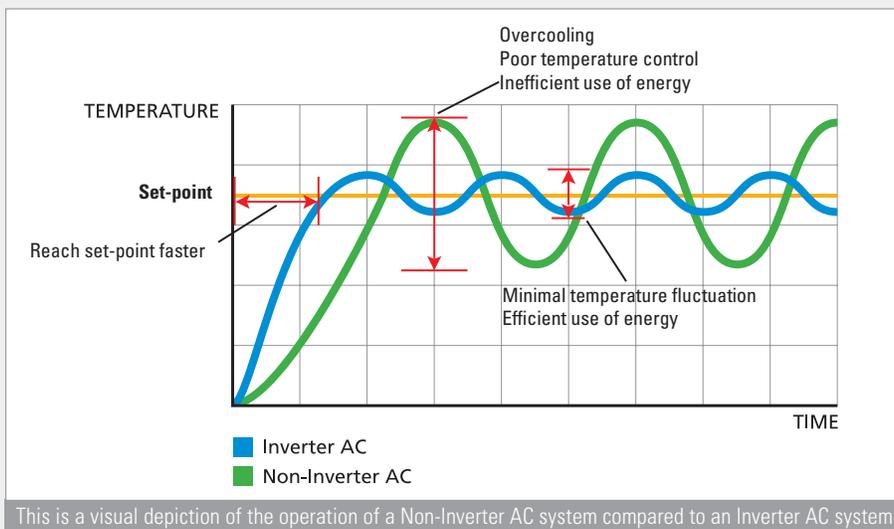

Learn more about the benefits of Daikin Inverter technology:

www.daikincomfort.com/go/inverter/



R32

The right choice
to replace
R-410A.

Proven. Easy. Available. Efficient.

With **over 230 million R-32 units already installed**, made by **over 40 manufacturers** and installed in **more than 130 countries**, R-32 is the right choice **and** the proven global standard.

In addition, R-32 is the only pure, single-component refrigerant slated to replace the high GWP refrigerant, R-410A. Unlike blended refrigerants, which can change composition, R-32 is easy to top off or clean and reuse on-site. It's also easy to reclaim and reuse off-site with a simple cleaning process.

Additionally, because R-32 has a GWP of 675 and requires less charge in certain systems, direct emissions from those systems can be up to 80% lower than similar R-410A systems. The result? Fewer greenhouse gas emissions that contribute to climate change, based on Daikin studies.

Daikin is leading the industry with the switch to the next generation of refrigerants that have a lower Global Warming Potential (GWP) than R-410A: R-32.



Aligning with Goals of:

- » **Decarbonization and Electrification — moving towards clean energy:** An effective source of heat to comfortably offset older or inefficient sources of heat using fossil fuels.
- » **Lower GWP refrigerant — reduce emissions at the source:** Utilizing a refrigerant with lower Global Warming Potential (GWP) compared to conventional refrigerants.
- » **Sustainability:** Easy to top off, or clean and reuse on-site and easy to reclaim and recycle.



LEARN MORE ABOUT R-32 AT
WWW.R32REASONS.COM



Controls



Daikin DKN Plus Interface

The Daikin DKN Plus Interface (AZAI6WSPDKC) enables the energy-efficient control of Daikin air conditioners by a third-party thermostat or an automation system. With this interface, third-party devices or systems can control the Single zone and Multi-zone indoor units through the DKN NA App, Cloud API, Modbus®, BACnet™ MS/TP, or thermostat relay contacts. This interface can be commissioned easily through the DKN Cloud NA app via Bluetooth® Low Energy (BLE). Learn more at www.daikinac.com.



Daikin One+ Smart Thermostat

The Daikin *One+* smart thermostat is available for single and multi-zone indoor unit models. With the new translation adaptor, connecting the Daikin *One+* smart thermostat provides several user features including remote monitoring, control and geofencing using the Daikin *One* home app, *Google*, and *Amazon* voice assistants. Learn more at www.daikinone.com.



For systems compatible with Daikin *One* smart thermostats:

Once you grant your Daikin contractor access through Daikin *One* cloud services app, the Daikin cloud can notify your contractor when your system needs maintenance, alert them if your system ever has an urgent need, and provide detailed performance information on your system. The first year of Daikin *One* cloud services is included with purchase. Ask your Daikin contractor for more information!



Daikin *One* Touch Smart Thermostat

A great control option for Daikin single and multi-zone systems. With customizable settings and the power to wirelessly control the system from anywhere, homeowners may never want to change their thermostat manually again. However, the touchscreen interface supports a user-friendly experience when they do. Voice control is also possible with compatible Amazon and Google devices.



Daikin *One* Lite Connected Thermostat

The Daikin *One* lite connected thermostat is a perfect solution for most Daikin single and multi-zone products when a wall-mounted smart thermostat is needed. The Daikin *One* lite connected thermostat can be linked via Wi-Fi to the Daikin *One* home app for control from an iOS or Android phone or tablet.



NOTE: the handheld remote that comes with some indoor units *should not* be used together with the Daikin *One* thermostats.



Daikin *SplitXpress* Selection Tool

The new interactive *SplitXpress* mobile app and website provide a complete product selection tool to streamline system selection for single and multi-zone projects. Users can create equipment selections and add accessories / pricing details to quickly share quotes with customers. Available for free on the *App Store* (iOS) and *Google Play* (Android), and at <https://splitxpress.daikincity.com>.



Specifications: R-410A Models

Heat Pump Specifications

Unit Size	Indoor Unit Model # / Dimensions (H x W x D)	Outdoor Unit Model # / Dimensions (H x W x D)	Efficiency Rating	Lowest Sound Level (dB(A))		Weight (lbs)		AHRI #
				Indoor*	Outdoor	Indoor	Outdoor	
9,000	FTXB09BXVJU	RXB09BXVJU	18 SEER2 / 11 EER2 / 9 HSPF2 / 3.56 COP	19	46	20	55	211291635
	11-1/3 x 30-5/16 x 9-3/16	21-11/16 x 26-1/2 x 11-3/16						
12,000	FTXB12BXVJU	RXB12BXVJU	18 SEER2 / 8.5 EER2 / 9 HSPF2 / 3.3 COP	19	48	21	62	211291636
	11-1/3 x 30-5/16 x 9-3/16	21-11/16 x 26-1/2 x 11-3/16						
18,000	FTXB18AXVJU	RXB18AXVJU	18 SEER2 / 10.5 EER2 / 8.5 HSPF2 / 3.3 COP	33	53	31	97	211291637
	11-11/16 x 39-9/16 x 10-3/4	27-13/32 x 36-5/8 x 13-13/16						
24,000	FTXB24AXVJU	RXB24AXVJU	18 SEER2 / 11 EER2 / 8.5 HSPF2 / 3.52 COP	34	53	31	97	211291638
	11-11/16 x 39-9/16 x 10-3/4	27-13/32 x 36-5/8 x 13-13/16						

*When quiet operation is engaged

Specifications: R-32 Models



Heat Pump Specifications

Unit Size	Indoor Unit Model # / Dimensions (H x W x D)	Outdoor Unit Model # / Dimensions (H x W x D)	Efficiency Rating	Lowest Sound Level (dB(A))		Weight (lbs)		AHRI #
				Indoor*	Outdoor	Indoor	Outdoor	
9,000	FTXC09AXVJU	RXC09AXVJU	18 SEER2 / 11 EER2 / 9 HSPF2 / 3.6 COP	19	46	20	60	213895727
	1-1/3 x 30-5/16 x 9-11/16	21-11/16 x 26-1/2 x 11-3/16						
12,000	FTXC12AXVJU	RXC12AXVJU	18 SEER2 / 8.5 EER2 / 9 HSPF2 / 3.3 COP	19	48	21	60	213895723
	1-1/3 x 30-5/16 x 9-11/16	21-11/16 x 26-1/2 x 11-3/16						
18,000	FTXC18AXVJU	RXC18AXVJU	18 SEER2 / 10.5 EER2 / 9 HSPF2 / 3.3 COP	33	53	31	101	213895724
	11-11/16 x 39-9/16 x 11-1/3	27-13/32 x 36-5/8 x 13-13/16						
24,000	FTXC24AXVJU	RXC24AXVJU	18 SEER2 / 10.5 EER2 / 9 HSPF2 / 3.4 COP	34	52	31	101	213895725
	11-11/16 x 39-9/16 x 11-1/3	27-13/32 x 36-5/8 x 13-13/16						

*When quiet operation is engaged



BUILD YOUR SYSTEM | DISCOVER REBATES | FIND A CONTRACTOR | LEARN ABOUT FINANCING & MORE:

www.daikincomfort.com



About Daikin:

Daikin Industries, Ltd. (DIL) is a global Fortune 1000 company and is recognized as one of the largest HVAC (Heating, Ventilation, Air Conditioning) manufacturers in the world. Founded in 1924, Daikin is celebrating 100 years of HVAC worldwide leadership. DIL is primarily engaged in developing indoor comfort systems and refrigeration products for residential, commercial, and industrial applications. Its consistent success is derived, in part, from a focus on innovative, energy-efficient, and premium quality indoor climate and comfort management solutions.



WARNINGS:

- » Always use a licensed installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
- » Use only those parts and accessories supplied or specified by Daikin. Ask a licensed contractor to install those parts and accessories. Use of unauthorized parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- » Read the User's Manual carefully before using this product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.
- » For any inquiries, contact your local Daikin sales office.
- » Working with all refrigerants involves a degree of liability. It is recommended to use best practices and always adhere to safety protocols before, and during, work with any refrigerants.
- » **DO NOT MIX REFRIGERANTS**
- » A2L refrigerants can only be used in new equipment.
- » A2L refrigerants **CANNOT** be used as a retrofit refrigerant.
- » Codes are rapidly changing and allowing A2L refrigerants throughout North America. Check with your local Daikin Distributor for latest product availability information.

App Store is a registered trademark of Apple Inc.

Google Play and the Google Play logo are trademarks of Google LLC.

ADDITIONAL INFORMATION

Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer.



www.R32reasons.com

