Fan Catalogue 2021/2022






Wherever you are, we are.

At Mercator, we want to put the power in your hands. Using our online tools, you can get the information you need whenever you need it and from wherever you are. We are at your side 24/7, offering you inspirational, relevant and helpful digital resources that can be easily accessed from your computer, phone or tablet.

Check out these tools on our website.

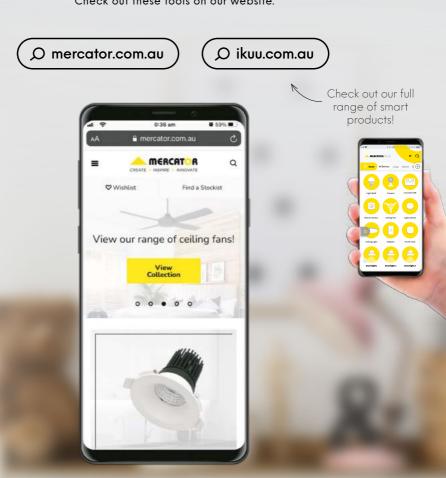



DC Ceiling Fans









- Ceiling to fan base: 340mm
- Slope to max. 12°
- CEILING FAN FEATURES
- · 152cm ceiling fans
- · Corrosion resistant ABS fan blades
- · Ideal bedroom fan with quieter operation
- · Reversible airflow for summer and winter use
- · Metal body with ABS blades
- Suitable for indoor installation

- Stated dimensions with 128mm rod supplied Longer rods available
- Sleek white 6-speed remote controller included
- · Dimmable
- · Dual control modes for LED colour change
- 1H/4H/8H fan off timer
- Light setting memory
- Easy pairing (up to 4 handsets per receiver)

CEILING FAN SPECIFICATIONS

02/2/1/4 17/1/ 0/ 20/1/07/10					
MODEL	FC1120143 (WITHOUT LIGHT)	FC1128143 (WITH LED)			
BLADE SWEEP	152cm	152cm			
MOTOR POWER	35W	35W			
Max. AIRFLOW	16,360 m3/h	16,360 m3/h			
FAN LIGHT	-	18W dimmable integrated LED			
LIGHT CONTROL	-	4-step colour change or smooth transitional colour change between warm white and daylight white			
LIGHT COLOUR	-	3000K	3500K	4000K	4500K
LIGHT OUTPUT	-	1100lm	1200lm	1200lm	1200lm
CONTROLLER	Remote control	Remote cor	ntrol		

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)
BLACK	FD360600BK + XFC8283	FD360900BK+ XFC8284
WHITE	FD360600WH + XFC8283	FD360900WH+ XFC8284

CARDIFF 52" DC CEILING FAN





Brushed Chrome & Silver Finish

White







CEILING FAN DIMENSIONS

- Ceiling to fan base: (B22) 415mm | (NL) 355mm
- Slope to max. 21°

• Stated dimensions with 152mm rod supplied Longer rods available

CEILING FAN FEATURES

- 130cm ceiling fans
- · Reversible airflow for summer and winter use
- · Tropically rated
- · Metal body with plywood blades
- · Suitable for indoor installation

- 5-speed remote controller (FRM121) included
- 1H/4H/8H fan timer
- · Available with or without fitted B22 light
- · Easy installation with quick connect wiring

CEILING FAN SPECIFICATIONS

MODEL	FC650134R (WITHOUT LIGHT)	FC652134R (WITH B22)
BLADE SWEEP	130cm	130cm
MOTOR POWER	35W	35W
Max. AIRFLOW	8,359 m³/h	8,359 m³/h
FAN LIGHT	-	Suits two max. 15W B22 globes
LIGHT COLOUR	-	(not included) Max. globe dimension: L110mm x Max. W55mm
LIGHT OUTPUT	-	L110mm x Max. W55mm
CONTROLLER	Remote control	Remote control

FAN COLOUR	60CM EXTENSION ROD (FD) INCLUDING WIRING LOOM	90CM EXTENSION ROD (FD) INCLUDING WIRING LOOM
BLACK	FD652600BK	FD652900BK
BRUSHED CHROME	FD652600BC	FD652900BC
WHITE	FD652600WH	FD652900WH











- Ceiling to fan base: (LED) 340mm | (NL) 310mm
- Slope to max. 21°

• Stated dimensions with 150mm rod supplied Longer rods available

CEILING FAN FEATURES

- 137cm ceiling fans
- · Reversible airflow for summer and winter use
- · Tropically rated
- Corrosion and UV resistant moulded ABS body and blades
- Suitable for indoor or enclosed outdoor installation
- 5-speed remote controller (FRM123) included
- · Available with or without colour changing LED light
- 1H/4H/8H fan and light off timer
- · Easy installation with quick connect wiring

CEILING FAN SPECIFICATIONS

MODEL	FC700134 (WITHOUT LIGHT)	FC708134 (WITH LED)			
BLADE SWEEP	137cm	137cm			
MOTOR POWER	35W	35W			
Max. AIRFLOW	10,228 m ³ /h	10,228 m³/h	ı		
FAN LIGHT	-	18W dimma	ble integrate	d LED	
LIGHT CONTROL	-	4-step colour change or smooth transitional colou change between warm white and daylight white		tional colour light white	
LIGHT COLOUR	-	3000K	4000K	5000K	5700K
LIGHT OUTPUT	-	1000lm	1000lm	1000lm	1000lm
CONTROLLER	Remote control	Remote control			

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)
BLACK	FD360600BK + XFC7003	FD360900BK + XFC7004
WHITE	FD360600WH + XFC7003	FD360900WH + XFC7004

EAGLE 56" DC CEILING FAN

FC360143 / FC368143



- Graphite & Graphite Finish
- Oil-rubbed Bronze & Timber-Look Finish

White







CEILING FAN DIMENSIONS

- · Ceiling to fan base: (LED) 368mm | (NL) 311mm
- · Slope to max. 13° (with 127mm rod) or max. 21° (with min. 600mm rod)

• Stated dimensions with 127mm rod supplied Longer rods available

CEILING FAN FEATURES

- · 142cm ceiling fans
- · Uniquely shaped design for stronger airflow
- · Reversible airflow for summer and winter use
- · Tropically rated

- · Metal body with corrosion and UV resistant moulded blades
- · Suitable for indoor installation
- · 6-speed remote controller included
- · Available with or without dimmable LED light

CEILING FAN SPECIFICATIONS

MODEL	FC360143 (WITHOUT LIGHT)	FC368143 (WITH LED)
BLADE SWEEP	142cm	142cm
MOTOR POWER	35W	35W
Max. AIRFLOW	12,176 m³/h	12,176 m³/h
FAN LIGHT	-	12W dimmable integrated LED
LIGHT COLOUR	-	4000K Neutral White
LIGHT OUTPUT	-	900lm
CONTROLLER	Remote control	Remote control

60CM EXTENSION ROD (FD)	90CM EXTENSION ROD (FD)
FD360600BK	FD360900BK
FD360600BC	FD231134BC
FD360600GR	FD360900GR
FD510143RB	FD170114RB
FD360600WH	FD360900WH / FD231134WH / FD240134WH
	EXTENSION ROD (FD) FD360600BK FD360600BC FD360600GR FD510143RB

RHINO 1.8M 72" DC CEILING FAN



CEILING FAN DIMENSIONS

- Ceiling to fan base: (LED) 547mm | (NL) 506mm
- 182cm fan Slope to max. 15° (with 300mm rod) or max. 21° (with min. 460mm rod)
- Stated dimensions with 300mm rod supplied Longer rods available

CEILING FAN FEATURES

- 182cm ceiling fans
- Reversible airflow for summer and winter use
- · Tropically rated
- Metal body with aluminium blades
- Suitable for indoor or enclosed outdoor installation
- 5-speed remote controller included
- 1H/4H/8H fan timer
- · Compatible LED light kit available
- Motor assembly, blade set and light kit sold separately

CEILING FAN SPECIFICATIONS

MODEL	FC479180 + FC47918L (WITHOUT LIGHT)	FLF4781 (LIGHT KIT)
BLADE SWEEP	182cm	-
MOTOR POWER	35W	-
Max. AIRFLOW	16,836 m³/h	-
FAN LIGHT	-	20W dimmable integrated LED
LIGHT COLOUR	-	4000K
LIGHT OUTPUT	-	1050lm
CONTROLLER	Remote control	

FAN COLOUR	60CM EXTENSION ROD (FD) INCLUDING WIRING LOOM	90CM EXTENSION ROD (FD) INCLUDING WIRING LOOM	180CM EXTENSION ROD (FD) INCLUDING WIRING LOOM	240CM EXTENSION ROD (FD) INCLUDING WIRING LOOM
BRUSHED CHROME	FD476060BC	FD476090BC	FD476180BC	FD476240BC
GRAPHITE	FD476060GR	FD476090GR	FD476180GR	FD476240GR
WHITE	FD476060WH	FD476090WH	FD476180WH	FD476240WH





MERCATOR IKUÜ

- App control with scheduling and timers, scenes and automation, speed control, lighting brightness and colour control
- · App works on devices running iOS or Android, see ikuu.com.au for minimum requirements
- Fan uses your 2.4GHz WiFi network See page 59 for more

CEILING FAN DIMENSIONS

- Ceiling to fan base: (LED) 276mm | (NL) 245mm
- Slope to max, 19°

one clever app













CEILING FAN FEATURES

- · 132cm ceiling fans
- · Reversible airflow for summer and winter use
- · Tropically rated
- · Corrosion and UV resistant moulded ABS blades
- · Suitable for indoor or enclosed outdoor installation
- · 6-speed remote controller with 1H/8H/8H fan and light off timer included
- · Available with or without colour changing LED light
- · Easy installation with quick connect wiring

Longer rods available

CEILING FAN SPECIFICATIONS

MODEL	FC790133G (WITHOUT LIGHT)	FC798133G (WITH LED)			
BLADE SWEEP	132cm	132cm			
MOTOR POWER	35W	35W			
Max. AIRFLOW	9,727 m³/h	9,727 m³/h			
FAN LIGHT	-	18W dimmabl	le integrated LE	D	
LIGHT CONTROL	-	4-step colour change or smooth transitional colour change between warm white and daylight white			colour change
LIGHT COLOUR	-	2700K	4000K	5000K	6500K
LIGHT OUTPUT	-	1100lm	1150lm	1150lm	1150lm
CONTROLLER	Remote control	Remote contr	rol		

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)
WHITE	FD798600WH + XFC8583	FD798600WH + XFC8584



AC Ceiling Fans

CAPRICE 52" AC CEILING FAN

FC250128 / FC250134 / FC252128 / FC252134 / FC257134



CEILING FAN DIMENSIONS

- Ceiling to fan base: (B22 / LED) 365mm | (NL) 296mm
- Slope to max. 21°

• Stated dimensions with 114mm rod supplied Longer rods available.

CEILING FAN FEATURES

- 120cm and 132cm ceiling fans
- · Reversible airflow for summer and winter use
- Tropically rated
- · Cast aluminium body with plywood blades
- Suitable for indoor installation
- 3-speed wall controller with light switch included
- Available with or without fitted light (B22 or LED)
- Remote controller adaptable (sold separately)

CEILING FAN SPECIFICATIONS

MODEL	FC250128 (WITHOUT LIGHT)	FC250134 (WITHOUT LIGHT)	FC252128 (WITH B22)	FC252134 (WITH B22)
BLADE SWEEP	122cm	132cm	122cm	132cm
MOTOR POWER	60W	60W	60W	60W
Max. AIRFLOW	8,600 m³/h	9,100 m³/h	8,600 m ³ /h	9,100 m ³ /h
FAN LIGHT	-	-	C 11.1	1014/150 . . .
LIGHT COLOUR	-	-	Suits two B22 20W CFL or 10W LED globes (not supplied) max. globe dimension: L110mm x W55mm	
LIGHT OUTPUT	-	-		
CONTROLLER	Wall control	Wall control	Wall control	Wall control

FAN COLOUR	60CM EXTENSION ROD (FD)	90CM EXTENSION ROD (FD)	REMOTE CONTROLLER
BLACK	FD250600BK	FD250600BK	ED1407 / ED1407 /
BRUSHED STEEL	FD250600BS	FD250600BS	FRM87 / FRM97 / FRM86 (dimmer remote) / FRM86G (smart remote)
WHITE	FD250600WH	FD250600WH	rkiviood (silidii reliiole)



- Ceiling to fan base: (B22) 428mm | (NL) 335mm
- Slope to max. $23\,^\circ$

 Stated dimensions with 150mm rod supplied Longer rods available

CEILING FAN FEATURES

- · 120cm ceiling fans
- · Reversible airflow for summer and winter use
- · Tropically rated
- · Metal body with plywood blades
- · Suitable for indoor installation

- 3-speed wall controller or remote controller included
- · Available with or without fitted B22 light
- Model with light available with or without FRM86
 3-speed remote controller with dimming function

CEILING FAN SPECIFICATIONS

MODEL	FC920124 (WITHOUT LIGHT)	FC922124 (WITH LIGHT)	FC922124R (WITH LIGHT & REMOTE)	
BLADE SWEEP	120cm	120cm	120cm	
MOTOR POWER	60W	60W	60W	
Max. AIRFLOW	7,400 m³/h	7,400 m³/h	7,400 m³/h	
FAN LIGHT	-	Suits two B22 20W globes (not supplied)		
LIGHT COLOUR	-	max. globe dimension: L110mm x W55mm		
CONTROLLER	Wall control	Wall control	Remote control (FRM86)	

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	REMOTE CONTROLLER
BRUSHED CHROME	FD360600BC + XFC6403	FD360900BC + XFC6404	FRM87 / FRM97 /
WHITE	FD360600WH + XFC6403	FD360900WH + XFC6404	FRM86 (dimmer remote) / FRM86G (smart remote)



- Ceiling to fan base: (LED) 350mm | (B22) 363mm | (NL) 310mm
- Slope to max. 15°

· Stated dimensions with 150mm rod supplied Longer rods available

CEILING FAN FEATURES

- · 127cm ceiling fans
- · Reversible airflow for summer and winter use
- · Tropically rated
- · Corrosion and UV resistant moulded ABS body and blades
- · Suitable for indoor or enclosed outdoor installation
- · 3-speed wall controller included
- · Available without light, with fitted B22 light or with dimmable tri-colour LED light
- · Globe and dimmer sold separately
- Remote controller adaptable (sold separately)
- · Easy installation with quick connect wiring

CEILING FAN SPECIFICATIONS

MODEL	FC710123 (WITHOUT LIGHT)	FC712123 (B22 LIGHT)	FC777134 (WITH LED)		
BLADE SWEEP	127cm	127cm	127cm		
MOTOR POWER	65W	65W	65W		
Max. AIRFLOW	10,247 m³/h	10,247 m ³ /h	10,247 m³/h		
FAN LIGHT	-	Suits one max. 15W B22 globe (not supplied)	24W dimmable* in *dimmer sold sepa	tegrated LED rately	
LIGHT COLOUR	-	max. globe dimension: L110mm x W55mm	3000K Warm White	4000K Neutral White	5000K Daylight
LIGHT OUTPUT	-		1250lm	1450lm	1400lm
CONTROLLER	Wall control	Wall control	Wall control		

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	REMOTE CONTROLLER
BLACK	FD660600BK (loom incl.)	FD660900BK (loom incl.)	FRM87 / FRM97 /
WHITE	FD660600WH (loom incl.)	FD660900WH (loom incl.)	FRM86 (dimmer remote) / FRM86G (smart remote)



- Ceiling to fan base: (B22) 414mm | (NL) 330mm
- Slope to max. 15°

 Stated dimensions with 150mm rod supplied Longer rods available

CEILING FAN FEATURES

- 135cm ceiling fans
- Reversible airflow for summer and winter use
- · Tropically rated
- Corrosion and UV resistant moulded ABS body and blades
- · Suitable for indoor or enclosed outdoor installation
- 3-speed wall controller with light switch included

YEAR

YEAR MOTOR WARRANTY

- · Available with or without fitted B22 light
- · Globe sold separately
- Remote controller adaptable (sold separately)
- · Easy installation with quick connect wiring

CEILING FAN SPECIFICATIONS

MODEL	FC660134 (WITHOUT LIGHT)	FC662134 (B22 LIGHT)
BLADE SWEEP	135cm	135cm
MOTOR POWER	88W	88W
Max. AIRFLOW	11,340 m³/h	11,340 m³/h
FAN LIGHT	-	Suits two B22 15W globes
LIGHT COLOUR	-	(not supplied)
LIGHT OUTPUT	-	max. globe dimension: L110mm x W55mm
CONTROLLER	Wall control	Wall control

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	REMOTE CONTROLLER
BLACK	FD660600BK (loom incl.)	FD660900BK (loom incl.)	FRM86 (dimmer remote) /
WHITE	FD660600WH (loom incl.)	FD660900WH (loom incl.)	FRM86 (dimmer remote) / FRM86G (smart remote)



- Ceiling to fan base: (LED) 325mm | (NL) 336mm
- Slope to max. 18°

White

 Stated dimensions with 153mm rod supplied Longer rods available

CEILING FAN FEATURES

- 122cm ceiling fans
- Reversible airflow for summer and winter use
- Tropically rated
- Corrosion and UV resistant moulded ABS body and blades
- Suitable for indoor or enclosed outdoor installation

YEAR

YEAR MOTOR WARRANTY

- · 3-speed wall controller with light switch included
- Available with or without dimmable tri-colour LED light
- Remote controller adaptable (sold separately)

CEILING FAN SPECIFICATIONS

MODEL	FC750124 (WITHOUT LIGHT)	FC757124 (WITH LED)		
BLADE SWEEP	122cm	122cm		
MOTOR POWER	75W	75W		
Max. AIRFLOW	8,540 m³/h	8,540 m³/h		
FAN LIGHT	-	18W integrated LED		
LIGHT COLOUR	-	3000K Warm White	4000K Neutral White	5700K Daylight
LIGHT OUTPUT	-	1050lm	1250lm	1150lm
CONTROLLER	Wall control	Wall control		

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	REMOTE CONTROLLER
WHITE	FD110600WH + XFC7403	FD110900WH + XFC7404	FRM87 / FRM97 / FRM86 (dimmer remote) / FRM86G (smart remote)




Fan light sold separately



Black

Brushed Steel

White







CEILING FAN DIMENSIONS

- Ceiling fan to base: 310mm
- Slope to max. 19°

 Stated dimensions with 152mm rod supplied Longer rods available

CEILING FAN FEATURES

- · 122cm, 132cm or 142cm ceiling fans
- · Reversible airflow for summer and winter use
- · Tropically rated
- · Metal body and blades

- · Suitable for indoor installation
- 3-speed wall controller included
- · Light adaptable (sold separately)
- Remote controller adaptable (sold separately)

CEILING FAN SPECIFICATIONS

MODEL	FC010124	FC010134	FC010124
BLADE SWEEP	122cm	132cm	142cm
MOTOR POWER	80W	80W	80W
Max. AIRFLOW	9,391 m³/h	12,222 m³/h	13,551 m³/h
FAN LIGHT	Max. 2 x 15W	Max. 2 x 15W	Max. 2 x 15W
LIGHT COLOUR	-	-	-
LIGHT OUTPUT	-	-	-
CONTROLLER	Wall control	Wall control	Wall control

FAN COLOUR	60CM EXTENSION ROD (FD)	90CM EXTENSION ROD (FD)	FAN LIGHT	REMOTE CONTROLLER
BLACK	FD360600BK	FD360900BK	-	ED1407
BRUSHED CHROME	FD110600BC	FD110900BC	FLF3122BC / FLF022BCN	FRM97 FRM86 (dimmer remote) FRM86G
WHITE	FD110600WH	FD110900WH	FLF3122WH / FLF022WHN	(smart remote)

AC FAN REMOTE WITH DIMMER FRM86

- Fan ON/OFF Low/Medium/High
- Light ON/OFF/DIMMER (must be enabled)
- · Light settings memory
- · 12 month warranty
- · 3 Off timer (2H, 4H, 8H) options
- Up to 10m Radio Frequency range
- Battery included
- Fan motor: Max. 180W
- · Lighting: Max. 100W



AC FAN REMOTE FRM87

- RF-Radio frequency 433.9MHz
- Suitable for use with incandescent globes and energy saving compact fluorescent lamps
- · 12 months warranty
- · Light ON/OFF
- Fan ON/OFF Low/Medium/High
- · Fan motor: Max. 120W
- Lamps: Max. 300w (incandescent) / Max. 100W (energy saving CFL)
- 16 possible code combinations



AC FAN REMOTE FRMO7

- RF-Radio frequency 433.9MHz
- Suitable for use with incandescent globes and energy saving compact fluorescent lamps
- · 12 months warranty
- Light ON/OFF Timer
- (1H, 2H, 3H, 4H, 5H, 6H, 7H, 8H)
- Fan ON/OFF Low/Medium/High
- Fan motor: Max. 100W
- Lamps: Max. 600W
- 16 possible code combinations



SMART UNIVERSAL CEILING FAN REMOTE KIT FRM86G

<u></u>

MERCATOR IKUÜ

- App control with scheduling and timers, scenes and automation, speed control, lighting brightness and colour control
- App works on devices running iOS or Android, see ikuu.com.au for minimum requirements
- Fan uses your 2.4GHz WiFi network

See page 58 for more

- Fan ON/OFF, Low/Medium/High
- Light
- ON/OFF/DIMMER (must be enabled)
 • Light settings memory
- 12 month warranty
- 3 timer options
- Up to 10m Radio Frequency range
- · Battery included
- Fan motor: Max. 180W
- Lighting: Max. 100W



one clever app













DOMINO

BH151ESW



BlackSilverWhite

60 W EXHAUST 500 m³/hr MAX. AIR EXTRACTION





PRODUCT DETAILS

- 3 in 1 bathroom solution
- 1 x 800W R7s linear heat lamp
- 2 x 10W LED panels included (3000K 1150lm)
- High air extraction up to 500m³/hr
- · Powerful 60W ball bearing motor
- Side entry draft stopper and 1.5m, Ø150mm flexible duct included
- Wall controller with 3 switches included for separate heat, light and fan control
- Thermal cut out and overheating protection for safety
- · Cut out template included
- · Heavy duty metal housing
- 2 year warranty on heat lamp

MODEL	DESCRIPTION	
HEAT LAMP XBH1514	800W, R7S, 2500K	
WALL CONTROL FSX90263	3 Gang Switch	
DRIVER XBH1516	LED Driver	
DRAFT STOPPER XBH1512 Draft Stopper		
WALL GRILLE XBH1513	Wall Grille	
FRONT PANEL (FASCIA)	Fascia with LED	

	Model	Exhaust Fan	Heater	Light	Air Extraction	Fascia Size	Cut Out Size	Duct Outlet
•	BH151ESW	60W	R7s, 1 x 800W	2 x 10W LED Panel	500m³/hr	560 x 360mm	540 x 320mm	Ø150mm



AIRBOND DC 75cm Industrial Pedestal Fan

FF62230BK

Black

- Energy saving DC motor consumes up to 70% less energy than AC motor
- Impressive 15,600 m³/h airflow
- Long life motor and aluminium blades
- · Sturdy heavy-duty base
- · Tiltable head and height adjustable metal pole
- · Remote control included
- 19 variable speeds
- Remote controlled oscillation
- Normal / Natural / Sleep 3 operation modes
- 1-9 hour timer
- 1.8m flexible power cord with plug supplied
- · 12 month warranty









Control your climate throughout a hot summer or cold winter

Reduce Energy Costs & Increase Comfort

Reduce energy costs and increase comfort in your home with the ability to automate, set schedules and control your home wherever you may be!

Mercator Ikuü can be used to make your home smarter, or as a whole of home solution. There is something for everyone.

"fan on!"





WIFI SINGLE ADAPTOR

SPLUG02

Use the Mercator Ikuü app to turn a connected appliance, like a pedestal fan, on or off.

With an in-built power meter you can see the current and historical power usage.











MOTION SENSOR Battery

White

SMA02P

- · Detects and tracks motion
- Battery based for versatile installation locations
- · Offers historical tracking
- · Zigbee product; requires Mercator Ikuü hub







ENVIRONMENTAL SENSOR Battery

SMA03P

- · Detects and tracks temperature and humidity
- · Battery based for versatile installation locations
- · Offers historical tracking
- · Zigbee product; requires Mercator Ikuü hub









SMART UNIVERSAL CEILING FAN REMOTE KIT

FRM86G

- Compatible with AC ceiling fans
- · Adjust fan speed
- · Turn fan light on or off
- Timers
- · Includes receiver

See page 42 for details















ANOVA 52" SMART DC CEILING FAN

FC1148WHWIFI/BKWIFI

See page 8-9 for details
















Distributed by:

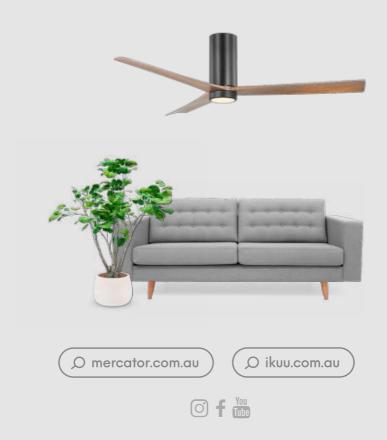

All items shown are available at time of printing and are available until sold out. All lights & fans other than do-it-yourself models must be installed by a qualified electrician. Products marked with globe/tube to suit product. Colours shown may vary slightly from actual product. Mercator reserves the right to correct any errors at any time.

Why choose Mercator Fans?

At Mercator, we are dedicated to providing any homeowner the luxury of selecting the right appliances for them, to suit their interior design and unique lifestyle.


Browse our collections of stylish and space-saving ceiling fans, practical and efficient wall-mounted fans, and convenient remote control fans so you can control your climate with the touch of a button.

- High quality
- · High performance
- · Sizes to suit every room
- · Low cost operation
- Saves energy
- Whisper quiet operation
- · Complete range
- · Stylish design



55 Years of Elegant Fan & Lighting Solutions

DC Ceiling Fans





REASONS FOR CHOOSING A DC CEILING FAN:

- More energy efficient that comparable AC fans
- Can be much quieter than comparable AC fans
- More speeds and fan/light control via remote handset
- Typically weigh less than an AC fan (easier to handle and install)
- Smart fan option available

See pages 8-9, 24-25, and 58-59







MERCATOR IKUÜ

- App control with scheduling and timers, scenes and automation, speed control, lighting brightness and colour control
- App works on devices running iOS or Android, see ikuu.com.au for minimum requirements
- Fan uses your 2.4GHz WiFi network See page 58 for more

CEILING FAN DIMENSIONS

- Ceiling to fan base: (LED) 370mm | (NL) 335mm
- Slope to max. 15°

one clever app











alexa

Stated dimensions with 152mm rod supplied

CEILING FAN FEATURES

- 132cm ceiling fans
- · Reversible airflow for summer and winter use
- Tropically rated
- · ABS non rusting fan body and blades

- Longer rods available
- Suitable for indoor, and covered outdoor installation
 Available with or without colour changing LED light
- · Easy installation with quick connect wiring

CEILING FAN SPECIFICATIONS

MODEL	FC1140WHWIFI/BKWIFI (WITHOUT LIGHT)	FC1148BKV	VIFI/WHWIFI	(WITH LED)	
BLADE SWEEP	132cm	132cm			
MOTOR POWER	35W	35W			
Max. AIRFLOW	10,552m3/h	10,552m3/	h		
FAN LIGHT	-	20W dimm	able integrat	ed LED	
LIGHT CONTROL	-	4-step colour change or smooth transitional color change between warm white and daylight white		itional colour ylight white	
LIGHT COLOUR	-	3000K	4000K	5000K	6500K
LIGHT OUTPUT	-	1200lm	1200lm	1200lm	1200lm
CONTROLLER	Remote control	Remote control			

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)
BLACK	FD360600BK + XFC8283	FD360600BK + XFC8284
WHITE	FD360600WH + XFC8283	FD360900WH + XFC8284



- Ceiling to fan base: 273mm
- Slope to max. 15°

 Stated dimensions with 128mm rod supplied Longer rods available

CEILING FAN FEATURES

- 142cm ceiling fans
- · Coastal friendly, corrosion resistant parts
- · Reversible airflow for summer and winter use
- · ABS body and blades
- · IP55 rated fan for indoor and outdoor use

- Sleek black 6-speed remote controller included
- 1H/4H/8H fan off timer
- · Light setting memory
- Easy pairing (up to 4 handsets per receiver)

CEILING FAN SPECIFICATIONS

MODEL	FC1110143BK
BLADE SWEEP	142cm
MOTOR POWER	35W
Max. AIRFLOW	10,330 m3/h
CONTROLLER	Remote control

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)
BLACK & DARK TIMBER FINISH	FD360600BK + XFC11103	FD360900BK+ XFC11104

JUNO 56" DC CEILING FAN















CEILING FAN DIMENSIONS

- · Ceiling to fan base: 354mm
- Slope to max. 12°
- · Stated dimensions with 128mm rod supplied Longer rods available

CEILING FAN FEATURES

- · 137cm ceiling fans
- · Coastal friendly, corrosion and UV resistant parts
- · Ideal bedroom fan with quieter operation
- · Reversible airflow for summer and winter use
- · ABS body with ABS blades
- Suitable for indoor and covered outdoor installation
- Sleek white 6-speed remote controller included
- Dimmable
- · Dual control modes for LED colour change
- 1H/4H/8H fan off timer
- · Light setting memory
- Easy pairing (up to 4 handsets per receiver)

CEILING FAN SPECIFICATIONS

MODEL	FC1120143 (WITHOUT LIGHT)	FC1128143 (WITH LED)			
BLADE SWEEP	137cm	137cm			
MOTOR POWER	35W	35W			
Max. AIRFLOW	12,995 m3/h	12,995 m3/	'h		
FAN LIGHT	-	18W dimmo	ıble integrate	d LED	
LIGHT CONTROL	-	4-step colo change be	4-step colour change or smooth transitional colour change between warm white and daylight white		
LIGHT COLOUR	-	3000K	3500K	4500K	5000K
LIGHT OUTPUT	-	1200lm	1250lm	1250lm	1300lm
CONTROLLER	Remote control	Remote co	ntrol		

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)
BLACK	FD360600BK + XFC8283	FD360900BK+ XFC8284
WHITE	FD360600WH + XFC8283	FD360900WH + XFC8283



CEILING FAN DIMENSIONS

· Ceiling to fan base: 314mm

CEILING FAN FEATURES

- · 132cm ceiling fans
- · Ideal bedroom fan with quieter operation
- Reversible airflow for summer and winter use
- Metal body with ABS blades
- · Suitable for indoor installation
- Sleek white 6-speed remote controller included
- Dimmable
- Dual control modes for LED colour change
- 1H/4H/8H fan off timer
- · Light setting memory
- Easy pairing (up to 4 handsets per receiver)
- · Easy installation with quick connect wiring and fittings

CELLING FAN SPECIFICATIONS

CLILING I AN 31	CEILING TAN SI ECII ICATIONS				
MODEL	FC780133 (WITHOUT LIGHT)	FLF4781 (LIGHT KIT)			
BLADE SWEEP	132cm	-			
MOTOR POWER	35W	-			
Max. AIRFLOW	9348 m3/h	-			
FAN LIGHT	-	20W dimmo	able integrate	d LED	
LIGHT CONTROL	-	4-step colo change bet	ur change or : ween warm w	smooth transit hite and day	tional colour light white
LIGHT COLOUR	-	3000K	4000K	5000K	5700K
LIGHT OUTPUT	-	1000lm	1000lm	1000lm	1000lm
CONTROLLER	Remote control	Remote cor	ntrol		

FAN COLOUR	LIGHT KIT
BLACK FC780133BK	FLF7881BK
WHITE FC780133WW	FLF7881WW

CARDIFF LED 52" DC CEILING FAN

FC658134R











CEILING FAN DIMENSIONS

- Ceiling to fan base: 415mm
- Slope to max. 21°

• Stated dimensions with 152mm rod supplied Longer rods available

CEILING FAN FEATURES

- 130cm ceiling fans
- · Reversible airflow for summer and winter use
- · Tropically rated
- · Metal body with plywood blades

- Suitable for indoor installation
- 6-speed remote controller (FRM122) included
- 1H/4H/8H fan timer
- · Easy installation with quick connect wiring

CEILING FAN SPECIFICATIONS

MODEL	FC650134R (WITH LED)				
BLADE SWEEP	130cm	130cm			
MOTOR POWER	35W	35W			
Max. AIRFLOW	$8,359 \text{ m}^3/\text{h}$				
FAN LIGHT	24W dimmable integrated	24W dimmable integrated LED			
LIGHT CONTROL	3-step colour change betw	veen warm white (3000K) and	daylight white (6500K)		
LIGHT COLOUR	3000K	4000K	6500K		
LIGHT OUTPUT	1400lm	1750lm	1400lm		
CONTROLLER	Remote control	Remote control	Remote control		

FAN COLOUR	60CM EXTENSION ROD (FD) INCLUDING WIRING LOOM	90CM EXTENSION ROD (FD) INCLUDING WIRING LOOM
BLACK	FD652600BK	FD652900BK

INSTINCT 54" DC CEILING FAN



• Ceiling to fan base: (LED) 237mm | (NL) 191mm

CEILING FAN FEATURES

- 137cm ceiling fans
- Reversible airflow for summer and winter use
- · Tropically rated
- Metal body with corrosion and UV resistant moulded blades
- Suitable for low ceiling indoor installation
- · 6-speed remote controller included
- · Available with or without colour changing LED light
- 1H/4H/8H fan and light off timer
- · Easy installation with quick connect wiring

CEILING FAN SPECIFICATIONS

MODEL	FC700134 (WITHOUT LIGHT)	FC708134 (WITH LED)			
BLADE SWEEP	137cm	137cm			
MOTOR POWER	35W	35W			
Max. AIRFLOW	8,990 m³/h	8,990 m³/h			
FAN LIGHT	-	18W dimma	ble integrated	d LED	
LIGHT CONTROL	-	4-step colo change bet	ur change or ween warm w	smooth transit hite and day	ional colour light white
LIGHT COLOUR	-	3000K	3500K	4500K	5700K
LIGHT OUTPUT	-	800lm	800lm	1000lm	1000lm
CONTROLLER	Remote control	Remote cor	ntrol		

MOTION SENSOR Hardwired

White

SXSEN002PIR

- · Detects and tracks motion
- 12m detection range
- 360° detection angle.
- IP20







MOTION SENSOR Hardwired IP65

SXSEN003PIR

- Detects and tracks motion
- 12m detection range
- 180° detection angle.
- IP65











UNIVERSAL IR REMOTE

SBIR01

- Can be used to control any IR device such as an air-con or TV
- Comes pre-programmed with a range of popular split system remotes
- Use your existing remote to 'learn' any IR split system remote control

 regardless of make or model
- · In-built temperature and humidity sensor











SMART AC FAN CONTROLLER


SSWF01G / SSWF01G-WIFI

- · Use to convert most AC ceiling fans for smart control
- Zigbee and WiFi versions available; Zigbee requires Mercator Ikuü hub
- 150W max.
- · Neutral wire required



















There has never been a better time to automate your home.

Visit www.ikuu.com.au to see exactly why Mercator Ikuü is the affordable, luxurious and convenient way to control your home

DRONE 60cm Industrial Drum Fan

FF71424BK

Black

- · Long life motor with 100% copper wire
- · Heavy duty gauge steel casing, guard and frame
- · Quality construction with balanced blades
- 360° tiltable head
- 3 speeds rotary switch settings
- · Portable movement assisted by wheels
- Ultra-high 11,780 m³/h airflow
- 1.6m flexible power cord with plug supplied



Portable Fans & Wall Fans

Functional fans ensuring high-grade production. Suitable to any indoor or outdoor space.

DOMINI

BH161ESW



BlackSilver

White

60 W EXHAUST FAN 460 m³/hr





PRODUCT DETAILS

- 3 in 1 bathroom solution
- · High airflow extraction up to 460 m3/hr *
- 1 x 800W heat lamps for instant heating
- Heavy duty metal housing provides durability
- Wall controller with 3 switches included for separate heat, light and fan control
- Triple overheating protections by thermostat, thermal cutout and fuse
- Extra safety protection by contact switch activated heat lamp
- Side entry draft stopper and 1.5m, ø150mm flexible duct included
- Cut-out template included**
- 2 year warranty for heat lamp

MODEL	DESCRIPTION
HEAT LAMP XBH1514	800W, R7S, 2500K
WALL CONTROL FSX90263	3 Gang Switch
DRIVER XBH1616	LED Driver
DRAFT STOPPER XBH1512	Draft Stopper
WALL GRILLE XBH1513	Wall Grille
FRONT PANEL (FASCIA) XBH1611BK/SL/WH	Fascia with LED

	Model	Exhaust Fan	Heater	Light	Air Extraction	Fascia Size	Cut Out Size	Duct Outlet
•	BH161ESW	60W	R7s, 1 x 800W	1 x 13W tricolour LED Warm white/ Neutral White/ Cool White	460m³/hr	457 x 360mm	440 x 320mm	Ø150mm

^{*} Manufacturer supplied data. Actual performance may vary * This product must be installed by a licensed electrician

Exhaust Fans & Bathroom Heaters

Modern styles with superior performance to suit the air movement need of any bathroom, laundry or kitchen.

AC Ceiling Fan & Remote Compatibility

FAN RANGE	FRM86	FRM86G	FRM87	FRM87GL	FRM97	FRM97P
Airnimate	•	•	•		•	
Airventure	•	•	•		•	
Caprice	•	•	•		•	
Caprice Pro						†
Clare	•	•	•		•	
Clarence	•	•	•		•	
Lonsdale	• †	•	•		•	
Luna	•	•	•		•	
Major	•	•	•		•	
Phaser	•	•	•		•	
Swift Metal	•	•	•		•	
Voltan	•	•	•		•	

[†] Fan series with remote includes this remote

MOTOR

PHASER

FC740093 / FC740123 / FC740143 / FC747093 / FC747123 / FC747143



CEILING FAN DIMENSIONS

- Ceiling fan to base: (LED) 350mm | (NL) 336/350mm
- Slope to max. 18°

 Stated dimensions with 153mm rod supplied Longer rods available

CEILING FAN FEATURES

- 92cm, 127cm and 147cm ceiling fans
- Reversible airflow for summer and winter use
- · Tropically rated
- Corrosion and UV resistant moulded ABS body and blades
- · Suitable for indoor or enclosed outdoor installation
- · 3-speed wall controller with light switch included
- · Available with or without tri-colour LED light
 - Remote controller adaptable (sold separately)

CEILING FAN SPECIFICATIONS

MODEL	FC740093 (W/O LIGHT)	FC740123 (W/O LIGHT)	FC740143 (W/O LIGHT)	FC747093 (WITH LED)	FC747123 (WITH LED)	FC747143 (WITH LED)
BLADE SWEEP	92cm	127cm	147cm	92cm	127cm	147cm
MOTOR POWER	75W	75W	85W	75W	75W	75W
Max. AIRFLOW	6,750 m³/h	10,160 m³/h	14,090 m³/h	6,750 m³/h	10,160 m³/h	14,090 m³/h
FAN LIGHT	-	-	-	18W integrated	d LED	
LIGHT COLOUR	-	-	-	3000K Warm White	4000K Neutral White	5700K Daylight
LIGHT OUTPUT	-	-		800lm	950lm	900lm
CONTROLLER	Wall control	Wall control	Wall control	Wall control	Wall control	Wall control

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	REMOTE CONTROLLER
WHITE	FD110600WH + XFC7403	FD110900WH + XFC7404	FRM87 / FRM97 / FRM86 (dimmer remote) / FRM86G (smart remote)



- Brushed Chrome & Black Timber
- Oil-rubbed Bronze & Dark Timber
- White & Light Timber



· Stated dimensions with 127mm rod supplied





CEILING FAN DIMENSIONS

- Ceiling to fan base: (LED) 360mm | (NL) 322mm
- Slope to max. 21°

- 3-speed wall controller with light switch included
 Available with or without dimmable tri-colour
 LED light
- Dimmer sold separately

Longer rods available

- Remote controller adaptable (sold separately)
- · Easy installation with quick connect wiring

CEILING FAN FEATURES

- · 142cm ceiling fans with industrial inspired styling
- · Reversible airflow for summer and winter use
- · Tropically rated
- Metal body with corrosion and UV resistant moulded blades
- Suitable for indoor installation

CEILING FAN SPECIFICATIONS

MODEL	FC760143 (WITHOUT LIGHT)	FC768143 (WITH LED)		
BLADE SWEEP	142cm	142cm		
MOTOR POWER	75W	75W		
Max. AIRFLOW	12,336 m³/h	12,336 m³/h		
FAN LIGHT	-	13W dimmable* integrated LED *dimmer sold separately		
LIGHT COLOUR	-	3000K Warm White	4000K Neutral White	5700K Daylight
LIGHT OUTPUT	-	700lm	750lm	700lm
CONTROLLER	Wall control	Wall control		

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	REMOTE CONTROLLER	
BRUSHED CHROME	FD360600BC + XFC6403	FD360900BC + XFC6404		
OIL RUBBED BRONZE	FD510143RB + XFC6403	FD170114RB + XFC6404	FRM87 / FRM97 / FRM86 (dimmer remote) / FRM86G (smart remote)	
WHITE	FD360600WH + XFC6403	FD360900WH + XFC6404	FRM86Ġ (smart remote)´	

AIRVENTURE 52" AC CEILING FAN

FC580133 / FC587133



CEILING FAN DIMENSIONS

- Ceiling to fan base: (LED) 331mm | (NL) 334mm
- Slope to max. 12°

• Stated dimensions with 100mm rod supplied Longer rods available

CEILING FAN FEATURES

- 132cm ceiling fans with unique design details
- Reversible airflow for summer and winter use
- · Tropically rated
- Corrosion and UV resistant moulded ABS body and blades
- Suitable for indoor or enclosed outdoor installation
- · 3-speed wall controller with light switch included
- Available with or without dimmable tri-colour LED light
- Remote controller adaptable (sold separately)
- · Packaging serves a fan assembly platform
- Easy installation

CEILING FAN SPECIFICATIONS

MODEL	FC580133 (WITHOUT LIGHT)	FC587133 (WITH LED)			
BLADE SWEEP	132cm	132cm			
MOTOR POWER	57W	57W			
Max. AIRFLOW	10,429 m ³ /h	10,429 m³/h	10,429 m³/h		
FAN LIGHT	-	20W dimmable* integrated administrated separately	20W dimmable* integrated LED *dimmer sold separately		
LIGHT COLOUR	-	3000K Warm White	4000K Neutral White	5700K Daylight	
LIGHT OUTPUT	-	1400lm	1550lm	1550lm	
CONTROLLER	Wall control	Wall control			

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	REMOTE CONTROLLER
BLACK	FD360600BK + XFC6403	FD360900BK + XFC6404	FRM87 / FRM97 /
WHITE	FD360600WH + XFC6403	FD360900WH + XFC6404	FRM86 (dimmer remote) / FRM86G (smart remote)

AIRNIMATE 52" AC CEILING FAN



CEILING FAN DIMENSIONS

- Ceiling to fan base: (LED) 370mm | (NL) 335mm
- Slope to max. 15°

CEILING FAN FEATURES

- · 132cm ceiling fans
- · Reversible airflow for summer and winter use
- Tropically rated
- Corrosion and UV resistant moulded ABS body and blades
- Suitable for indoor and enclosed outdoor installation
- 3-speed wall controller with light switch included
- Available with or without dimmable tri-colour LED light
- Dimmer sold separately
- Remote controller adaptable (sold separately)
- · Packaging serves as fan assembly platform
- · Easy installation with quick connect wiring

CEILING FAN SPECIFICATIONS

MODEL	FC770134 (WITHOUT LIGHT)	FC777134 (WITH LED)		
MOTOR POWER	60W	60W		
Max. AIRFLOW	9,667 m³/h	9,667 m³/h		
FAN LIGHT	-	20W dimmable* integrated administrated separately	d LED	
LIGHT COLOUR	-	3000K Warm White	4000K Neutral White	5000K Daylight
CONTROLLER	Wall control	Wall control		

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	REMOTE CONTROLLER
BLACK	FD360600BK + XFC6403	FD360900BK + XFC6404	FRM87 / FRM97 /
WHITE	FD360600WH + XFC6403	FD360900WH + XFC6404	FRM86 (dimmer remote) / FRM86G (smart remote)

LUNA 52" AC CEILING FAN

FC550134 / FC557134



without-light version available







White







CEILING FAN DIMENSIONS

- Ceiling to fan base: (LED) 343mm | (NL) 300mm
- E: Slope to max. 21°

 Stated dimensions with 127mm rod supplied Longer rods available

CEILING FAN FEATURES

- · 132cm ceiling fans
- Reversible airflow for summer and winter use
- · Tropically rated
- · Cast aluminium body with plywood blades
- · Suitable for indoor installation

- 3-speed wall controller with light switch included
- Available with or without fitted LED light
- Remote controller adaptable (sold separately)

CEILING FAN SPECIFICATIONS

MODEL	FC550134 (WITHOUT LIGHT)	FC557134 (WITH LED)
BLADE SWEEP	132cm	132cm
MOTOR POWER	60W	60W
Max. AIRFLOW	9,100 m ³ /h	9,100 m³/h
FAN LIGHT	-	20W dimmable* integrated LED *dimmer sold separately
LIGHT COLOUR	-	4000K Neutral White
LIGHT OUTPUT	-	1200lm
CONTROLLER	Wall control	Wall control

FAN COLOUR	60CM EXTENSION ROD (FD)	90CM EXTENSION ROD (FD)	REMOTE CONTROLLER
BLACK	FD250600BK	FD250900BK	EDN 407 / EDN 407 /
BRUSHED	FD250600BS	FD250900BS	FRM87 / FRM97 / FRM86 (dimmer remote) / FRM86G (smart remote)
WHITE	FD250600WH	FD250900WH	rkiviood (smart remote)

CAPRICE PRO 52" AC CEILING FAN



Ceiling to fan base: (B22) 369mm | (NL) 300mm Slope to max. 20°

- **CEILING FAN FEATURES**
- 132cm ceiling fansReversible airflow for summer and winter use
- Tropically rated
- · Cast aluminium body with plywood blades
- · Suitable for indoor installation
- · 3-speed wall controller or remote controller included
- Available with or without fitted light (B22 or LED)

· Stated dimensions with 127mm rod supplied

• Up to 75% quicker installation time

Longer rods available

- · Large quick connect terminal block for easy wire-off
- · Click and Connect blades for super quick install
- · New & improved hanger bracket
- Screwless canopy, no screw driver needed!

CEILING FAN SPECIFICATIONS

MODEL	FC640134 (WITHOUT LIGHT)	FC642134 (WITH LIGHT)	FC640134R (WITHOUT LIGHT AND REMOTE)	FC642134R (WITH LIGHT AND REMOTE)
BLADE SWEEP	132cm	132cm	132cm	132cm
MOTOR POWER	65W	65W	65W	65W
Max. AIRFLOW	9,210 m³/h	9,210 m³/h	9,210 m³/h	9,210 m³/h
FAN LIGHT	-	Suits two B22 Max. 20W CFL or 10W LED	-	Suits two B22 Max. 20W
LIGHT COLOUR	-	globes (globe sold separately)	-	CFL or 10W LED globes (globe sold separately) max. globe dimension: L110mm x W55mm
LIGHT OUTPUT	-	max. globe dimension: L110mm x W55mm	-	max. globe dimension: L110mm x W55mm
CONTROLLER	Wall control	Wall control	Remote control (FRM97P)	Remote control (FRM97P)

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	REMOTE CONTROLLER
BLACK	FD250600BK + XFC6403	FD250900BK + XFC6404	
BRUSHED STEEL	FD250600BS + XFC6403	FD250900BS + XFC6404	FRM97P
WHITE	FD250600WH + XFC6403	FD250900WH + XFC6404	

Well studied electromechanical technology and durable fan construction that stands the test of time



REASONS FOR CHOOSING AN AC CEILING FAN:

- Can be controlled by a hardwired wall controller or a remote control.
- Wider designs and styles available
- More affordable than comparable DC fan
- Extendable features with advanced smart remote controllers





AC Ceiling Fans





MERCATOR İKUÜ

- App control with scheduling and timers, scenes and automation, speed control, lighting brightness and colour control
- · App works on devices running iOS or Android, see ikuu.com.au for minimum requirements
- Fan uses your 2.4GHz WiFi network See page 59 for more

CEILING FAN DIMENSIONS

- Ceiling to fan base: (LED) 323mm | (NL) 337mm

one clever app



ABS blades









• Slope to max. 10° **CEILING FAN FEATURES**

- · 132cm ceiling fans
- · Reversible airflow for summer and winter use
- · Tropically rated
- Suitable for indoor installation

- Longer rods available
- · Metal body with corrosion and UV resistant moulded · Available with or without colour changing LED light
- · Easy installation with quick connect wiring

CEILING FAN SPECIFICATIONS

MODEL	FC620133G (WITHOUT LIGHT)	FC628133G (WITH LED)
BLADE SWEEP	132cm	132cm
MOTOR POWER	35W	35W
Max. AIRFLOW	10,904 m³/h	10,904 m³/h
FAN LIGHT	-	20W dimmable integrated LED
LIGHT CONTROL	-	4-step colour change or smooth transitional colour change between warm white and daylight white
LIGHT COLOUR	-	3000K 4000K 5000K 5700K
LIGHT OUTPUT	-	900lm 950lm 1000lm 1000lm
CONTROLLER	Remote control	Remote control

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)
BRUSHED CHROME	FD360600BC + XFC8583	FD360900BC + XFC8584
BLACK	FD360600BK + XFC8583	FD360600BK + XFC8584
WHITE	FD360600WH + XFC8583	FD360900WH + XFC8584

RHINO 2.1M 84" DC CEILING FAN





- Graphite & Graphite Finish Brushed Chrome & Black
- **CEILING FAN DIMENSIONS**
- Ceiling to fan base: (LED) 547mm | (NL) 506mm
- 213cm fan Slope to max. 12° (with 300mm rod) or max. 21° (with min. 600mm rod)

• Stated dimensions with 300mm rod supplied





CEILING FAN FEATURES

- · 213cm ceiling fans
- · Reversible airflow for summer and winter use
- · Tropically rated
- · Metal body with aluminium blades
- · Suitable for indoor or enclosed outdoor installation
- · 5-speed remote controller included
- 1H/4H/8H fan timer

Longer rods available

- · Compatible LED light kit available
- · Motor assembly, blade set and light kit sold separately

CEILING FAN SPECIFICATIONS

MODEL	FC479210 + FC47921L (WITHOUT LIGHT)	FLF4781 (LIGHT KIT)
BLADE SWEEP	213cm	-
MOTOR POWER	35W	-
Max. AIRFLOW	22,200 m ³ /h	-
FAN LIGHT	-	20W dimmable integrated LED
LIGHT COLOUR	-	4000K
LIGHT OUTPUT	-	1050lm
CONTROLLER	Remote control	

FAN COLOUR	60CM EXTENSION ROD (FD) INCLUDING WIRING LOOM	90CM EXTENSION ROD (FD) INCLUDING WIRING LOOM	180CM EXTENSION ROD (FD) INCLUDING WIRING LOOM	240CM EXTENSION ROD (FD) INCLUDING WIRING LOOM
BRUSHED CHROME	FD476060BC	FD476090BC	FD476180BC	FD476240BC
GRAPHITE	FD476060GR	FD476090GR	FD476180GR	FD476240GR

EAGLE XL 66" DC CEILING FAN



CEILING FAN DIMENSIONS

- Ceiling to fan base: (LED) 373mm | (NL) 332mm
- Slope to max. 13° (with 127mm rod) or max. 21° (with min. 600mm rod)

· Stated dimensions with 127mm rod supplied Longer rods available

CEILING FAN FEATURES

- · 168cm ceiling fans
- · Uniquely shaped design for stronger airflow
- · Reversible airflow for summer and winter use
- · Tropically rated
- · Metal body with corrosion and UV resistant moulded blades
- · Suitable for indoor installation
- 5-speed remote controller included
- 1H/4H/8H fan timer
- · Available with or without dimmable LED light
- · Easy installation with quick connect wiring

CEILING FAN SPECIFICATIONS

MODEL	FC360163 (WITHOUT LIGHT)	FC368163 (WITH LED)
BLADE SWEEP	168cm	168cm
MOTOR POWER	35W	35W
Max. AIRFLOW	13,500 m³/h	13,500 m³/h
FAN LIGHT	-	12W dimmable integrated LED
LIGHT COLOUR	-	4000K Neutral White
LIGHT OUTPUT	-	900lm
CONTROLLER	Remote control	Remote control

FAN COLOUR	60CM EXTENSION ROD (FD) + WIRING LOOM (XFC)	90CM EXTENSION ROD (FD) + WIRING LOOM (XFC)
BLACK	FD360600BK + XFC3603	FD360900BK + XFC3604
BRUSHED CHROME	FD360600BC + XFC3603	FD231134BC + XFC3604
GRAPHITE	FD360600GR + XFC3603	FD360900GR + XFC3604
OIL RUBBED BRONZE	FD510143RB + XFC3603	FD170114RB + XFC3604
WHITE	FD360600WH + XFC3603	FD360900WH / FD231134WH / + XFC3604 FD240134WH


MINOTA 52" SMART DC CEILING FAN

FC620133G / FC628133G

See page 25 for details





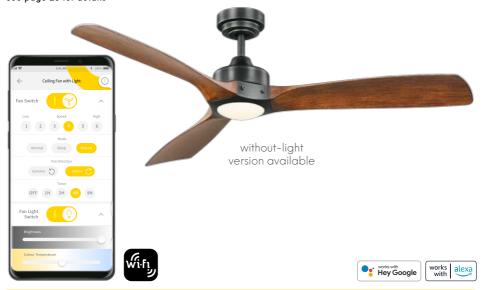

CASA 52" SMART DC CEILING FAN

FC790133G / FC798133G

See page 24 for details





