


20-3-H 2-jaw universal puller with hydraulic spindle, spread 0 mm to 250 mm, reach 210 mm



APPLICATION IMAGE

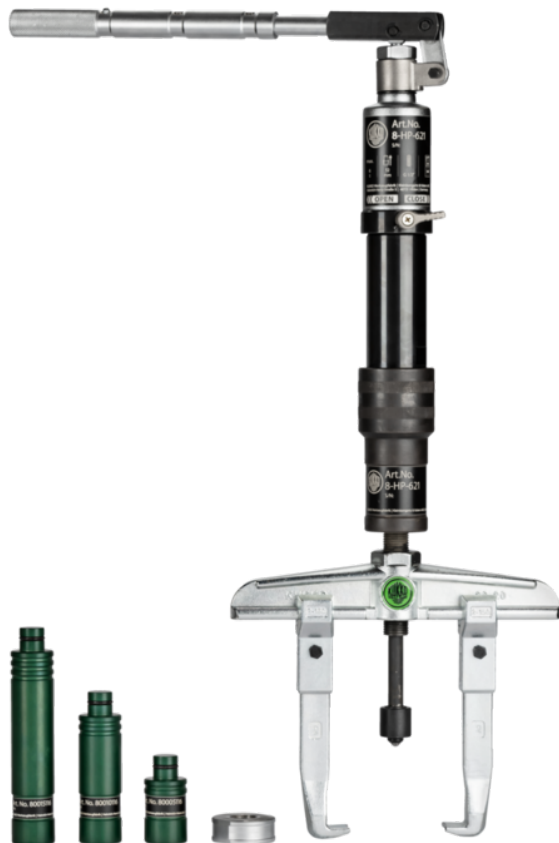

DESCRIPTION

The 2-jaw universal puller with hydraulic spindle is suitable for pulling particularly stubborn bearings, gears, and discs with a pulling force of up to 20 t. Thanks to the integrated grease hydraulic, no external pump is required. The manually extendable lever arm can be swiveled 360°. The flexible connection thread on the spindle allows for the mounting of numerous puller tools from the KUKKO range, depending on thread size.

APPLICATION AREA

For pulling off bearings, gears and pulleys

BENEFIT

- The screw connection allows for easy loosening and particularly tight fastening of the jaws with an allen key
- Application also for eccentric components through freely movable jaws gliding on the crossbar
- Variable adjustment for any span between 0 mm – 250 mm as well as reach depth between 210 mm –
- - Variable adaptation to any span width between xx - xxx mm as well as clamping depth xx - xxx mm
- Nothing
- Anti-slip safety (spindle neck) at the spindle head for safe working with a wrench
- Spindle run-out to protect the thread

OPERATION

- Position the puller jaws on the part to be removed from the outside
- Slide the jaws under the component
- Use a wrench to secure the jaws
- Manually pull the spindle to lock it in place
- Activate the lever arm on the hydraulic pump until the part is released


MASTER DATA

GTIN [EAN]	4021176786839
Country of origin	DE
Case material	Tool steel
Series	20-H
Net weight [kg]	7,53 kg
Package contents	1 piece
Packaging Act	PAP 21
Global sales capability given	Yes (REACH, RoHS, POP, PROP65, TSCA)


SPARE PARTS

- 20-3H-T_Crossbar
- 3-Standard-jaws
- 8-HP-626_Hydraulic spindle with hand lever operation
- 8-HP-EP
- 800_short hydraulic spindle
- 800-150_Extension


2-jaw universal puller with hydraulic
spindle, spread 0 mm to 250 mm, reach
210 mm

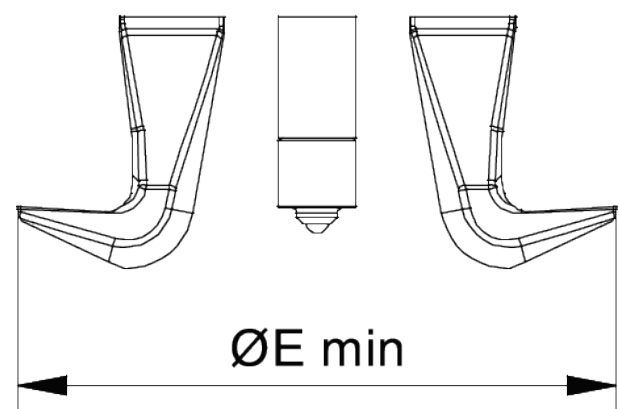


Abbreviation	Attribut	Wert
A	Clamping depth outside pull-off [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN

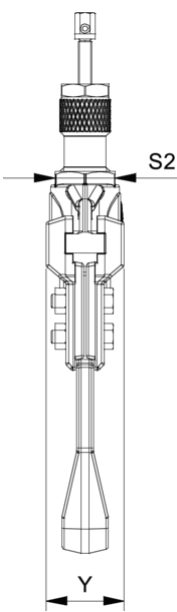

Abbreviation	Attribut	Wert
A	Clamping depth outside pull-off [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN

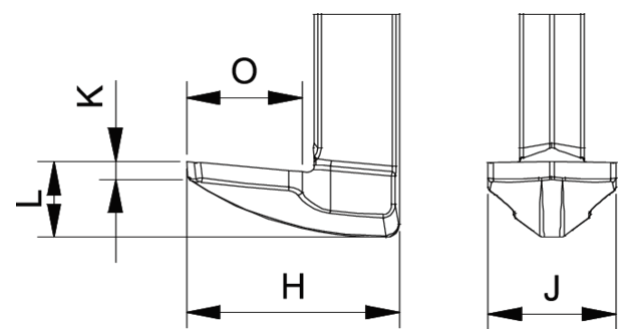


Abbreviation	Attribut	Wert
A	Clamping depth outside pull-off [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN

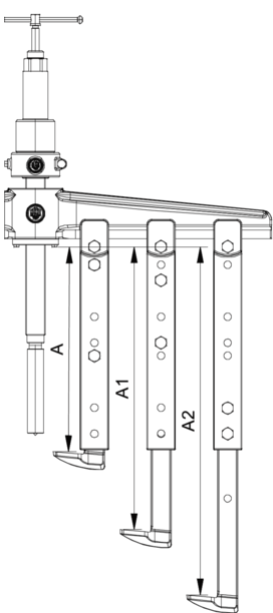


Abbreviation	Attribut	Wert
A	Clamping depth outside pull-off [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm

Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN

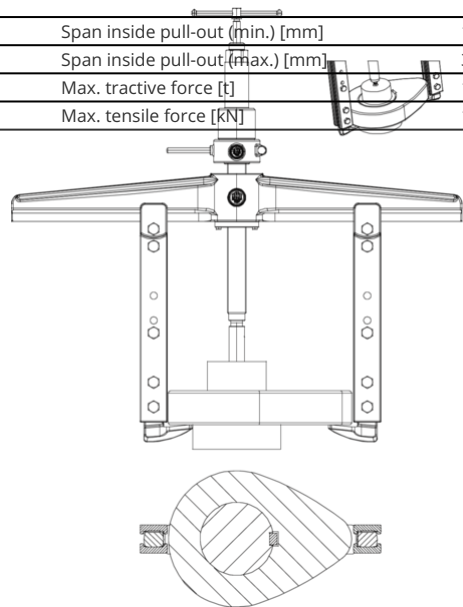

Abbreviation	Attribut	Wert
A	Clamping depth outside pull-off [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN

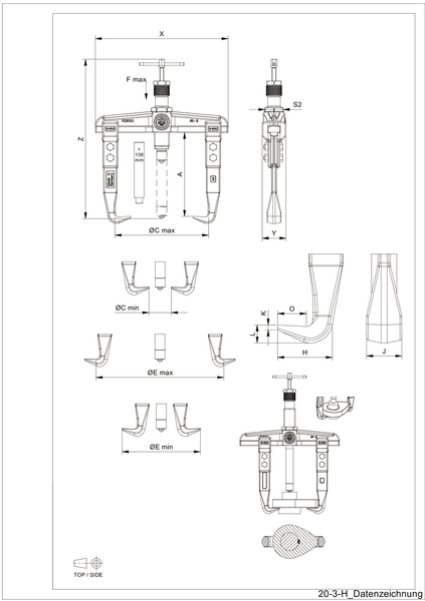

Abbreviation	Attribut	Wert
A	Clamping depth outside pull-off [mm]	210 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	250 mm
Emin	Span inside pull-out (min.) [mm]	180 mm
Emax	Span inside pull-out (max.) [mm]	340 mm
Fmax	Max. tractive force [t]	12 t
Fmax	Max. tensile force [kN]	120 kN