


# ROOF TENT

## Installation Manual

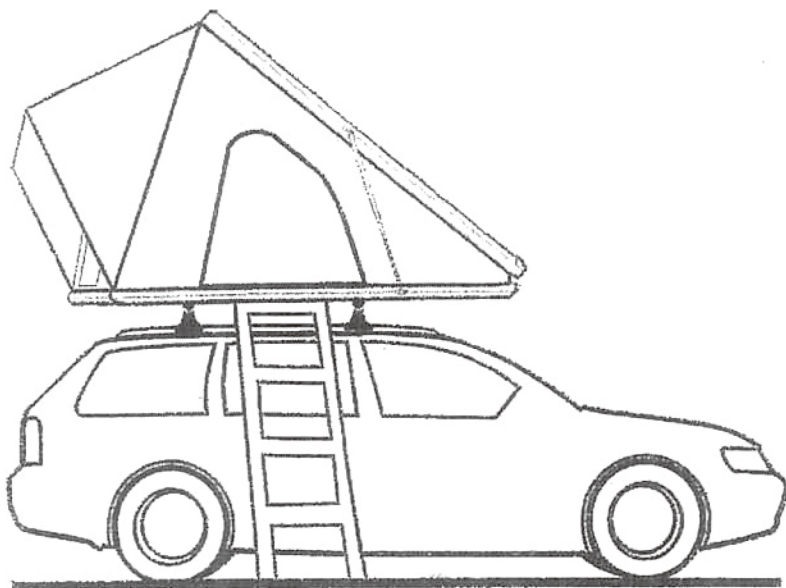

# Instructions





## MOUNTING THE ROOF TENT ON YOUR VEHICLE






### WARNING!








- ❑ If you have any back, knee or any other health complications, do NOT attempt to mount the roof tent on your vehicle.
- ❑ Your vehicle MUST have a roof rack or cross bars installed in order to mount the roof tent.
- ❑ The cross bars MUST have a dynamic weight load of at least 165lbs (75kgs) and MUST be at least 30”(76cm) apart.

It is easiest to mount the roof tent from the side of your vehicle, not from the front or the back.

1. Have two people stand at the front of the roof tent, and two people at the back.
2. Grab the panel on the bottom of the roof tent and lift up to your waist.
3. Lift the roof tent up to your shoulders, and then above your head.
4. Gently slide the roof tent onto your cross bars.
5. Make sure the roof tent is centered.

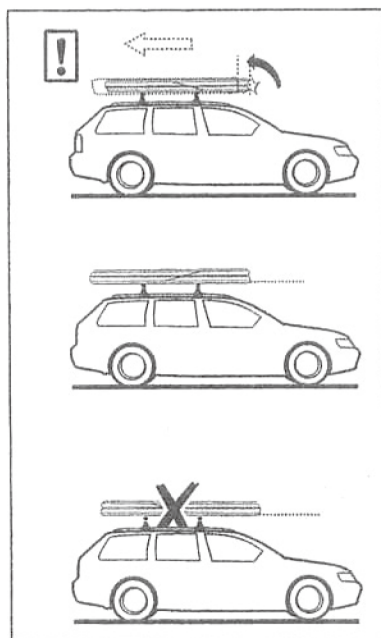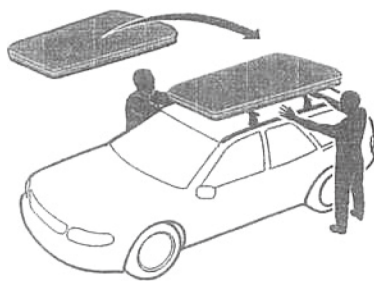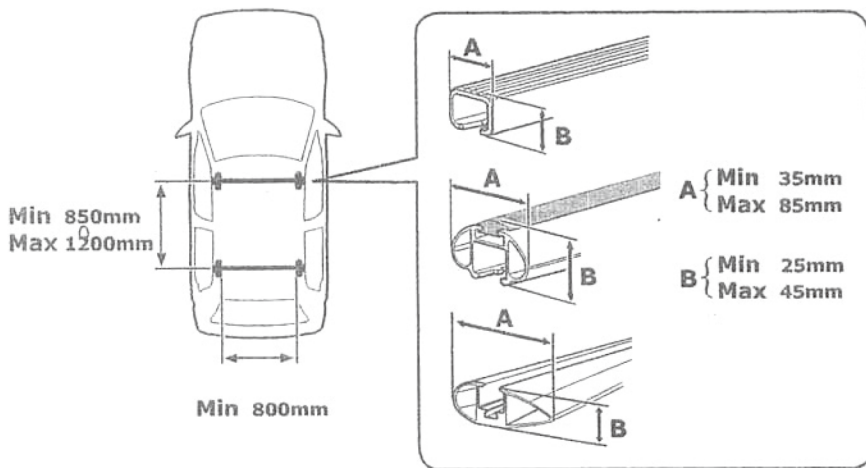

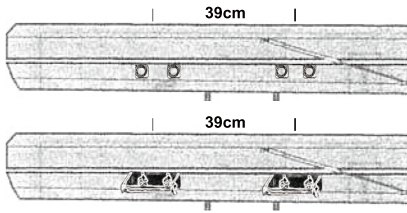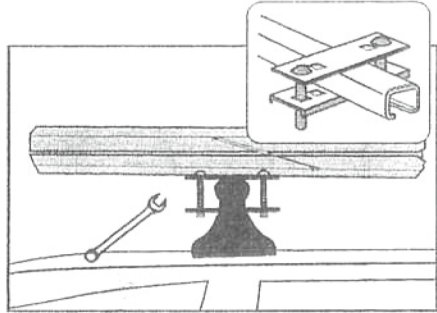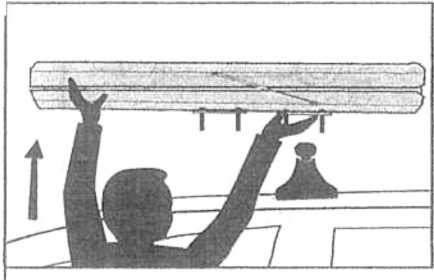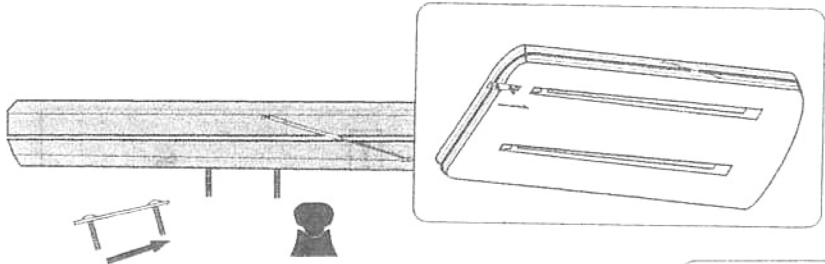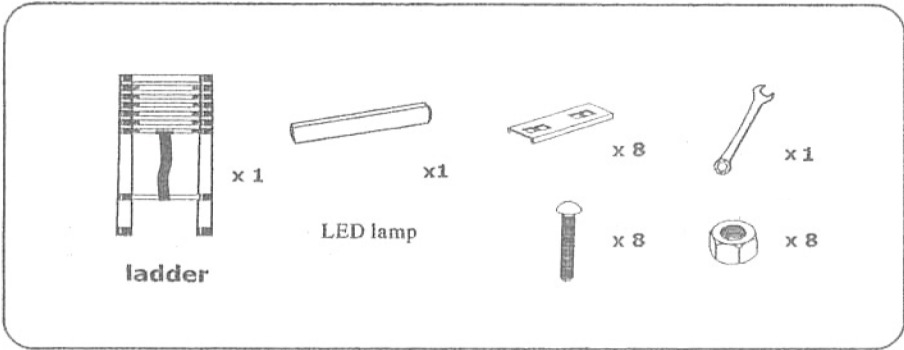

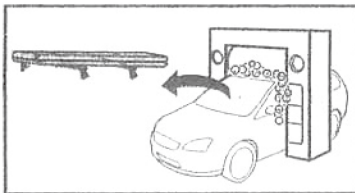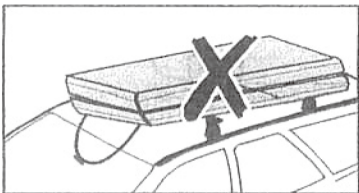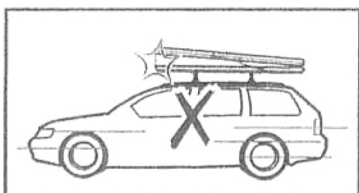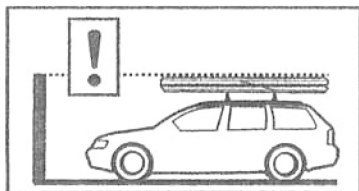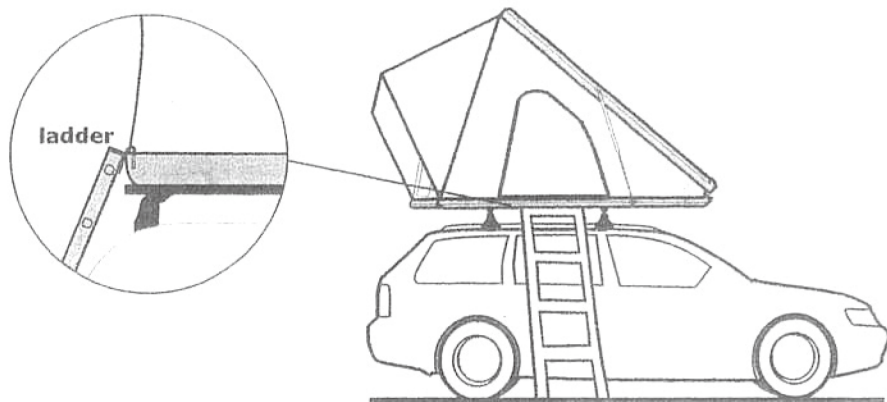

# Telescopic Ladder





**Caution : Please read all of this leaflet carefully before using your telescopic ladder.**

## **Before using:**





1. Please ensure that you are fit enough to use the ladder. Be certain that medical conditions or medication, alcohol or drug abuse are prepared to make the ladder are used in unsafe condition.
2. When transporting ladders on roof bars or in a truck, please ensure they are suitably placed to prevent damage.
3. Inspect the ladder after delivery and before first using to confirm condition and operation of all parts.
4. Visually check the ladder is damaged or not and be sure it is safe to use at the start of each working day when the ladder is not to be used.
5. For professional users, regular periodic inspection is required.
6. Ensure the ladder is suitable for the task.
7. Do not use a damaged ladder.
8. Remove any contamination from the ladder, such as wet paint, mud, oil or snow.
9. Before using a ladder at work, a risk assessment should be carried out respecting the legislation in the country of use.

## **Positioning and erecting the ladder:**

1. Inclination angle should not exceed 75 degree.
2. Ladder shall be on an even, level and unmovable base.
3. Leaning ladder should lean against a flat non-fragile surface and should be secured before using, e.g. tied or use of suitable stability device.
4. When positioning the ladder, please take into account the risk of collision with the ladder e.g. From pedestrians, vehicles or doors (no fire exists) and windows where possible in the work area.
5. Identify any electrical risks in the work area, such as overhead lines or other exposed electrical equipment.
6. Ladder shall be stood on its feet, not the rungs or steps.
7. Ladders shall not be positioned on slippery surface (such as ice, shiny surface or significantly contaminated solid surface) unless additional effective measures are taken to prevent the ladder slipping or ensuring contaminated surfaces are sufficiently clean.

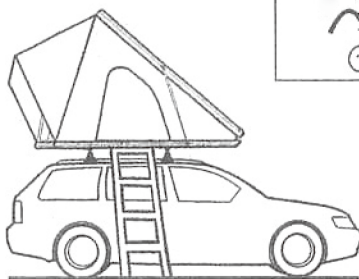

**OPEN THE TENT**

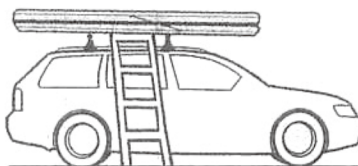

**CLOSE THE TENT**

## Using the ladder:


1. Do not exceed the maximum total load.
2. Do not overreach, user should keep their buckle/navel inside the stiles and both feet on the same step/rung throughout the task.
3. Do not step off a leaning ladder at a higher level without additional security, such as tying off or use of a suitable stability device.
4. Do not use standing ladders of access to another level.
5. Do not stand on the top three steps/rungs of a leaning ladder.
6. Ladders should only be used for light work of short duration.
7. Do not use the ladder outside in adverse weather conditions, such as strong wind.
8. Take precautions against children playing on the ladder.
9. Face the ladder when ascending and descending.
10. Keep a secure grip on the ladder when ascending and descending.
11. Do not use the ladder as a bridge.
12. Wear suitable footwear when climbing a ladder.
13. Avoid excessive side loading e.g. drilling brick and concrete.
14. Do not spend long time on a ladder without regular breaks (tiredness is a risk).

## Open the ladder:

Automatic locking: each rung of your ladder has 2 locking pins are blocked, automatically inserted into the slots of the uprights in place when the ladder is extended.

### The two black buttons in both side:

- Unlocked position (Scheme 4): There is a gap between the buttons and the Spar
- Locked position (Scheme 5): The buttons are located directly on to leg.

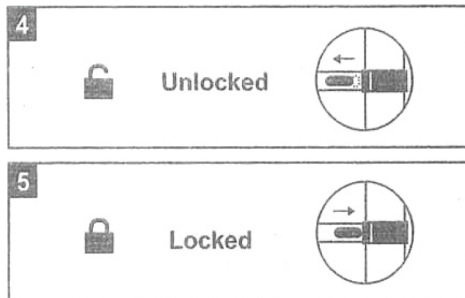





### **Complete the ladder extension :**

The ladder should be on a firm and level ground,move one foot on the lowest rung.

The top-rung off and check if the buttons are locked(Scheme 5).Repeat the process with each of next lower rung,until the arms are completely extended.

### **Partial extension of the ladder:**

- Place ladder on a firm and flat ground,move one foot on the lowest rung.
- The lowest rung off and check if the buttons are locked(Scheme 5).Repeat the process with of the next higher rung,until the arms are completely extended.

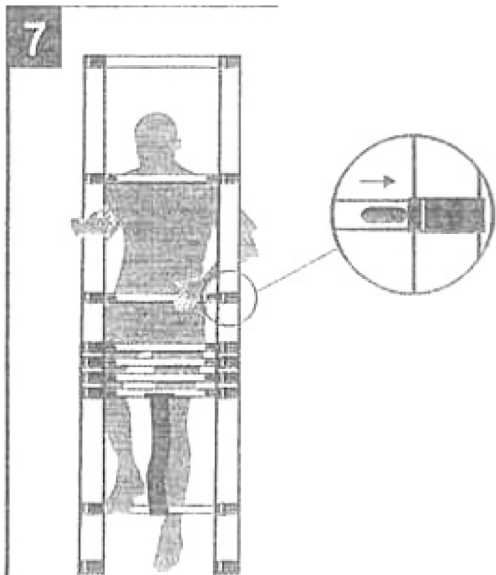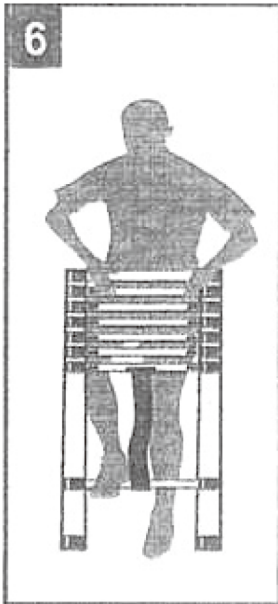

### **Caution:**

Always check that all buttons are on the exact position “Locked”before climbing on the ladder.