




INSTRUCTIONS

Tommy Rail

Accessory for Tommy Wheel Bearing Remover - Ford / Subaru

Tommy Rail is the solution for the most stubborn wheel bearing removal projects by allowing you to exert more pulling power on the entire assembly.

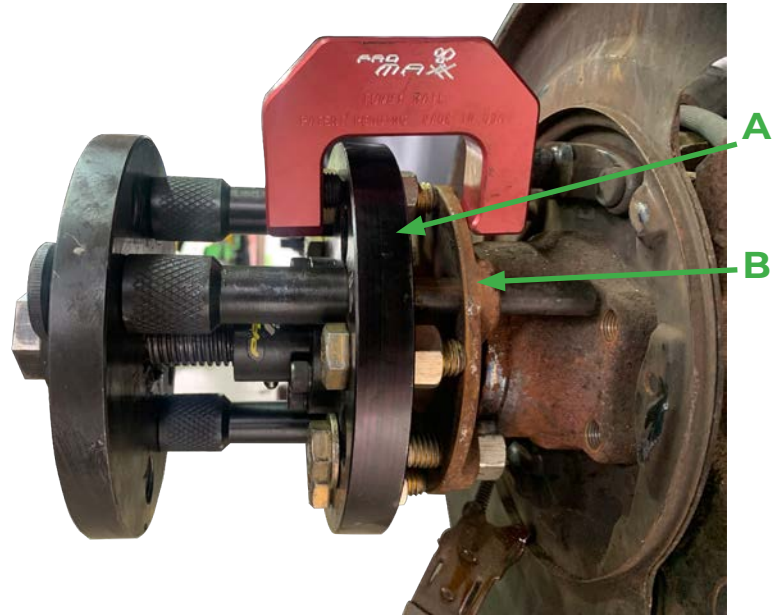

1. Make sure you have completed all of the assembly by following the user guide included in your Tommy Wheel Bearing Removal Kit.
2. Place the Tommy Rail (*PMXTMR100*) on the lower Push Flange (*TPF400*) [A] and the vehicle bearing hub flange [B] at right angles to the two mounting bolts as shown in the image above. Make sure the set screw (*PMXTSS100*) is on the Tommy side, as shown above.
3. Torque the set screw by hand, then use a wrench to apply as much force as possible, squeezing the flanges together. This allows pressure to be applied more evenly on the hub.
4. Follow the remaining steps in your Tommy Wheel Bearing Removal Kit.

All ProMAXX® products are made to the highest quality right here in the USA. ProMAXX® Tool proudly provide limited lifetime warranties and free unlimited technical support. For more information, replacement parts, or to submit comments or questions visit www.promaxxtool.com. For technical support contact (724) 941-0941.

ProMAXX® warrants this product to the original purchaser for its useful life against deficiencies in material and workmanship. This LIMITED LIFETIME WARRANTY does not cover normal wear and tear, and if it is used incorrectly, abused, altered or repaired. Deficient products will be replaced or repaired.

 (724) 941-0941

 www.promaxxtool.com

For video instructions, scan the QR code. Simply hover your phone camera over the image and it will connect you to our fast and easy YouTube™ tutorial.

