



MODEL: HCCA151SPL / HCCA152SPL / HCCA154SPL		
SPEAKER TYPE: SUB WOOFER		
BOX AREA:	114 LTS.	4 FT³
PORT AREA:		
Suggested frequency to set speaker on amplifier and or crossover.		120-80 Hz
Mode to set frequency on amplifier and or crossover.		LOW PASS
Suggested Material.		MDF
thickness of Material.	15 mm	5/8"

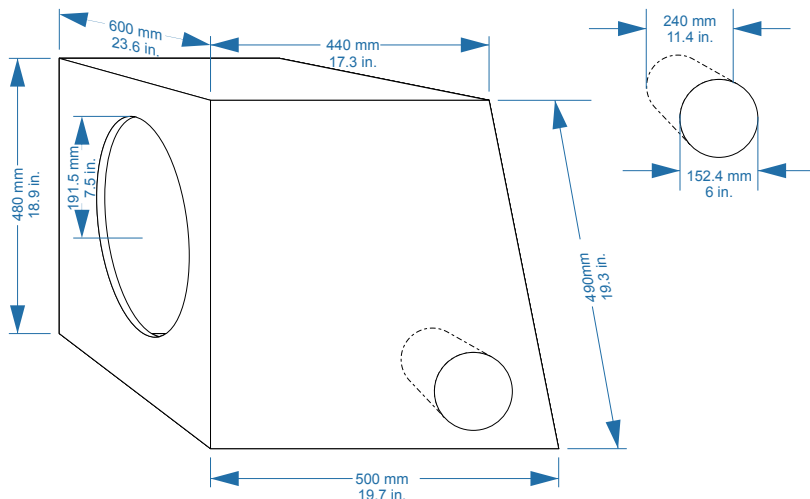

MODEL: HCCA151SPL / HCCA152SPL / HCCA154SPL		
SPEAKER TYPE: SUB WOOFER		
BOX AREA:	110,2 LTS.	3,9 FT³
PORT AREA:	4,35 LTS.	0,15FT³
Suggested frequency to set speaker on amplifier and or crossover.		100-80 Hz
Mode to set frequency on amplifier and or crossover.		LOW PASS
Suggested Material.		MDF
thickness of Material.	15 mm	5/8"

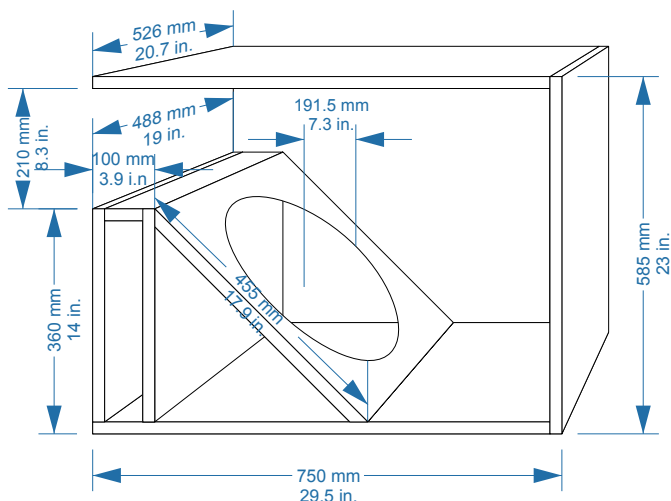

MODEL: HCCA151SPL / HCCA152SPL / HCCA154SPL		
SPEAKER TYPE: SUB WOOFER		
BOX AREA:	153 LTS.	5,4 FT³
PORT AREA:	10,2 LTS.	0,36 FT³
Suggested frequency to set speaker on amplifier and or crossover.		100-80 Hz
Mode to set frequency on amplifier and or crossover.		LOW PASS
Suggested Material.		MDF
thickness of Material.	15 mm	5/8"